




## Ultrabright White LED, Ø 3 mm

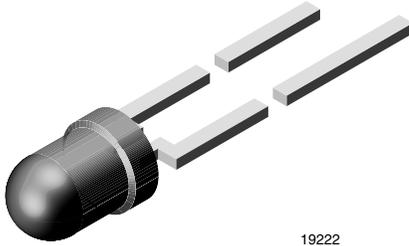

19222

### DESCRIPTION

The VLHW4100 is a clear, untinted 3 mm LED for high end applications where supreme luminous intensity is required.

These lamps utilize the highly developed ultrabright InGaN technologies.

The lens and the viewing angle is optimized to achieve best performance of light output and visibility.

### PRODUCT GROUP AND PACKAGE DATA

- Product group: LED
- Package: 3 mm
- Product series: standard
- Angle of half intensity:  $\pm 22.5^\circ$

### FEATURES

- Clear, untinted lens
- Utilizing ultrabright InGaN technology
- High luminous intensity
- Luminous intensity and color categorized for each packing unit
- ESD-withstand voltage: up to 2 kV according to JESD22-A114-B
- Compliant to RoHS directive 2002/95/EC



RoHS  
COMPLIANT

### APPLICATIONS

- Interior and exterior lighting
- Outdoor LED panels
- Instrumentation and front panel indicators
- Replaces incandescent lamps
- Light guide compatible

### PARTS TABLE

PART	COLOR, LUMINOUS INTENSITY	TECHNOLOGY
VLHW4100	White, $I_V = (4500 \text{ to } 11\,250) \text{ mcd}$	InGaN and converter

### ABSOLUTE MAXIMUM RATINGS VLHW4100 ( $T_{\text{amb}} = 25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT
Reverse voltage		$V_R$	5	V
DC forward current		$I_F$	25	mA
Peak forward current	at 1 kHz, $t_p/T = 0.1$	$I_{FSM}$	0.1	A
Power dissipation		$P_V$	95	mW
Junction temperature		$T_j$	120	$^\circ\text{C}$
Operating temperature range		$T_{\text{amb}}$	- 40 to + 95	$^\circ\text{C}$
Storage temperature range		$T_{\text{stg}}$	- 40 to + 100	$^\circ\text{C}$
Soldering temperature	$t \leq 5 \text{ s}$	$T_{\text{sd}}$	260	$^\circ\text{C}$
Thermal resistance junction/ambient		$R_{\text{thJA}}$	400	K/W

## VLHW4100

Vishay Semiconductors



<b>OPTICAL AND ELECTRICAL CHARACTERISTICS</b> ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified)							
<b>WHITE VLHW4100</b>							
PARAMETER	TEST CONDITION	PART	SYMBOL	MIN.	TYP.	MAX.	UNIT
Luminous intensity	$I_F = 20\text{ mA}$	VLHW4100	$I_V$	4500	7150	11 250	mcd
Chromaticity coordinate x acc. to CIE 1931	$I_F = 20\text{ mA}$		x		0.33		
Chromaticity coordinate y acc. to CIE 1931	$I_F = 20\text{ mA}$		y		0.33		
Angle of half intensity	$I_F = 20\text{ mA}$		$\phi$		$\pm 22.5$		deg
Forward voltage	$I_F = 20\text{ mA}$		$V_F$	2.8	3.2	3.8	V
Reverse current	$V_R = 5\text{ V}$		$I_R$			50	$\mu\text{A}$
Temperature coefficient of $V_F$	$I_F = 20\text{ mA}$		$TC_{VF}$		- 4		mV/K
Temperature coefficient of $I_V$	$I_F = 20\text{ mA}$		$TC_{IV}$		- 0.5		% / K

<b>CHROMATICITY COORDINATED CLASSIFICATION</b>										
	X	Y		X	Y					
YU	0.274	0.301	WL	0.317	0.325	VU				
	0.283	0.284		0.319	0.310					
	0.307	0.316		0.329	0.319					
	0.303	0.333		0.329	0.336					
YL	0.283	0.284		VL	0.329		0.354	UU		
	0.290	0.270			0.329		0.336			
	0.310	0.299			0.345		0.350			
	0.307	0.316			0.347		0.368			
XU	0.303	0.333			UL		0.329		0.336	UL
	0.307	0.316					0.329		0.319	
	0.317	0.325					0.343		0.331	
	0.315	0.343					0.345		0.350	
XL	0.307	0.316	UU			0.347	0.368		UL	
	0.310	0.299				0.345	0.350			
	0.319	0.310				0.361	0.365			
	0.317	0.325				0.364	0.383			
WU	0.315	0.343		UL		0.345	0.350	UL		
	0.317	0.325				0.343	0.331			
	0.329	0.336				0.357	0.343			
	0.329	0.354				0.361	0.365			

Note:

Chromaticity coordinate groups are tested at a current pulse duration of 25 ms and a tolerance of  $\pm 0.01$ .

<b>LUMINOUS INTENSITY CLASSIFICATION</b>		
GROUP	LIGHT INTENSITY (mcd)	
	MIN.	MAX.
Z1	4500	5600
Z2	5600	7150
AA	7150	9000
AB	9000	11 250

Note:

Luminous intensity is tested with an accuracy of  $\pm 15\%$ .


The above type Numbers represent the order groups which include only a few brightness groups. Only one group will be shipped on each reel (there will be no mixing of two groups on each reel). In order to ensure availability, single brightness groups will not be orderable.

In a similar manner for colors where color groups are measured and binned, single color groups will be shipped on any one reel.


In order to ensure availability, single color groups will not be orderable.




**TYPICAL CHARACTERISTICS** ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified)

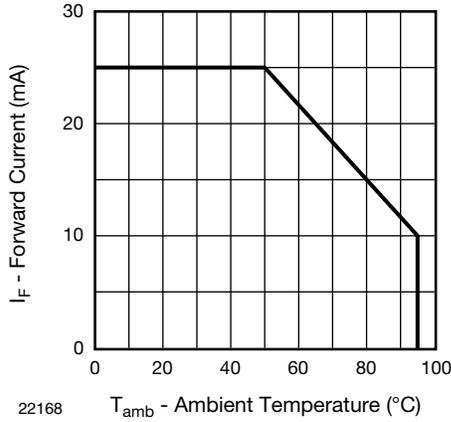


22168  $T_{amb}$  - Ambient Temperature ( $^{\circ}\text{C}$ )  
Figure 1. Forward Current vs. Ambient Temperature

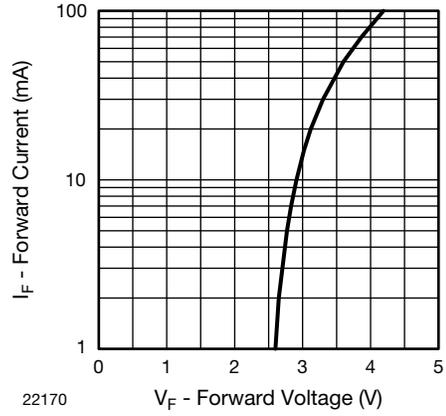


22170  $V_F$  - Forward Voltage (V)  
Figure 4. Forward Current vs. Forward Voltage

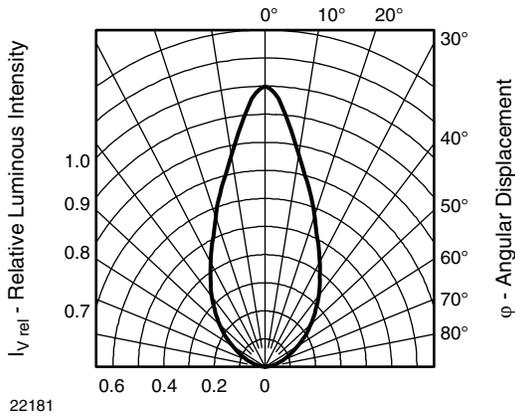


22181  
Figure 2. Relative Luminous Intensity vs. Angular Displacement

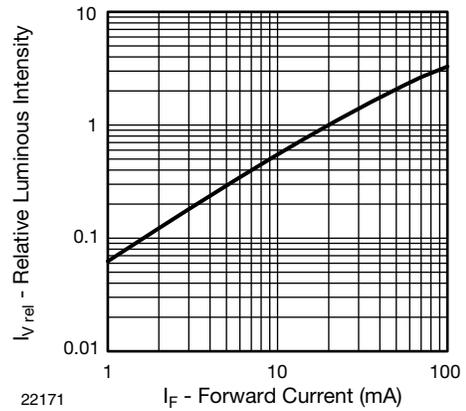

22171  $I_F$  - Forward Current (mA)  
Figure 5. Relative Luminous Flux vs. Forward Current

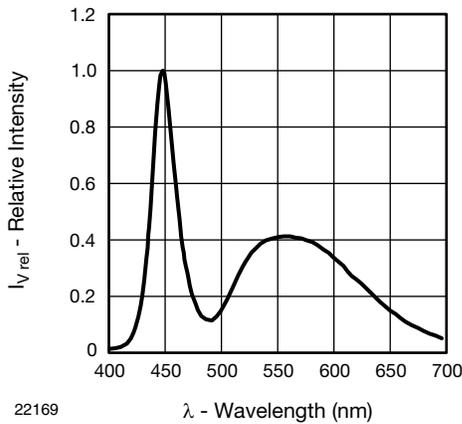

22169  $\lambda$  - Wavelength (nm)  
Figure 3. Relative Intensity vs. Wavelength

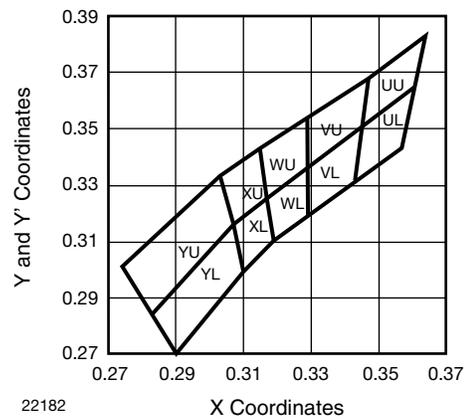



22182  
Figure 6. Coordinates of Colorgroups

# VLHW4100

Vishay Semiconductors



## PACKAGE DIMENSIONS in millimeters

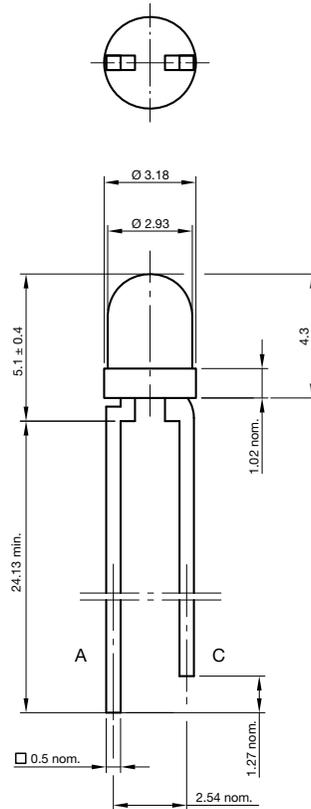


technical drawings  
according to DIN  
specifications

Not indicated tolerances  $\pm 0.25$

Drawing-No.: 6.544-5403.01-4  
Issue: 2; 18.06.10  
21948

## BAR CODE PRODUCT LABEL (example)

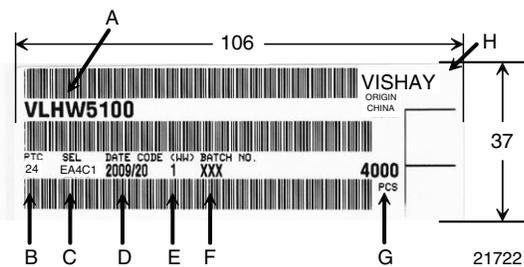

- A) Type of component
- B) Manufacturing plant
- C) SEL - selection code (bin):  
e.g.: EA = code for luminous intensity group  
4C = code for chromaticity coordinate  
1 = code for forward voltage
- D) Date code year/week
- E) Day code (e.g. 1: Monday)
- F) Batch no.
- G) Total quantity
- H) Company code



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.