



LNZ listed

9000**MICROMINIATURE
MOMENTARY
PUSHBUTTON
SWITCHES**Panel
cut-outHow to
order

Contacts
• CD gold plated copper

All types have epoxy sealed terminations

Specifications:



- Current/voltage rating: 100 mA 30 VDC max
- Initial contact resistance: 30mΩ max
- Insulation resistance: 1000MΩ min at 500VDC
- Dielectric strength
 - 500 Vrms 50 Hz between terminations
 - 1000 Vrms 50 Hz between terminations and frame
- Electrical life: 9100 250000 operations
9200 9500 100000 operations
- Torque 0.8 Nm

*** New****Solder lugs / straight terminations / bracket mounting**

Solder lugs		
9532 CD		⌀1.0
9533 CD	9533NCD*	⌀1.0
Straight terminations		
9232 CD		⌀1.0
9233 CD	9233NCD*	⌀1.0
Bracket mounting		
9232Y CD		⌀1.0
9533 9233Y CD	9233NYCD*	⌀1.0

Right angle terminations WW - vertical

9232WWCD		⌀1.0
9233WWCD	9133WWCD*	⌀1.0

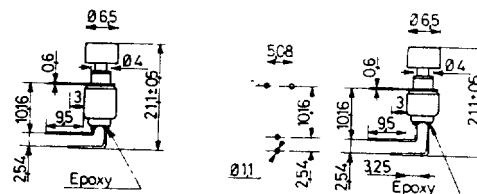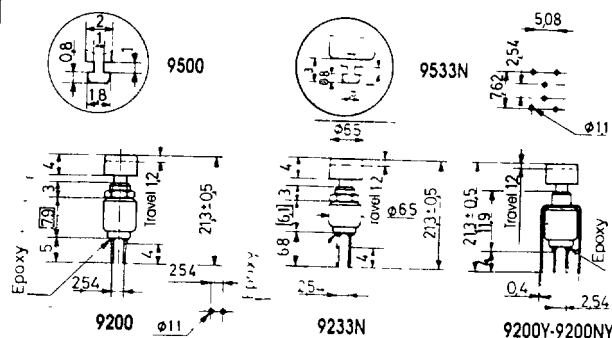

9233WW


9200WW

9133WW

Straight terminations / Bracket mounting

Straight terminations		
9133 CD		⌀1.0
Bracket mounting		
9133Y CD		⌀1.0

9133Y

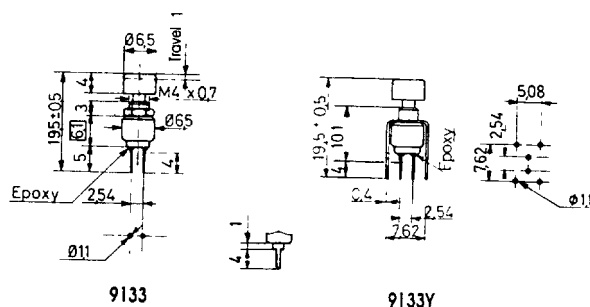

Option


Sealing
(for function 3 only)

caps


Protecting cap
for plain
bushing

Standard nut


Colours :



plunger-0
(flush)



K




standard
U570

U740



U983



nickel plated
U544

- 1 blue
- 2 black
- 3 green
- 4 grey
- 5 yellow
- 6 red
- 7 white
- 9 orange

replace 0 by colour number