

DIGITAL DELAY LINE SERIES 0462 8-PIN SINGLE-IN-LINE 5 TAP

TECHNICAL INFORMATION

TEST CONDITIONS

Pulse Voltage 3.2 Volts
Rise Time 3.0 Nsec (10%-90%)
Pulse Width $1.2 \times$ Total Delay
Pulse Period $4 \times$ Pulse Width
Supply Current, ICCL 60.0 Milliamps typical
Supply Voltage, Vcc 5.0 Volts
Ambient Temperature 25°C

PERFORMANCE CHARACTERISTICS


Delay Tolerance From Input To Tap
 ± 2 Nsec or 5% whichever is greater
Delay Tolerance From Tap To Tap
 ± 2 Nsec or 7% whichever is greater
Performance Characteristics apply at
above listed Test Conditions.

ELECTRICAL CHARACTERISTICS

Supply Voltage, Vcc
4.75 to 5.25 Volts
Logic 1 Input Current
50 Microamp max.
Logic 0 Input Current
- 2 Milliamp max.
Logic 1 Output Voltage
2.7 Volts min.
Logic 0 Output Voltage
0.5 Volts max.
Operating Temperature Range
0°C To 70°C
Temperature Coefficient Of Total Delay
500PPM/°C Typical
Minimum Input Pulse Width
40% Of Total Delay
Maximum Duty Cycle
50%

DRIVE CAPABILITIES

10 TTL Loads/Tap max.
20 TTL Loads/Unit max.
—Compatible with TTL and DTL circuits
—Other delays and tolerances upon
request

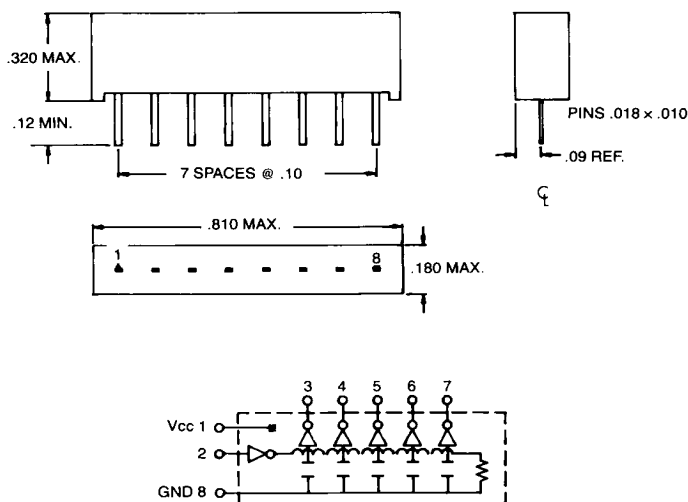

Part Number	Total Delay 1, 3	Delay/Tap 1, 3	Rise Time 2, 3
0462-0025-02	25NS	5NS	4NS
0462-0030-02	30NS	6NS	4NS
0462-0040-02	40NS	8NS	4NS
0462-0050-02	50NS	10NS	4NS
0462-0060-02	60NS	12NS	4NS
0462-0070-02	70NS	14NS	4NS
0462-0080-02	80NS	16NS	4NS
0462-0090-02	90NS	18NS	4NS
0462-0100-02	100NS	20NS	4NS
0462-0125-02	125NS	25NS	4NS
0462-0150-02	150NS	30NS	4NS
0462-0200-02	200NS	40NS	4NS
0462-0250-02	250NS	50NS	4NS
0462-0300-02	300NS	60NS	4NS

1 Delays measured at 1.5 Volts level on Leading Edge only.
2 Rise Times measured from .75 Volts to 2.4 Volts.
3 Measured with no loads on taps.

Specifications Subject To Change Without Notice

BEL FUSE INC./198 VAN VORST STREET/JERSEY CITY, NJ 07302/(201) 432-0463/TWX 710-730-5301/FAX (201) 432-9542 15