


ORDERING INFORMATION





3 E V 0 6 S - 3 3 - AE
 (1) (2) (3) (4) (5) (6) (7)

- 1. SERIES CODE:
- 3E: IEEE 1394 CONNECTOR
- 2. STRUCTURE CODE:
- V: VERTICAL TYPE
- 3. NO. OF CONTACT
- 06: 6 POSITIONS
- 4. CONTACT TYPE:
- S: RECEPTACLE
- 5. COLOR CODE:
- 3: BLACK
- 6. CONTACT FINISH:
- 3: 30U" GOLD PLATED ON CONTACT AREA, TIN-LEAD PLATED ON SOLDER TAIL.
- 7. SUFFIX CODE:
- AE: W/COVER NO EDA LOGO



MATERIAL HOUSING: PBT WITH 15% GLASS FIBER UL 94V-0
 CONTACT: BRASS T=0.20mm, GOLD PLATED OVER NICKEL SHELL. BRASS T=0.40mm, TIN PLATED.

SPECIFICATION
 CURRENT RATING: 1A/CONTACT
 VOLTAGE RATING: 30V AC(r.m.s)
 CONTACT RESISTANCE: INITIAL 30mΩ MAX.
 INSULATION RESISTANCE: 100MΩ MIN.(AT 500 VDC)
 DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 minute.
 DURABILITY: 1500 CYCLES MIN.
 MATING FORCE: 4 kgf MAX.
 UNMATING FORCE: 1 kgf MIN.
 OPERATING TEMPERATURE: -55°C~+85°C

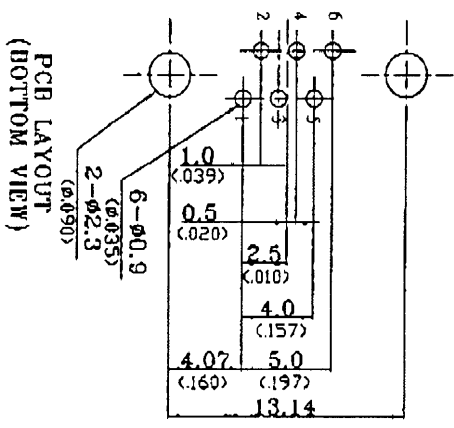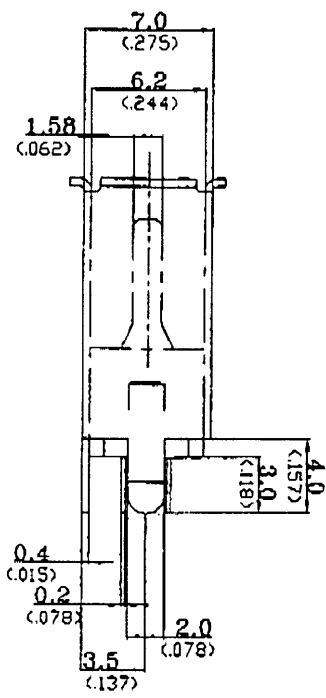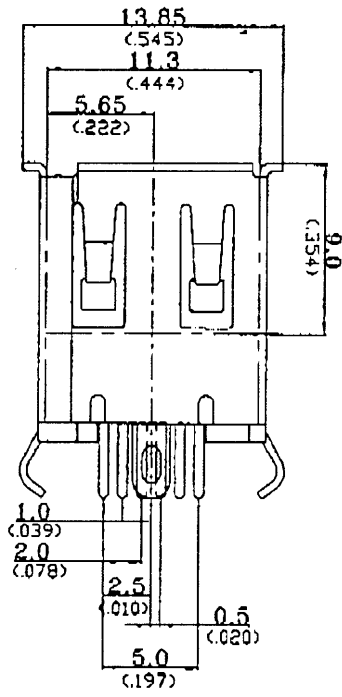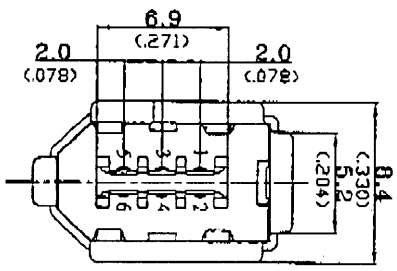

3694033

MATERIAL		TOLERANCE UNSPECIFIED		PART NO.	
FINISH		ANGLE		NAME	
DRAWN TONY 2/21/2001		SCALE 1:1		UNIT mm/inch	
DESIGNER		CHECKED TONY 2/21/2001		DRAWING NO. R-S13EV-2	
APPROVED TONY 2/21/2001		REV 0		REV 0	