


10A,600V Ultrafast Single Diode


Features

- Ultrafast recovery time
- Low forward voltage drop
- Low leakage current
- High reliability by planer design
- Maximum Junction Temperature Range (150°C)

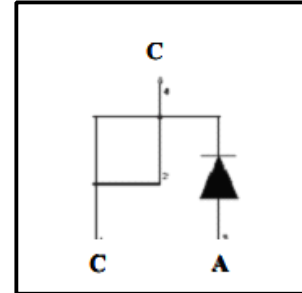

General Description

Winsemi's FRD..series are the state of the are Ultra fast recovery rectifiers specifically designed with optimized performance of forward voltage drop and ultra fast recovery time the planar structure and the platinum doped life time control, guarantee the best over all performance, ruggedness and reliability characteristics.

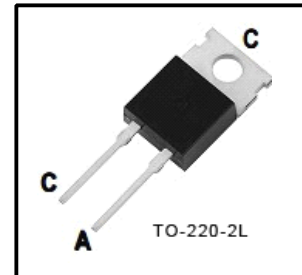

Applications

- Freewheeling, Snubber, Clamp
- Inversion Welder
- PFC
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Converter & Chopper
- UPS

Absolute Maximum Ratings

Symbol	Parameter	Value	Units
V_{RRM}	Peak Repetitive Revers Voltage	600	V
$I_{F(AV)}$	Average Forward Current Square wave, duty=1/2, $T_C=25^\circ\text{C}$	10	A
I_{FM}	Repetitive Peak Forward Current Square wave, 20kHz, $T_C=115^\circ\text{C}$	20	A
I_{FSM}	No-Repetitive Peak Surge current	110	A
P_D	Power Dissipation	50	W
T_{STG}, T_J	Operating Junction Temperature	-40~150	$^\circ\text{C}$
Torque	Module-to-Sink ,Recommended	1.1	N.m

Electrical Characteristics $T_C=25^\circ\text{C}$

Symbol	Parameter	Test Conditions	Value			Units
			Min	Typ	Max	
V_F	Forward Voltage Drop	$I_F=10\text{A}$	-	1.4	1.7	V
		$I_F=20\text{A}$	-	1.7	2.1	V
I_{RRM}	Reverse Current	$V_R=600\text{V}$	-	-	15	μA
		$V_R=600\text{V}, T_C=150^\circ\text{C}$	-	-	500	μA
T_{rr}	Reverse Recovery Time	$I_F=1.0\text{A}, V_R=30, di/dt=50\text{A}/\mu\text{s}$	-	17	23	ns
		$I_F=10\text{A}, V_R=300\text{V}$	-	30	-	ns
$R_{\theta JC}$	Thermal Resistance		-	-	2.5	$^\circ\text{C}/\text{W}$

Typical Performance Curves

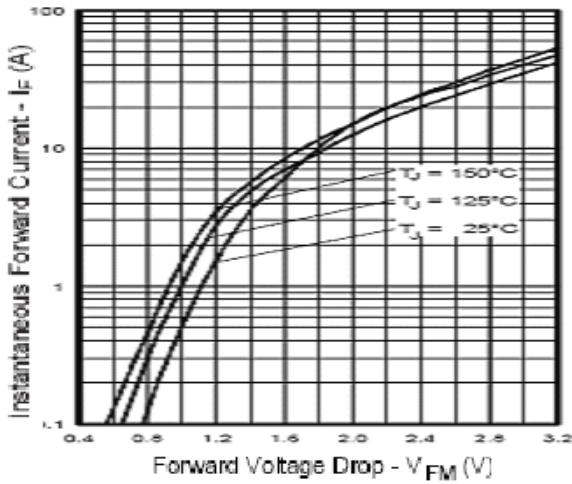


Fig.1 Forward Characteristics

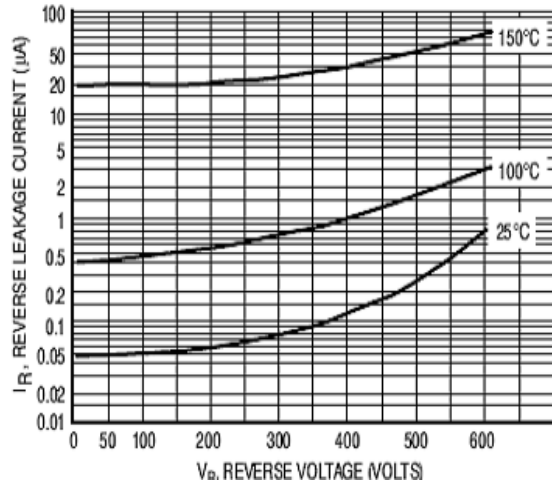


Fig.2 Reverse Characteristics

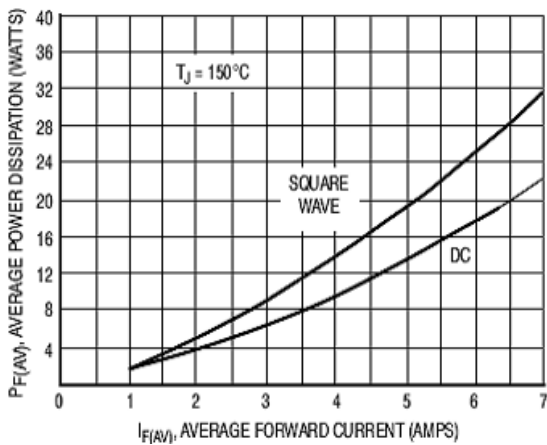


Fig.3 Forward Power Dissipation

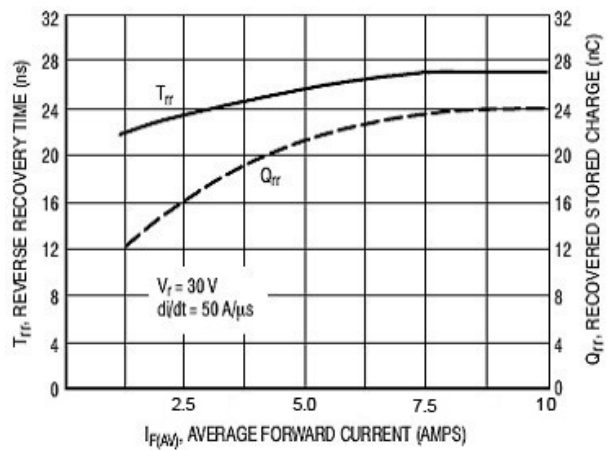


Fig.4 Recovery Characteristics

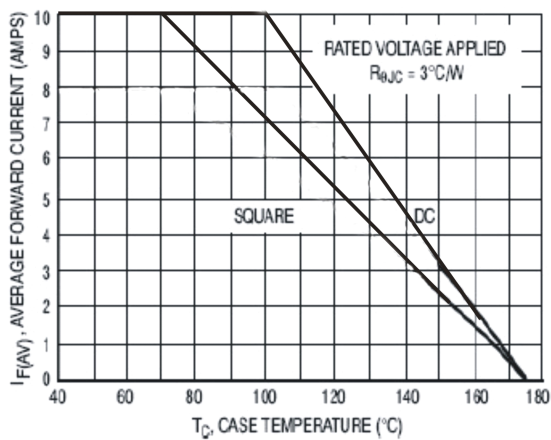


Fig.5 Out Current vs Case Temperature

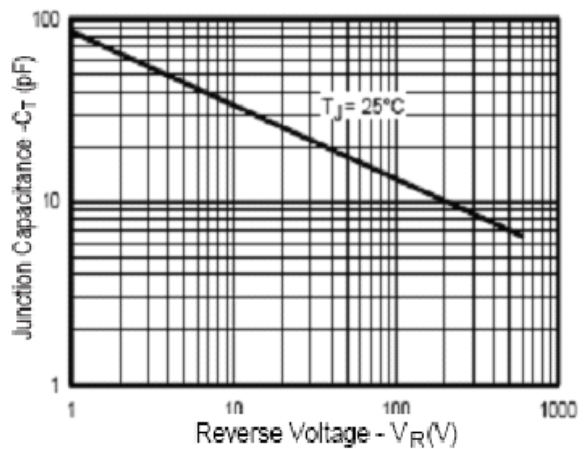


Fig.6 Junction Capacitance vs Reverse Voltage

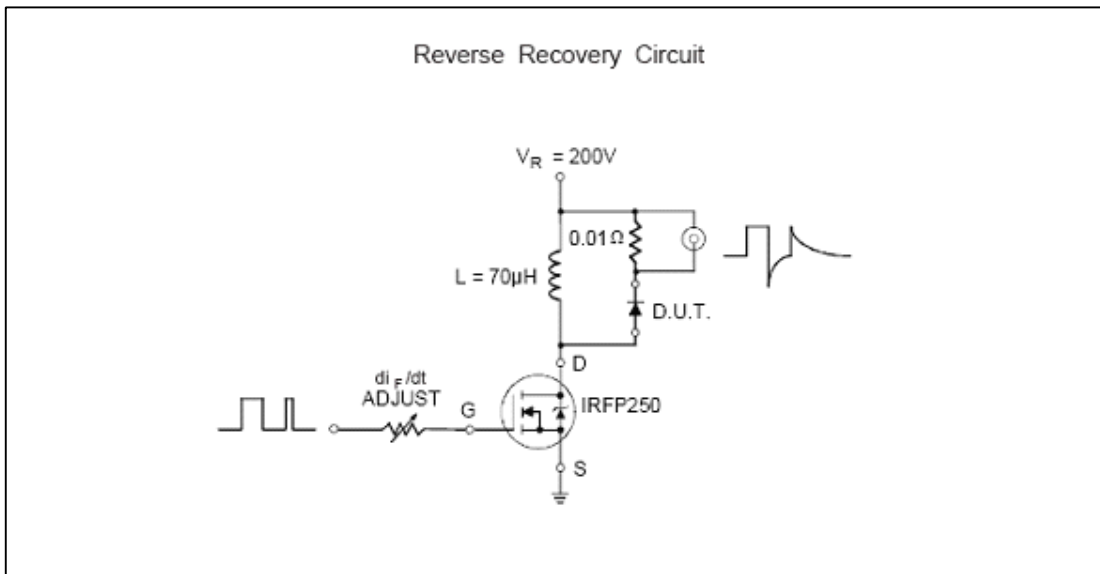


Fig.7 Reverse Recovery Parameter Test circuit

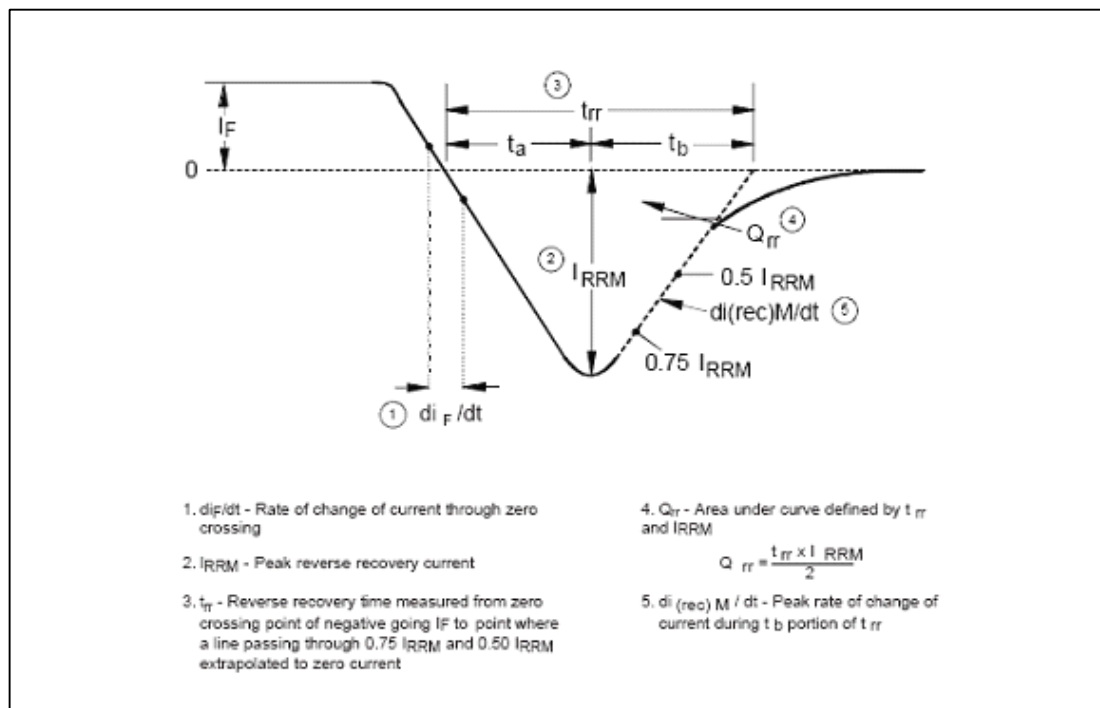


Fig.8 reverse Recovery Waveform and definitions

To-220-2L Package Dimension

