




permanoid

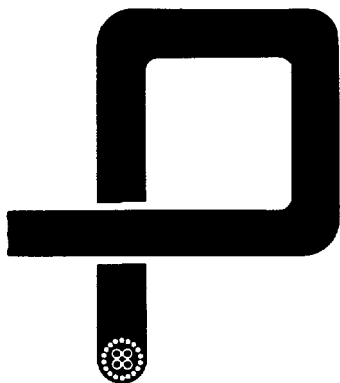

Manufacturers of
Electric Wires, Cables
and Insulating Sleeveings,
P.V.C. Compounds

PERMANOID LIMITED

Registered Office:
Hulme Hall Lane
Manchester, M10 8HH, England
Telephone 061-205 6161/7
Telex 667752 Answerback
PERMMR G
Fax 061-205 9325

Branch at Bristol

152-387

PERMANOID SPEC. 12/X/140

<u>CONDUCTOR</u>	256/0.05mm tinned annealed copper
<u>INSULATION</u>	Silicone rubber to 2.52mm nominal (Type EI2 150°C rating)
<u>CROSS-SECTIONAL AREA</u>	0.5mm ²
<u>TEMPERATURE RANGE</u>	For non-flexing applications -100 to +300°C
<u>CURRENT RATING</u>	5 amps (a correction factor must be used for temperatures above 95°C)
<u>CONDUCTOR RESISTANCE</u>	40.1 ohms/km (max)
