

Directional Couplers


Mini, Octave Bandwidth

2020 Series

V2.00

Features

- Smallest and Lightest Couplers Available
- 0.5 Through 18 GHz, Including Wideband Units
- High Directivity — Low VSWR
- Meets MIL-E-5400 Environments

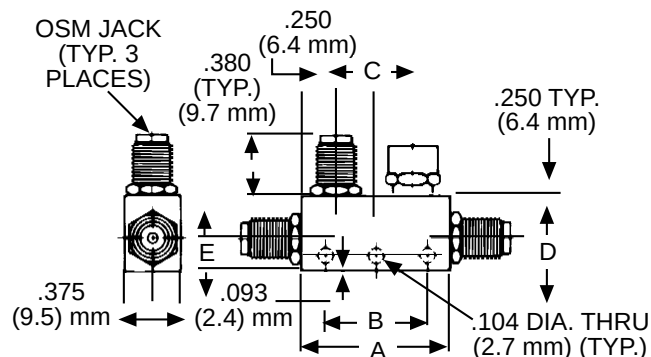

NOTE: All dimensions are ± 0.020 , except mounting hole diameters (± 0.005) and mounting hole location (± 0.010).

Mechanical Specifications

Case Style	A Inch (mm)	B Inch (mm)	C Inch (mm)	D Inch (mm)	E Inch (mm)	Weight	
						oz.	g
1	1.00 (25.4)	N/A	0.50 (12.7)	0.55 (13.9)	0.22 (5.6)	0.62	17.6
2	1.00 (25.4)	N/A	0.50 (12.7)	0.50 (12.7)	0.22 (5.6)	0.60	17.0
3	1.16 (29.4)	0.34 (8.7)	0.66 (16.7)	0.50 (12.7)	0.22 (5.6)	0.64	18.2
4	1.16 (29.4)	0.34 (8.7)	0.66 (16.7)	0.55 (13.9)	0.22 (5.6)	0.67	19.0
5	1.78 (45.2)	0.94 (23.8)	1.28 (32.5)	0.50 (12.7)	0.22 (5.6)	0.82	23.2
6	1.78 (45.2)	0.94 (23.8)	1.28 (32.5)	0.55 (13.9)	0.22 (5.6)	0.87	23.3
7*	3.00 (76.2)	1.00 (25.4)	2.50 (63.5)	0.75 (19.1)	0.31 (7.9)	1.50	43.0
8	1.00 (25.4)	N/A	0.50 (12.7)	0.63 (15.9)	0.22 (5.6)	0.67	19.0

*Case Style 7 has four mounting holes located symmetrically to the two shown dotted in figure.

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883

■ Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

■ Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020

Specifications

Part No.	Case Style	Frequency Range (GHz)	Coupling (Includ. Freq. Sens.) (dB)	Freq. Sens. (dB)	Insert. Loss Max. (dB)	Direct. Min. (dB)	VSWR Max.		Power (Input)			MIL Dash No.	M/A-COM MIL-C-15370/9*** Part No.
							Prim. Line	Sec. Line	Avg. In. (W)	Avg. Refl. (W)	Pk. (kW)		
2020-6600-06	7	0.5 - 1.0	6 ±1.0	±0.60	0.15	25	1.10	1.10	50	4	4	—	—
2020-6601-10	7		10 ±1.0	±0.75	0.15	25	1.10	1.10	50	10	4	—	—
2020-6602-20	7		20 ±1.0	±0.75	0.15	25	1.10	1.10	50	50	4	—	—
2020-6603-30	7		30 ±1.0	±0.75	0.15	25	1.10	1.10	50	50	4	—	—
2020-6604-06	5	1.0 - 2.0	6 ±1.0	±0.60	0.20	25	1.15	1.15	50	4	4	-100	2020-4015-06
2020-6605-10	5		10 ±1.0	±0.75	0.20	25	1.15	1.15	50	10	4	-200	2020-4015-10
2020-6606-20	5		20 ±1.0	±0.75	0.20	25	1.15	1.15	50	50	4	-300	2020-4015-20
2020-6607-30	6		30 ±1.0	±0.75	0.20	25	1.15	1.15	50	50	4	-400	2020-4015-30
2020-6608-06	3	2.0 - 4.0	6 ±1.0	±0.60	0.20	22	1.15	1.15	50	4	4	-500	2020-4016-06
2020-6609-10	3		10 ±1.0	±0.75	0.20	22	1.15	1.15	50	10	4	-600	2020-4016-10
2020-6610-20	3		20 ±1.0	±0.75	0.20	22	1.15	1.15	50	50	4	-700	2020-4016-20
2020-6611-30	4		30 ±1.0	±0.75	0.20	22	1.15	1.15	50	50	4	-800	2020-4106-30
2020-6612-06	2	2.6 - 5.2	6 ±1.0	±0.60	0.25	20	1.25	1.25	50	4	4	—	—
2020-6613-10	2		10 ±1.0	±0.75	0.25	20	1.25	1.25	50	10	4	—	—
2020-6614-20	2		20 ±1.0	±0.75	0.25	20	1.25	1.25	50	50	4	—	—
2020-6615-30	1		30 ±1.0	±0.75	0.25	20	1.25	1.25	50	50	4	—	—
2020-6616-06	2	4.0 - 8.0	6 ±0.75	±0.50	0.25	22	1.25	1.25	50	4	4	-900	2020-4017-06
2020-6617-10	2		10 ±0.75	±0.50	0.25	20	1.25	1.25	50	10	4	-100	2020-4017-10
2020-6618-20	2		20 ±0.75	±0.50	0.25	20	1.25	1.25	50	50	4	-110	2020-4017-20
2020-6619-30	1		30 ±0.75	±0.50	0.25	20	1.25	1.25	50	50	4	—	—
2020-6620-06	2	7.0 - 12.4	6 ±1.0	±0.40	0.40	15	1.35	1.35	50	4	4	-120	2020-4018-06
2020-6621-10	1		10 ±0.75	±0.40	0.40	20	1.30	1.35	50	10	4	-130	2020-4018-10
2020-6622-20	1		20 ±0.75	±0.50	0.30	18	1.25	1.25	50	50	4	-140	2020-4018-20
2020-6623-30	1		30 ±1.0	±0.50	0.30	17	1.35	1.35	50	50	4	-180	2020-4018-30
2020-6624-06	2	7.0 - 18.0	6 ±1.0	±0.50	0.60	15	1.35	1.35	50	4	3	—	—
2020-6625-10	1		10 ±1.0	±0.50	0.40	20	1.30	1.40	50	10	3	—	—
2020-6626-20	1		20 ±1.0	±0.75	0.50	15**	1.45	1.45	50	50	3	—	—
2020-6627-30	8		30 ±1.0	±0.75	0.50	15**	1.45	1.45	50	50	3	—	—
2020-6628-06	2	12.4 - 18.0	6 ±0.75	±0.40	0.60	15	1.40	1.40	50	4	2	—	—
2020-6629-10	1		10 ±0.75	±0.40	0.40	20	1.30	1.40	50	10	2	—	—
2020-6630-20	1		20 ±0.75	±0.50	0.50	15	1.45	1.45	50	50	2	-17	2020-4114-20
2020-6631-30	8		30 ±0.75	±0.50	0.50	12	1.45	1.45	50	50	2	—	—

** 12 dB from 12.4 to 18.0 GHz.

***MIL spec. parts are offered after a First Article test is performed and approved per procedure GFA0067 in accordance with MIL-C-15370 Rev F. Consult Field Sales for pricing.

Specifications Subject to Change Without Notice.