








THICKNESS:
0.8 ~ 1.2 (X=20.3)
1.3 ~ 2.0 (X=20.5)

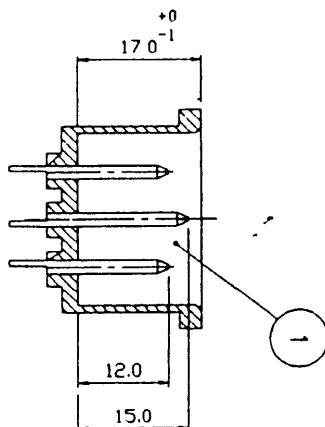

ALTERNATE TERMINAL

- A: MATERIAL:
1.HOUSING: THERMOPLASTIC
2.TERMINAL: COPPER ALLOY
B: CHARACTERISTICS:
1.RATING: 15A 250V $\tilde{A}$ C NORTH AMERICA
10A 250V $\tilde{A}$ C EUROPE
2.INSULATION RESISTANCE: OVER 100M Ω 500VDC
3.DIELECTRIC STRENGTH: 2000V AC ONE MINUTE
C: APPROVALS:
UL,CSA,VDE,SEV,SEMKO,DEMKO,NEMKO,SETI & CB
D: ORDERING OPTION GUIDE:

E: SPECIFICATION:

ORDER#	ITEM REQ.	TERMINAL DIFFERENCE	CODE
0182-PS	① + ②	2.5mm/SOLDER TABS	-S
0182-PN	① + ③	4.0mm/SOLDER TABS	-N
0182-PO	① + ④	4.8mm/.187"OD/SOLDER TABS	-Q
0182-PW	① + ⑤	6.3mm/.250"FAST-ON TABS	-W

ITEM	PART NO.	PART NAME	Q'TY	SPECIFICATION	MATERIAL	REMARKS
⑤	T-0182	TERMINAL	1SET	6.3X0.8T	COPPER ALLOY	TIN-PLATED
④	T-0182	TERMINAL	1SET	4.8X0.8T	COPPER ALLOY	TIN-PLATED
③	T-0182	TERMINAL	1SET	4.0X0.8T	COPPER ALLOY	TIN-PLATED
②	T-0182	TERMINAL	1SET	2.5X0.8T	COPPER ALLOY	TIN-PLATED
①	H-0182	HOUSING	1	SM4-IN TYPE	THERMOPLASTIC	

名稱	AC INLET 3P PUSH-IN MOUNTING		比例	1 / 1
材質	PA66	單位	M / M	第三角 
圖號	0182	核對		
編號	LSA4	設計		
		DIMENSION		ANGULAR
		0-6 6-30 30-120	±0.1 ±0.2 ±0.3	±0.5°

M-0810-598-724