


Mechanical Buzzer (DC)

CANOPUS

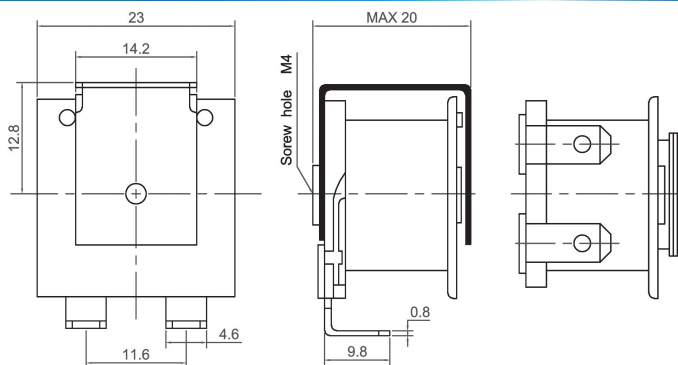


CMEB2320


Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Fundamental Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CMEB2320J00BE	70~150VAC	110VAC	25	75 at 10cm	-	Continuous	-25 ~ +75	ABS	20
CMEB2320K00BE	160~260VAC	230VAC	30	78 at 10cm	-	Continuous	-25 ~ +75	ABS	20



CMEB2418

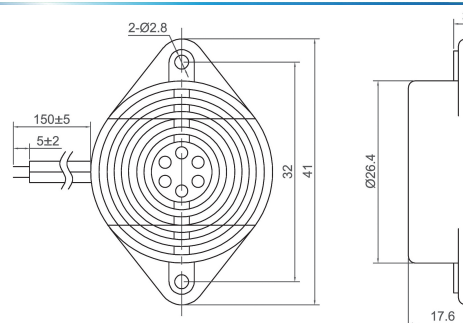

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Fundamental Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CMEB2418F04BW	4 ~ 8	6	33	95 at 10cm	400±100	Continuous	-20 ~ +60	ABS	17
CMEB2418H04BW	7 ~ 16	12	23	95 at 10cm	400±100	Continuous	-20 ~ +60	ABS	17
CMEB2418I04BW	20 ~ 28	24	21	95 at 10cm	400±100	Continuous	-20 ~ +60	ABS	17

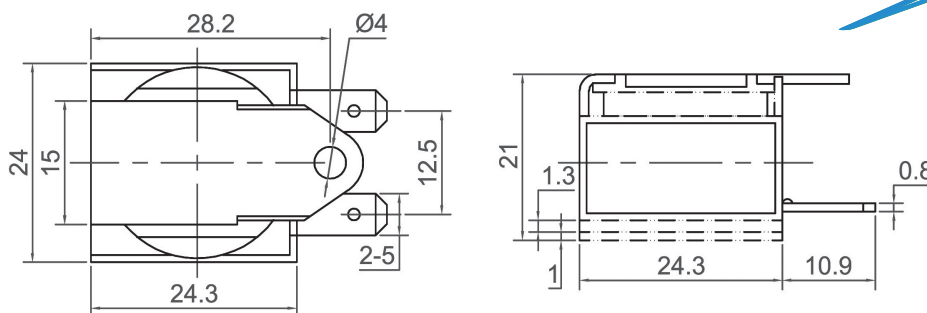

CMEB2421

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Fundamental Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CMEB2421K00TE	160~260VAC	230VAC	30	83 at 10cm	-	Continuous	-20 ~ +60	PBT	34

Your Efficient Supplier
www.canopus.com.hk

TEL.: (852) 2806 2812

Fax: (852) 2652 2216