

ZELIO-TIME™ Timers

RE7, RE8, and RE9

Catalog

04

File 9050



CONTENTS

Description	Page
RE7 Application Data	2
RE7 Multifunction Timers	6
RE7 On Delay Timers	8
RE7 On Delay and Off Delay Timers	10
RE7 Off Delay Timers	12
RE7 Interval Timers	14
RE7 Repeat Cycle Timers	16
RE7 Star-Delta Timers	18
RE7 Dimensions and Wiring	20–21
RE8 Timers	22
RE9 Timers	30



ZELIO-TIME™ Timers - RE7

Application Data



The RE7 timers, with only 23 catalog numbers, covers most timing applications.

These timers offer multi-range timing from 50 ms to 300 hours.

They are multi-voltage.

Three models combine several different functions: multifunction timers.

These products have a transparent cover on the front to avoid any involuntary intervention on the measurement. This cover can be sealed.

Application Data

Conforming to Standards		IEC 61812-1, EN 61812-1
Product Certifications		 File E164353 CNN NKCR  File LR 89150 Guide 3211 07  GL
Ambient Air Temperature Around the Device	Storage	-40 to 185 °F (-40 to + 85 °C)
	Operation	-4 to 140 °F (-20 to + 60 °C)
Permissible Relative Humidity Range	Conforming to IEC 60721-3-3	15 to 85% Environmental Class 3K3
Vibration Resistance	Conforming to IEC 60068-2-6, 10 to 55 Hz	a = 0.35 ms
Shock Resistance	Conforming to IEC 60068-2-27	15 gn - 11 ms
Degree of Protection	Housing	IP 50
	Terminals	IP 20
Degree of Pollution	Conforming to IEC 60664-1	3 Ue = 300 V
Overvoltage Category	Conforming to IEC 60664-1	III Ue = 300 V
Rated Insulation Voltage Between contact circuit and power supply or between contact circuit and control inputs	Conforming to IEC	250 V
	Conforming to UL and CSA	300 V
Test Voltage for Insulation Tests	Dielectric test	UL and CSA 2200 Vac, IEC 2000 Vac
	Shock wave	4800 V
Voltage Limits	Power supply circuit	0.85-1.1 Uc
Disconnection Value	Power supply circuit	> 0.1 Uc
Mounting Position without Derating	In relation to the normal vertical mounting position	Any position
Connection Maximum Cross-Section	Stranded wire without cable end	2 # 14 AWG (2 x 2.5 mm ²)
	Stranded wire with cable end	2 # 16 AWG (2 x 1.5 mm ²)
Tightening Torque		4.5-9.9 lb-in (0.5-1.1 N•m)

Immunity from Electromagnetic Interference (EMC) (Application Class 2 Conforming to EN 61812-1)

Electrostatic Discharge	Conforming to IEC 61000-4-2	Level 3 (6 kV contact, 8 kV air)
Electromagnetic Fields	Conforming to IEC 61000-4-3	Level 3 (10 V/m)
Rapid Transients	Conforming to IEC 61000-4-4	Level 3 (2 kV output power, 1 kV control)
Shock Waves	Conforming to IEC 61000-4-5	Level 3 (2 kV common mode, 1 kV differential mode)
Radiated and Conducted Emissions	CISPR11	Group 1 Class A
	CISPR22	Class A

Consumption

Consumption		24 Vac	48 Vac	110 Vac	240 Vac	24 Vdc	48 Vdc	110 Vdc	240 Vdc
		VA				W			
		RE7●●11BU	0.7	1.6	1.8	8.5	0.5	1.2	–
RE7●●12BU and RE7●●13BU	1.2	2	2.8	12.5	0.8	1.6	–	–	
RE7●●●MW ■	2	2.5	3.2	6	2	1	3.2	2	


■ RE7RB●●MW: Peak current when switched on = 1 A/30 ms.

Time Delay Specifications

Setting Accuracy	As % of the full scale value	± 10 %
Repeat Accuracy		± 0.2 %
Influence of Voltage	In the voltage range, 0.85-1.1 Un	< 0.2 %/V
Influence of Temperature		< 0.07 %/°K
Immunity to Micro-Breaks		3 ms
Minimum Control Pulse		20 ms (except RE7RB1•MW: 1 s)
Reset Time		50 ms


**Curve 1 ■
AC Load**

Electrical durability of contacts on resistive load in millions of operating cycles



Curve 2 ■

Reduction factor k for inductive loads (applies to values taken from the durability curve above)



Example:

An LC1F185 contactor supplied with 115 V/50 Hz for a consumption of 55 VA or a current consumption equal to 0.1 A and $\cos \varphi = 0.3$.


For 0.1 A, Curve 1 indicates a durability of approximately 1.5 million operating cycles.

As the load is inductive, it is necessary to apply a reduction coefficient k to this number of cycles, as indicated by curve 2.

For $\cos \varphi = 0.3$: $k = 0.6$

The electrical durability therefore becomes:

(1.5×10^6) operating cycles $\times 0.6 = 900,000$ operating cycles.




Output Circuit Specifications

Mechanical Durability ■	In millions of operating cycles	20 (10 for RE7RB1•MW) ■		
Current Limit Ith		8 A		
Rated Operational Limits at 70 °C				
		24 V	115 V	250 V
Conforming to IEC 60947-5-1/1991 and VDE 0660	AC-15 N/C contact	3 A	3 A	3 A
	AC-15 N/O contact	5 A	5 A	5 A
	DC-13 N/O contact	2 A	0.2 A	0.1 A
UL and CSA Current Ratings	Resistive Rating	5 A		
NEMA / UL B300	Inductive Rating	3600 VA Make Rating 360 VA Break Rating 5 A Carry		
Minimum Switching Power		12 V/10 mA ■		
Contact Material		Silver Nickel 90/10		

Remote Control Input Specifications

Signal Delivered by Y1-Z2, X1-Z2, X2-Z2 Control Inputs ⚠ No galvanic insulation between these inputs and the power supply	Switching current	< 1 mA
	Maximum distance	164 ft (50 m)
	Compatibility	3/4-wire PNP and NPN Telemecanique sensors or other sensors without an internal load
Potentiometer for Connection between terminals Z1-Z2, Z3-Z2	Type	Linear at ± 20 %
	Resistance	47 ± 20 % kΩ
	Power	0.2 W
	Maximum distance	82 ft (25 m) per shielded cable: shielding linked to terminal Z2

**DC Load ■
Load Limit Curve**



1 L/R = 20 ms

2 L/R with load protection diode

3 Resistive load

■ The product life expressed above is based on average usage and normal operating conditions. Actual operating life will vary with conditions. The above statements are not intended to, nor shall they create any expressed or implied warranties as to product operation or life. For information on the listed warranty offered on this product, refer to the terms and conditions of sale found in the Digest.

ZELIO-TIME™ Timers - RE7

Timing Functions

Timing Functions

Operating Diagram	Operating Principle
On-Delay Timer	
<p>Supply Voltage Output Contact</p> <p>SPDT (C/O)</p>	<p>Timing starts when the timer is energized. When the set time delay (t_a) has elapsed, the output contact closes. When the timer is de-energized, the output contact returns to its initial position. The output contact does not close if the duration of the control instruction is less than the set time delay. Timing can also be started by opening of a external contact (models with remote control).</p>
Off-Delay Timer	
<p>Supply Voltage Output Contact</p> <p>SPDT (C/O)</p>	<p>Energization of the timer or closing of the control contact (models with external control) causes the output contact to close instantaneously. Timing starts when the timer is de-energized or when the control contact opens. When the set time delay (t_r) has elapsed, the output contact returns to its initial position. If the energization time or closing time of the control contact is less than the minimum time specified, the timing period does not start.</p>
On and Off-Delay Timer	
<p>Supply Voltage Output Contact</p> <p>SPDT (C/O)</p>	<p>This function is a combination of the On and Off delay functions. The timing cycle must be controlled by an external contact.</p> <p>Symmetrical The On and Off delays are equal.</p> <p>Asymmetrical The On and Off delays are adjusted by 2 different potentiometers.</p>
Interval Timer (Pulse On Energization)	
<p>Supply Voltage Output Contact</p> <p>SPDT (C/O)</p>	<p>Energization of the timer causes the output contact to close instantaneously and start the timing period. The output contact returns to its initial position when the set time delay (t) has elapsed or if the supply is cut off before the end of the timing period.</p>
Timer with Pulse On De-Energization or On Opening of a External Control Contact	
<p>Supply Voltage Output Contact</p> <p>SPDT (C/O)</p>	<p>De-energization of the timer or opening of the external control contact (depending on model) causes the output contact to close instantaneously and start the timing period. When the set time delay (t) has elapsed, the contact returns to its initial position.</p>
Repeat Cycle Timer (Flashing Timer)	
<p>Supply Voltage Output Contact</p> <p>SPDT (C/O)</p>	<p>Energization of the timer starts the flashing period and causes the output timer to start the flashing cycle. When the timer is de-energized, the contact returns to its initial position.</p> <p>Symmetrical Flashing Timer The timer flashes with a symmetrical On/Off pattern.</p> <p>Asymmetrical Flashing Timer The On and Off flashing timers are adjusted by 2 different potentiometers.</p>
Timers for Star-Delta Starters	
<p>Supply Voltage Output Contacts</p> <p>SPDT (C/O)</p>	<p>Energization of the timer causes the star contactor to close instantaneously and starts the timing period. When the set time delay (t) has elapsed, the star contactor returns to its initial position and the delta contactor closes, after a breaking time sufficient for the changeover.</p>

Additional Functions

-  **External Control of Starting:** Opening of an external contact connected to the timer starts the timing period. Closing of this contact resets the timer.
-  **Partial External Control of Timing:** Closing of an external contact connected to the timer allows the timing period to be interrupted. The time elapsed is memorized. Timing restarts as soon as the contact opens. This type of control enables the totalizing function to be performed.
-  **External Adjustment of the Time Delay:** One or more external potentiometers can be used for remote adjustment of the timing period or periods.

	Output ▲	Multifunction Timer	See Page
	Solid State	RE9TA	32
	1 C/O	RE7TL OR RE8TA	8 or 24
	2 C/O	RE7TP	8
  	1 C/O	RE7TM	8
	Solid State	RE9RA	32
	1 C/O	RE7RB11 or RE8RB	12 or 24
	2 C/O	RE7RL	12
	2 C/O	RE7RB13	12
	1 C/O	RE8RA	24
  	1 C/O	RE7RA and RE7RM	12
	2 C/O	RE7MA13	10
  	1 C/O	RE7MA11	10
  	1 C/O	RE7MV	10
	1 C/O	RE7PE or RE8PE	14 or 26
	2 C/O	RE7PP	14
	1 C/O	RE8PT	26
	2 C/O	RE7PD	14
  	1 C/O	RE7PM	14
	2 C/O	RE8PD	26
	1 C/O	RE7CL or RE8CL	16 or 24
	2 C/O	RE7CP	16
 	1 C/O	RE7CV	16
	1 C/O	RE8YG	26
	2 C/O	RE7YA and RE7YR	18
	1 N/C + N/O	RE8YA	26
	Solid State	RE9MS	33
  	1 C/O	RE7ML	6
  	2 C/O	RE7MY13MW	6
 	2 C/O	RE7MY13BU	6


■ Please consult your Regional Sales Office.

▲ 1C/O = SPDT =  2 C/O = DPDT = 

ZELIO-TIME™ Timers - RE7


Multi-function Timers - Selection

Adjustable Time Delay from 0.05 s to 300 h in 10 Ranges (see setting procedure on the next page).




t: Adjustable Time Delay
t = t1 + t2 + t3
ta: Adjustable On-Delay
ts: Partial Stop Time
t3: Switching Time = 50 ms


On-Delay Timer RE7ML, MY




Interval Timer with Start on Energization RE7ML, MY




Repeat Cycle Timer with Start during the ON Period RE7ML, MY




Repeat Cycle Timer with Start during the OFF Period RE7ML, MY




On-Delay Timer with start on opening of external control contact. RE7ML, MY




Interval Timer with Start on Opening of the External Control Contact RE7ML, MY



Timer for Star-Delta Starters with: Double On-Delay Timing RE7MY




Changeover contact to star connection RE7MY



External control for start of time delay (example on On-delay function) RE7ML, MY



External control for partial stop of time delay (example on pulse on energization relay) RE7ML, MY



6 Function Timer

Function (see diagrams above)

Supply Voltages **Relay Output** **Catalog Number** **Weight lb (kg)**

On-Delay Timer
 Off-Delay Timer
 Interval Timers
 -start on energization
 -start on opening of remote control contact
 Repeat Cycle Timer with start during the OFF period.
 Repeat Cycle Timer with start during the ON period
 External control possible for:
 -start of time delay
 -partial stop of time delay
 -adjustment of time delay ▲

24 Vdc or Vac
 42-48 Vdc or Vac
 110-240 Vac

1 C/O
 SPDT

RE7ML11BU 0.33 lb (0.150 kg)

8 Function Timer

Same as 6 Function Timer ♦ plus
 Timer for star-delta starting
 -with double On-Delay timing
 -with changeover contact to star connection

24 Vdc or Vac
 110-240 Vac

2 C/O
 DPDT

24-240 Vdc or Vac

2 C/O
 DPDT

RE7MY13BU 0.33 lb (0.150 kg)


RE7MY13MW 0.33 lb (0.150 kg)

- For use on other functions, please see the diagrams relating to the single function products.
- ▲ By external potentiometer, to be ordered separately (see page 3 for specifications). If external potentiometer is used, the internal potentiometer is automatically disconnected.
- ♦ Except control of partial stop of time delay for RE7MY13BU.




RE7MY


RE7ML11BU



RE7MY13BU




RE7MY13MW




Recommended Wiring Diagrams


Start on Energization



Start by External Control




External Control of Partial Stop




- (1) 110-240 Vac: RE7ML11BU or RE7MY13BU, 24-240 Vdc or Vac: RE7MY13MW.
 (2) 42-48 Vac or Vdc: RE7ML11BU.
 (3) 24 Vac or Vdc: RE7ML11BU or RE7MY13BU.

Potentiometer Wiring



Wiring Precautions



⚠ No galvanic insulation between supply terminals A1, A2, B1, B2 and control inputs X1, Y1, Z1, Z2.

SETTING PROCEDURE

- Potentiometer for fine adjustment of the time delay, graduated in % of range max. setting **2**.
- 10-position timing range selector:

0.05-1 s	0.5-10 s	5-100 s	1.5-30 min	1.5-30 h
0.15-3 s	1.5-30 s	15-300 s	1-300 min	15-300 h
- Switch for converting second time delay relay to instantaneous mode (depending on model).
- LEDs, depending on the model:
 - Green LED: flashes during the time delay period (except for the first 2 timing ranges), permanently on outside the time delay period.
 - Yellow LED 1: on when 1st relay is energized.
 - Yellow LED 2: on when 2nd relay is energized.



Adjustment of the Time Delay

- Select the timing range immediately greater than the time required, using selector switch **2**.
- Example: required time 12 s; range selected 30 s.
- Using potentiometer **1** display the required timing value as a % of value **2**.

$$\text{Percentage of setpoint} = \frac{\text{Required} \times 100}{\text{Trange}}$$


$$\text{Required} = 12 \text{ Sec.} \quad \frac{12 \times 100}{30} = 40 \%$$

$$\text{Trange} = 30 \text{ Sec.}$$



ZELIO-TIME™ Timers - RE7


On-Delay Timers - Selection




t: Adjustable On-Delay
 $t = t_1 + t_2 + t_3$

Timing Adjustable from 0.05 s to 300 h in 10 Ranges (see setting procedure on the next page).


On-Delay Timer Start on Energization **RE7TL, TM, TP**



External Control for Start of Time Delay **RE7TM**





External Control for Partial Stop of Time Delay (for totalizing function) **RE7TM**



Conversion of Second Contact to Instantaneous Mode by Means of Switch R2 ▲

RE7TP13BU




RE7T

Functions (see diagrams above)	Supply Voltages	Relay Output	Catalog Number	Weight lb (kg)
On-Delay Timer	24 Vdc or Vac 110-240 Vac	1 C/O SPDT	RE7TL11BU	0.33 lb (0.150 kg)
On-Delay Timer External control possible for: -start of time delay -partial stop of time delay -adjustment of time delay ■	24 Vdc or Vac 42-48 Vdc or Vac 110-240 Vac	1 C/O SPDT	RE7TM11BU	0.33 lb (0.150 kg)
On-Delay Timer ▲ Remote control possible for: -adjustment of time delay ■	24 Vdc or Vac 42-48 Vdc or Vac 110-240 Vac	2 C/O ▲ DPDT	RE7TP13BU ▲	0.33 lb (0.150 kg)


- By external potentiometer, to be ordered separately (see page 3 for specifications). If external potentiometer is used, the internal potentiometer is automatically disconnected.
- ▲ A switch on the front face of the timer allows the second contact to be used in instantaneous mode.

ZELIO-TIME™ Timers - RE7 On-Delay Timers - Wiring


RE7TL11BU



RE7TP13BU




RE7TM11BU




Recommended Wiring Diagrams

Start on Energization




- (1) 110-240 Vac.
- (2) 42-48 Vac or Vdc.
- (3) 24 Vac or Vdc.


Start by External Control




External Control Of Partial Stop



Potentiometer Wiring




Wiring Precautions



⚠ No galvanic insulation between supply terminals A1, A2, B1, B2 and control inputs X1, Y1, Z1, Z2.


SETTING PROCEDURE



1. Potentiometer for fine adjustment of the time delay, graduated in % of range max. Setting 2.
2. 10-position timing range selector:

0.05-1 s	0.5-10 s	5-100 s	1.5-30 min	1.5-30 h
0.15-3 s	1.5-30 s	15-300 s	1-300 min	15-300 h
3. Switch for converting second time delay relay to instantaneous mode (for RE7TP13BU).
4. LEDs, depending on the model:
 - Green LED U/T: flashes during time delay period, permanently on outside the time delay period.
 - Yellow LED R1: on when 1st relay is energized.
 - Yellow LED R2: on when 2nd relay is energized.

Adjustment of the Time Delay



- Select the timing range immediately greater than the time required, using selector switch 2.
- Example: Required time 12 s; range selected 30 s.
- Using potentiometer 1 display the required timing value as a % of value 2.

$$\text{Percentage of setpoint} = \frac{\text{Required} \times 100}{\text{Trange}}$$

$$\text{Required} = 12 \text{ Sec.} \quad \frac{12 \times 100}{30} = 40 \%$$


$$\text{Trange} = 30 \text{ Sec.}$$

ZELIO-TIME™ Timers - RE7


On-Delay and Off-Delay Timers - Selection

-  De-energized
 -  Energized
 -  Open
 -  Closed
- ta: Adjustable On-Delay**
tr = Adjustable Off-Delay
 $ta = t1 + t2$
 $tr = t3 + t4$
ts: Partial Stop Time

Time Delay Adjustable from 0.05 s to 300 h in 10 Ranges (see setting procedure on the next page).

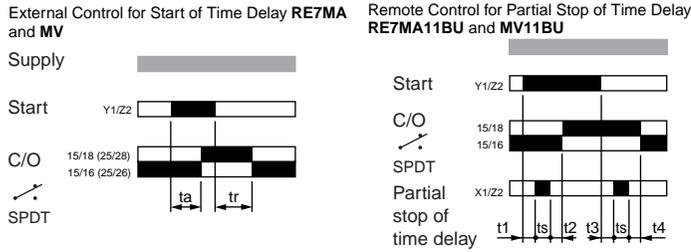

Conversion of Second Timing Relay to Instantaneous Mode by Means of Switch R2 ▲

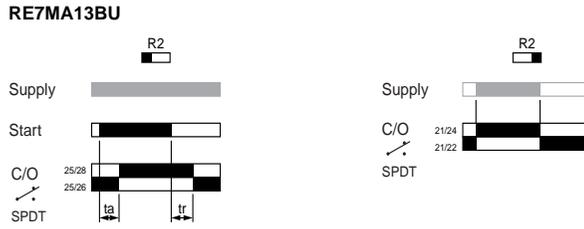


RE7M

Functions (see diagrams above)	Supply Voltages	Relay Output	Catalog Number	Weight lb (kg)
Symmetrical Timers: On and Off delay times are equal.				
On-Delay and Off-Delay Timer External control possible for: -partial stop of time delay -adjustment of time delay ■ Start control via external contact only	24 Vdc or Vac 42-48 Vdc or Vac 110-240 Vac	1 C/O  SPDT	RE7MA11BU	0.33 lb (0.150 kg)
On-Delay and Off-Delay Timer ▲ Start control via external contact only	24 Vdc or Vac 42-48 Vdc or Vac 110-240 Vac	2 C/O ▲  DPDT	RE7MA13BU	0.33 lb (0.150 kg)
Asymmetrical Timers: On and Off delay times are adjusted separately.				
On-Delay and Off-Delay Timer External control possible for: -partial stop of time delay -adjustment of time delay ■ Start control via external contact only	24 Vdc or Vac 42-48 Vdc or Vac 110-240 Vac	1 C/O  SPDT	RE7MV11BU	0.33 lb (0.150 kg)


- By external potentiometer, to be ordered separately (see page 3 for specifications). If external potentiometer is used, the internal potentiometer is automatically disconnected.
- ▲ A switch on the front face of the timer allows the second contact to be used in instantaneous mode.

ZELIO-TIME™ Timers - RE7 On-Delay and Off-Delay Timers - Wiring


RE7MA13



RE7MA11BU




RE7MV11BU




Recommended Wiring Diagrams (for dimensions, see page 20)

Start by External Control



(1) 110-240 Vac.

External Control of Partial Stop




(2) 42-48 Vac or Vdc.

(3) 24 Vac or Vdc.


Potentiometer Wiring for Symmetrical Timer

RE7MA11BU




Potentiometer Wiring for Asymmetrical Timer

RE7MV11BU




Wiring Precautions




⚠ No galvanic insulation between supply terminals A1, A2, B1, B2 and control inputs X1, Y1, Z1, Z2.

(4) Off-Delay adjustment (contact 15/16 closed).

(5) On-Delay adjustment (contact 15/18 closed).



Symmetrical Timing Relay



Asymmetrical Timing Relay

SETTING PROCEDURE

- Potentiometer for fine adjustment of the time delay, graduated in % of range max. setting 2.
- 10-position timing range selector:

0.05-1 s	0.5-10 s	5-100 s	1.5-30 min	1.5-30 h
0.15-3 s	1.5-30 s	15-300 s	1-300 min	15-300 h

A = Adjustable On-Delay (ta).

B = Adjustable Off-Delay (tr).

- Switch for converting second time delay relay to instantaneous mode (RE7MA13BU).
- LEDs, depending on the model:

- Green LED: flashes during the time delay period, permanently on outside the time delay period.
- Yellow LED 1: on when 1st relay is energized.
- Yellow LED 2: on when 2nd relay is energized.


Adjustment of the Time Delay

- Select the timing range immediately greater than the time required, using selector switch 2.
- Example: required time 12 s; range selected 30 s.
- Using potentiometer 1 display the required timing value as a % of value 2.

$$\text{Percentage of setpoint} = \frac{\text{Required} \times 100}{\text{Trange}}$$


$$\text{Required} = 12 \text{ Sec.} \quad \frac{12 \times 100}{30} = 40 \%$$

$$\text{Trange} = 30 \text{ Sec.}$$



ZELIO-TIME™ Timers - RE7 Off-Delay Timers - Selection

tr: Adjustable Off-Delay
 $tr = t1 + t2$
ts: Partial Stop Time

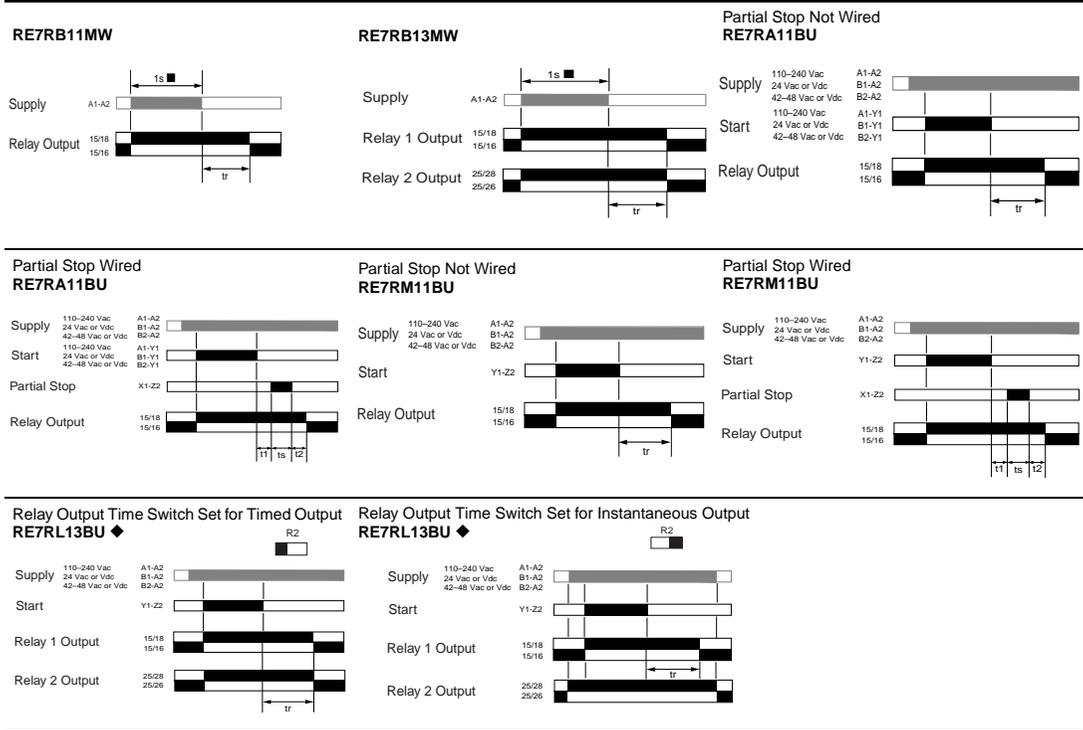


RE7R

Functions	Supply Voltages	Relay Output	Catalog Number	Weight lb (kg)
On De-energization, Adjustable from 0.05 s to 10 min, in 7 Ranges (see setting procedure on next page).				
Off-Delay Timer (Times without power.)	24-240 Vdc or Vac	1 C/O	RE7RB11MW ■	0.33 lb (0.150 kg)
		SPDT		
Off-Delay Timer (Times without power.) Remote control possible for: -adjustment of time delay ▲ (Terminals Z1 and Z2)	24-240 Vdc or Vac	2 C/O	RE7RB13MW ■	0.33 lb (0.150 kg)
		DPDT		
On Opening of External Control Contact, Adjustable from 0.05 s to 300 h, in 10 Ranges (see setting procedure on next page).				
Off-Delay Timer External control possible for: -partial stop of time delay (Terminals X1 and Z2) -adjustment of time delay ▲ (Terminals Z1 and Z2)	24 Vdc or Vac 42-48 Vdc or Vac 110-240 Vac	1 C/O	RE7RA11BU	0.33 lb (0.150 kg)
		SPDT		
On opening of Low Level External Control Contact, Adjustable from 0.05 s to 300 h, in 10 Ranges (see setting procedure on next page).				
Off-Delay Timer External control possible for: -partial stop of time delay (Terminals X1 and Z2) -adjustment of time delay ▲ (Terminals Z1 and Z2)	24 Vdc or Vac 42-48 Vdc or Vac 110-240 Vac	1 C/O	RE7RM11BU	0.33 lb (0.150 kg)
		SPDT		
Off-Delay Timer ◆	24 Vdc or Vac 42-48 Vdc or Vac 110-240 Vac	2 C/O ◆	RE7RL13BU	0.33 lb (0.150 kg)
		DPDT		


- If the device has been stored, de-energized, for more than a month, it must be energized for about 15 seconds to activate it. Subsequently, a time of > 1 s is enough to activate the time delay.
⚠ If this time is not complied with, the relay will remain energized indefinitely.
- ▲ By external potentiometer, to be ordered separately (see page 3 for specifications). If external potentiometer is used, the internal potentiometer is automatically disconnected.
- ◆ A switch on the front face of the timer allows the second contact to be used in instantaneous mode.

ZELIO-TIME™ Timers - RE7 Off-Delay Timers - Wiring


RE7RL13BU




RE7RB11MW



RE7RB13MW




RE7RM11BU & RE7RA11BU



Recommended Wiring Diagrams


Start on Energization

RE7RB




Start by Low Level External Control


RE7RM and RL



Remote Control of Partial Stop






Potentiometer Wiring




Start by External Control

RE7RA



Wiring Precautions


RE7RM and RL



⚠ No galvanic insulation between supply terminals A1, A2, B1, B2 and control inputs X1, Y1, Z1, Z2.

- (1) 110-240 Vac.
- (2) 42-48 Vac or Vdc.
- (3) 24 Vac or Vdc.
- (4) 24-240 Vdc or Vac.

SETTING PROCEDURE



- Potentiometer for fine adjustment of the time delay, graduated in % of range max. Setting 2.
- Timing range selector:

10-position timing range selector (RE7RA, RM, RL):

0.05-1 s	0.5-10 s	5-100 s	1.5-30 min	1.5-30 h
0.15-3 s	1.5-30 s	15-300 s	1-300 min	15-300 h

7-position timing range selector (RE7RB):

0.05-1 s	0.5-10 s	5-100 s	1.5-10 min
0.15-3 s	1.5-30 s	15-300 s	

- Switch for converting second time delay relay to instantaneous mode (for RE7RL13BU).
- LEDs, depending on the model:

- Green LED U/T: flashes during the time delay period, permanently on outside the time delay period.
- Yellow LED R1: on when 1st relay is energized.
- Yellow LED R2: on when 2nd relay is energized.
- RE7RB●●MW: The green LED does not flash during the time delay period and there's no yellow LED's.


Adjustment of the Time Delay

- Select the timing range immediately greater than the time required, using selector switch 2.
- Example: Required time 12 s; range selected 30 s.
- Using potentiometer 1 display the required timing value as a % of value 2.

$$\text{Percentage of setpoint} = \frac{\text{Required} \times 100}{\text{Trange}}$$

$$\text{Required} = 12 \text{ Sec.} \quad \frac{12 \times 100}{30} = 40 \%$$

$$\text{Trange} = 30 \text{ Sec.}$$




ZELIO-TIME™ Timers - RE7

Interval Timers - Selection


t: pulse time
t = t1 + t2 + t3
ts: Partial Stop Time

Time Delay Adjustable from 0.05 s to 300 h in 10 Ranges (see setting procedure on the next page).

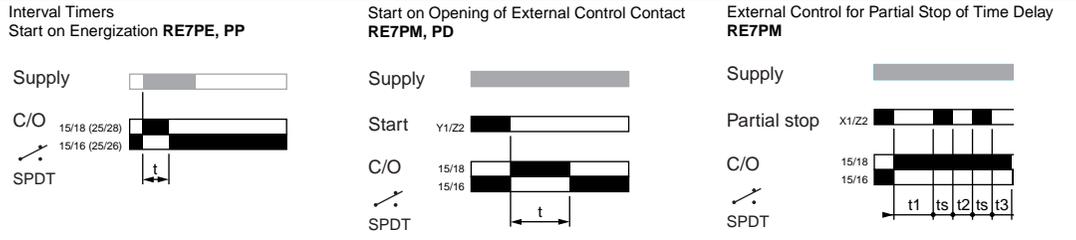


Conversion of Second Timing Relay to Instantaneous Mode by Means of Switch R2

RE7PP

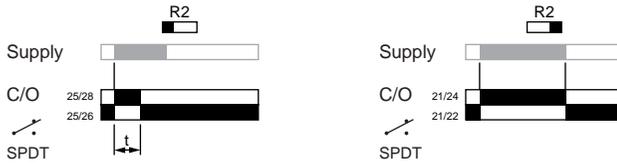

RE7PD

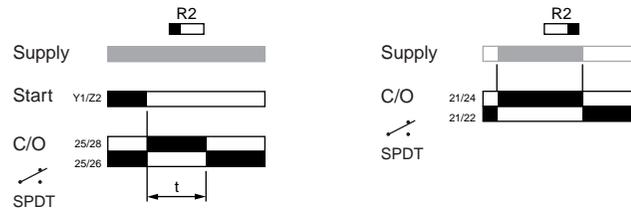


RE7P

Functions	Supply Voltages	Relay Output	Catalog Number	Weight lb (kg)
Start on Energization				
Interval Timer	24 Vdc or Vac 110-240 Vac	1 C/O SPDT	RE7PE11BU	0.33 lb (0.150 kg)
Interval Timer ■ External control possible for: -adjustment of time delay ▲	24 Vdc or Vac 42-48 Vdc or Vac 110-240 Vac	2 C/O ■ DPDT	RE7PP13BU	0.33 lb (0.150 kg)
Start on Opening of External Control Contact				
Interval Timer External control possible for: -partial stop of time delay -adjustment of time delay ▲	24 Vdc or Vac 42-48 Vdc or Vac 110-240 Vac	1 C/O SPDT	RE7PM11BU	0.33 lb (0.150 kg)
Interval Timer ■	24 Vdc or Vac 42-48 Vdc or Vac 110-240 Vac	2 C/O ■ DPDT	RE7PD13BU	0.33 lb (0.150 kg)


- A switch on the front face of the timer allows the second contact to be used in instantaneous mode.
- ▲ By external potentiometer, to be ordered separately (see page 3 for specifications). If external potentiometer is used, the internal potentiometer is automatically disconnected.

ZELIO-TIME™ Timers - RE7 Interval Timers - Wiring


RE7PE11BU




RE7PP13BU



RE7PD13BU




RE7PM11BU




Recommended Wiring Diagrams (for dimensions see page 20)

Start on Energization
RE7PE, PP




- (1) 110-240 Vac.
- (2) 42-48 Vac or Vdc.

Start by External Control
RE7PM, PD




- (3) 24 Vac or Vdc.
- (4) 42-48 Vdc or Vac: RE7PP.


External Control of Partial Stop



Potentiometer Wiring




Wiring Precautions



⚠ No galvanic insulation between supply terminals A1, A2, B1, B2 and control inputs X1, Y1, Z1, Z2.

SETTING PROCEDURE



1. Potentiometer for fine adjustment of the time delay, graduated in % of range max. setting **2**.
2. 10-position timing range selector:

0.05-1 s	0.5-10 s	5-100 s	1.5-30 min	1.5-30 h
0.15-3 s	1.5-30 s	15-300 s	1-300 min	15-300 h
3. Switch for converting second time delay relay to instantaneous mode (depending on model).
4. LEDs, depending on the model:


- Green LED: flashes during the time delay period (except for the first 2 timing ranges), permanently on outside the time delay period.
- Yellow LED 1: on when 1st relay is energized.
- Yellow LED 2: on when 2nd relay is energized.

Adjustment of the Time Delay

- Select the timing range immediately greater than the time required, using selector switch **2**.
- Example: required time 12 s; range selected 30 s.
- Using potentiometer **1** display the required timing value as a % of value **2**.

$$\text{Percentage of setpoint} = \frac{\text{Required} \times 100}{\text{Range}}$$

$$\begin{aligned} \text{Required} &= 12 \text{ Sec.} & \frac{12 \times 100}{30} &= 40 \% \\ \text{Range} &= 30 \text{ Sec.} \end{aligned}$$




ZELIO-TIME™ Timers - RE7

Repeat Cycle Timers - Selection

De-energized
 Energized
 Open
 Closed

t, t1 and t2: Adjustable Time Delays
ts: Partial Stop Time
t: flashing time
ta: Adjustable On-Delay
tr: Adjustable Off-Delay
 $ta = t1 + t2$
 $tr = t3 + t4$

Time Delay Adjustable from 0.05 s to 300 h in 10 Ranges (see setting procedure on the next page).

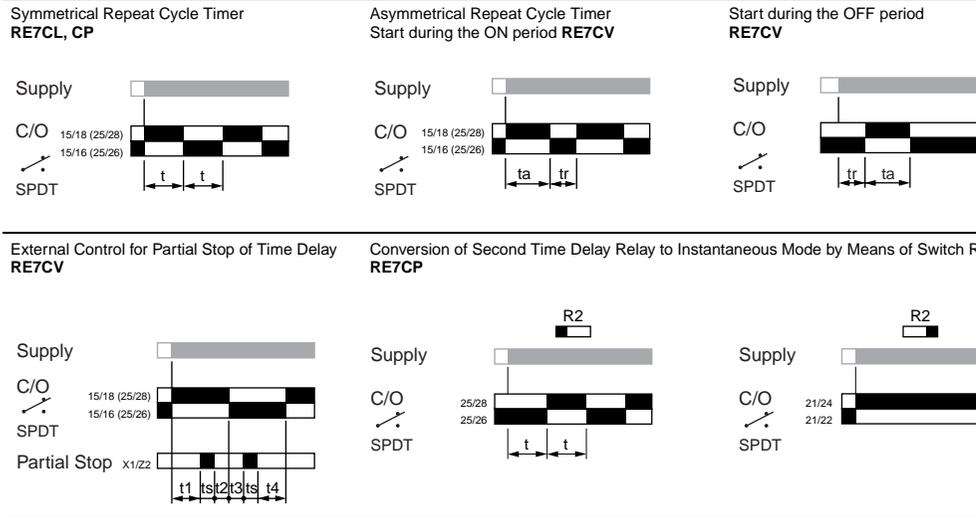


RE7C


Functions (see diagrams above)	Supply Voltages	Relay Output	Catalog Number	Weight lb (kg)
Symmetrical Relays with Start during OFF Period				
Repeat Cycle Timer	24 Vdc or Vac 110-240 Vac	1 C/O SPDT	RE7CL11BU	0.33 lb (0.150 kg)
Repeat Cycle Timer External control possible for: -adjustment of time delay	24 Vdc or Vac 42-48 Vdc or Vac 110-240 Vac	2 C/O DPDT	RE7CP13BU	0.33 lb (0.150 kg)
Asymmetrical, with Separate Adjustment of On-Delay and Off-Delay				
Repeat Cycle Timer External control possible for: -start period -adjustment of time delays -partial stop	24 Vdc or Vac 42-48 Vdc or Vac 110-240 Vac	1 C/O SPDT	RE7CV11BU	0.33 lb (0.150 kg)

- A switch on the front face of the timer allows the second contact to be used in instantaneous mode.
- By external potentiometer, to be ordered separately (see page 3 for specifications). If external potentiometer is used, the internal potentiometer is automatically disconnected.


RE7CL11BU



RE7CP13BU




RE7CV11BU



Recommended Wiring Diagrams


Start on Energization



- (1) 110-240 Vac.
- (2) 42-48 Vac or Vdc.

Start Period Selection


RE7CV



- (3) 24 Vac or Vdc.
- (4) 42-48 Vdc or Vac: RE7CP13BU

External Control of Partial Stop


RE7CP



- (5) Start during ON period: X2-Z2 connected. Start during OFF period: X2-Z2 connected.

Potentiometer Wiring


RE7CV





- ⚠ No galvanic insulation between supply terminals A1, A2, B1, B2 and control inputs X1, Y1, Z1, Z2.
- (6) Off-Delay adjustment (contact 15/16 closed).
- (7) On-Delay adjustment (contact 15/18 closed).

Potentiometer Wiring


RE7CP



Wiring Precautions



Symmetrical Timing Relay



Asymmetrical Timing Relay

SETTING PROCEDURE

1. Potentiometer for fine adjustment of the time delay in % of range max. setting 2.
2. 10-position timing range selector:

0.05-1 s	0.5-10 s	5-100 s	1.5-30 min	1.5-30 h
0.15-3 s	1.5-30 s	15-300 s	1-300 min	15-300 h

A = Adjustable On-Delay (ta).
B = Adjustable Off-Delay (tr).
3. Switch for converting second time delay relay to instantaneous mode (RE7CP13BU).
4. LEDs, depending on the model:


- Green LED: flashes during the time delay period, permanently on outside the time delay period.
- Yellow LED 1: on when 1st relay is energized.
- Yellow LED 2: on when 2nd relay is energized.

Adjustment of the Time Delay

- Select the timing range immediately greater than the time required, using selector switch 2.
- Example: required time 12 s; range selected 30 s.
- Using potentiometer 1 display the required timing value as a % of value 2.

$$\text{Percentage of setpoint} = \frac{\text{Required} \times 100}{\text{Range}}$$

$$\text{Required} = 12 \text{ Sec.} \quad \frac{12 \times 100}{30} = 40 \%$$



ZELIO-TIME™ Timers - RE7



Star-Delta Timer - Selection

Time Delay Adjustable from 0.05 s to 300 h in 10 Ranges (see setting procedure on the next page).

Timer for "Star-Delta" Starters
with Double On-Delay ■
RE7YA

With Interval Contact for Star Operation ■
RE7YR

t: Adjustable Time Delay (Star)
t3: Switching Time = 50 ms




RE7Y

Functions (see diagrams above)	Supply Voltages	Relay Output	Catalog Number	Weight lb (kg)
With Double On-Delay	24 Vdc or Vac 42-48 Vdc or Vac 110-240 Vac	2 C/O DPDT	RE7YA12BU	0.33 lb (0.150 kg)
With Interval Contacts for Star Operation	24 Vdc or Vac 42-48 Vdc or Vac 110-240 Vac	2 C/O with common point DPDT	RE7YR12BU	0.33 lb (0.150 kg)


■ Adjustable time delay for "star" operation and fixed (50 ms) for the changeover from "star" to delta" operation in order to ensure sufficient breaking time.

ZELIO-TIME™ Timers - RE7 Star-Delta Timer - Wiring


Power Wiring
RE7YA12BU

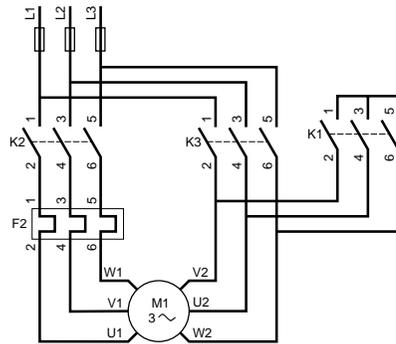


Control Wiring
"Star-Delta" function with double On-Delay timing

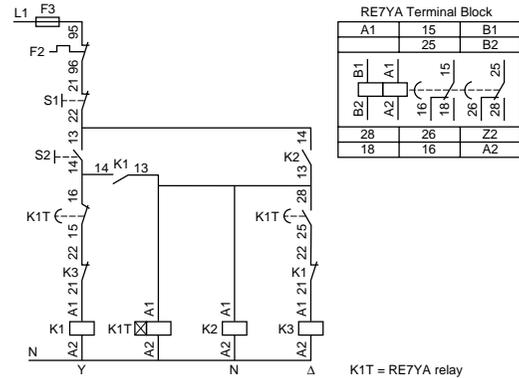

Power Wiring
RE7YR12BU

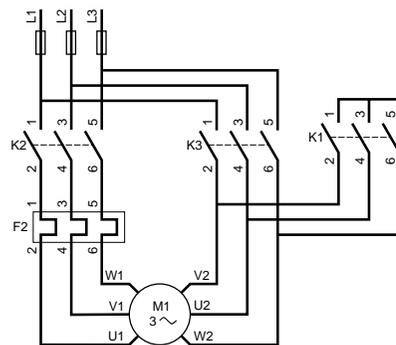

Control Wiring "Star-Delta" function with interval contact for "Star" operation

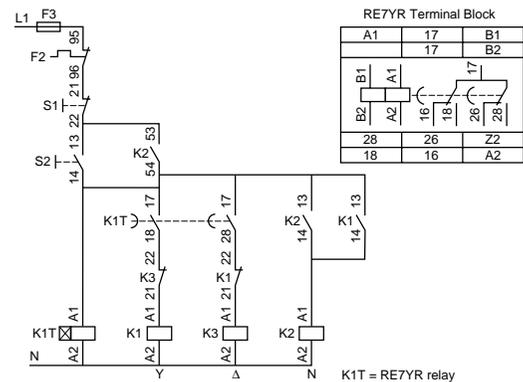

⚠ No galvanic insulation between supply terminals A1, A2, B1, B2 and control input Z2. This terminal must therefore never be used (factory setting).

SETTING PROCEDURE

- Potentiometer for fine adjustment of the time delay, graduated in % of range max. setting 2.
- 10-position timing range selector:

0.05-1 s	0.5-10 s	5-100 s	1.5-30 min	1.5-30 h
0.15-3 s	1.5-30 s	15-300 s	1-300 min	15-300 h
- LEDs, depending on the model:
 - Green LED: flashes during the time delay period (except for the first 2 timing ranges), permanently on outside the time delay period.
 - Yellow LED 1: on when 1st relay is energized.
 - Yellow LED 2: on when 2nd relay is energized.



Adjustment of the Time Delay

- Select the timing range immediately greater than the time required, using selector switch 2.
- Example: required time 12 s; range selected 30 s.
- Using potentiometer 1 display the required timing value as a % of value 2.

$$\text{Percentage of setpoint} = \frac{\text{Required} \times 100}{\text{Trange}}$$


$$\text{Required} = 12 \text{ Sec.} \quad \frac{12 \times 100}{30} = 40 \%$$

$$\text{Trange} = 30 \text{ Sec.}$$




ZELIO-TIME™ Timers - RE7


Dimensions

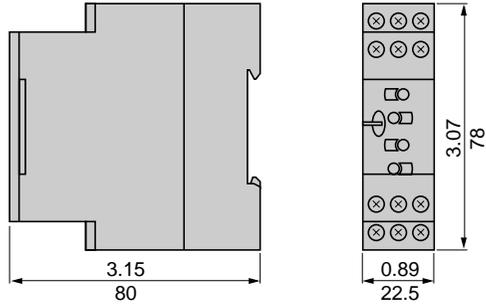

Rail Mounting

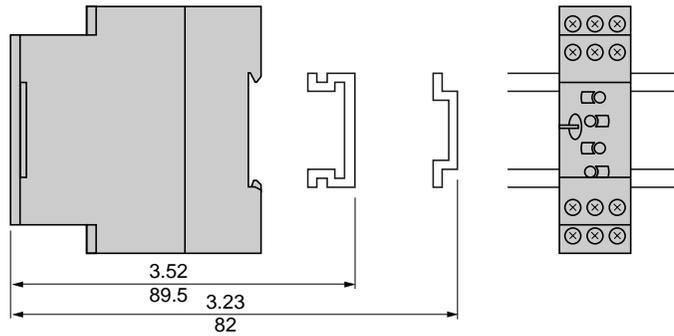


Direct Panel Mounting

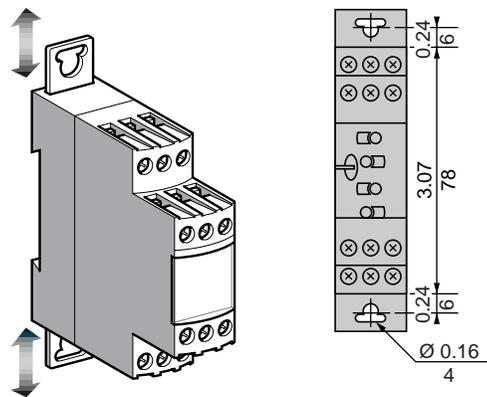


Dual Dimensions = $\frac{\text{in}}{\text{mm}}$

Control of Several Timers with a Single External Control Contact

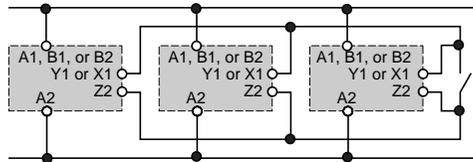



Connection of Telemecanique 3-wire NPN or PNP sensor

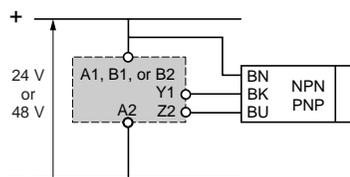

It is advisable to follow the recommended wiring diagrams detailed above and on previous pages. However, the connections below are possible if the restrictions given are taken into account.



Connection of an External Control Contact without using Terminal Z2:

- Possible on all RE7 timers with external control option except RE7RA11BU
- Vdc supply only



Connection of Telemecanique 3-wire NPN or PNP Sensor without using Terminal Z2:

- Only possible on timer RE7●●●●BU
- Vdc supply only

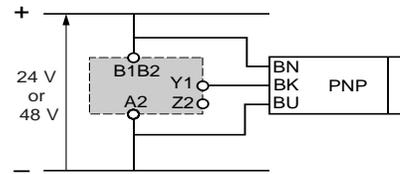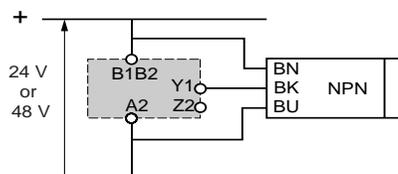

ZELIO-TIME™ Timers - RE8 Application Data



The RE8 range of timers are designed for simple and repetitive applications, providing basic functions.

Each relay has:

- A single timing range
- A SPDT output relay

These products have a transparent, hinged cover on their front face to prevent any accidental alteration of the settings. This cover can be sealed.

Environment

Conforming to Standards		IEC 61812-1, EN 61812-1
Product Approvals		 File E164353 CNN NKCR  File LR 89150 Guide 3211 07  GL
CE Marking		Zelio Time Timer conforms to European regulations relating to CE Marking
Ambient Air Temperature around the Device	Storage	-40 to 185 °F (-40 to + 85 °C)
	Operation	-4 to 140 °F (-20 to + 60 °C)
Permissible Relative Humidity Range	Conforming to IEC 60721-3-3	15-85 % Environmental Class 3K3
Vibration Resistance	Conforming to IEC 60068-2-6, 10 to 55 Hz	a = 0.35 ms
Shock Resistance	Conforming to IEC 60068-2-27	15 gn - 11 ms
Degree of Protection	Housing	IP 50
	Terminals	IP 20
Degree of Pollution	Conforming to IEC 60664-1	3
Overvoltage Category	Conforming to IEC 60664-1	III
Rated Insulation Voltage	Conforming to IEC	250 V
	Conforming to UL and CSA	300 V
Test Voltage for Insulation Tests	Dielectric test	UL and CSA 2200 V, IEC 2000 V
	Shock wave	4.8 kV
Voltage Limits	Power supply circuit	0.9-1.1 U _c
Frequency Limits	Power supply circuit	50/60 ± 5 % Hz
Disconnection Value	Power supply circuit	> 0.1 U _c
Mounting Position without Derating	In relation to normal vertical mounting plane	Any position
Connection Maximum C.S.A.	Stranded wire without cable end	2 # 14 AWG (2 x 2.5 mm ²)
	Stranded with cable end	2 # 16 AWG (2 x 1.5 mm ²)
Tightening Torque		4.5-9.9 lb-in (0.6-1.1 Nm)

Immunity to Electromagnetic Interference (EMC) (Application Class 2 Conforming to EN 61812-1)

Electrostatic Discharge	Conforming to IEC 61000-4-2	Level 3 (6 kV contact, 8 kV air)
Electromagnetic Fields	Conforming to IEC 61000-4-3	Level 3 (10 V/m)
Fast Transients	Conforming to IEC 61000-4-4	Level 3 (2 kV)
Shock Waves	Conforming to IEC 61000-4-5	Level 3 (2 kV)
Radiated and Conducted Emissions	CISPR11	Group 1 Class A
	CISPR22	Class A

Consumption

Consumption	RE8TA, RA, CL, PE, PU, PT	24 Vac	110 Vac	240 Vac	380 Vac	415 Vac	24 Vdc
		0.7 VA	1.8 VA	8.5 VA	—	—	0.5 W
	RE8YG, RB	0.9 VA	2.5 VA	13 VA	—	—	0.5 W
	RE8YA	0.9 VA	2.5 VA	13 VA	8 VA	9 VA	0.7 W

Time Delay Specifications


Setting Accuracy	As % of the full scale value	± 20 %
Repeat Accuracy		< 1 %
Influence of Voltage	In the voltage range, 0.9-1.1 Un	< 2.5 %
Influence of Temperature		< 0.2 % / °C
Immunity to Micro-Breaks		3 ms
Minimum Control Pulse		26 ms (except RE8YG: 60 ms)
Reset Time		50 ms

Output Circuit Specifications

Maximum Switching Voltage		250 Vac/Vdc		
Mechanical Durability ■	In millions of operating cycles	20 ■		
Current Limit I _{th}		8 A		
Rated Operational Limits at 70 °C		24 V	115 V	250 V
Conforming to IEC 60947-5-1/1991 and VDE 0660	AC-15	3 A	3 A	3 A
	DC-13	2 A	0.2 A	0.1 A
UL and CSA Current Ratings	Resistive Rating	5 A		
NEMA / UL B300	Inductive Rating	3600 VA Make Rating 360 VA Break Rating 5 A Carry		
Minimum Switching Capacity		12 V/10 mA ■		
Contact Material		Nickel Silver 90/10		


Curve 1 ■
AC Load

Electrical durability of contacts on resistive load in millions of operating cycles




Curve 2 ■

Reduction factor k for inductive loads (applies to values taken from the durability curve opposite)



DC Load ■
Load Limit Curve



A RE8RB●●BUTQ

1 L/R = 20 ms

2 L/R with load protection diode

3 Resistive load

Remote Control Input Specifications

Signal delivered by control input Y1 No galvanic insulation between this input and the power supply ⚠	No-load voltage	Supply voltage
	Switching current	< 10 mA
	Maximum distance	164 ft (50 m)
	Compatibility	2-wire sensors with leakage current < 1 mA

Example:


An LC1F185 contactor supplied with 115 V/50 Hz for a consumption of 55 VA or a current consumption equal to 0.1 A and $\cos \varphi = 0.3$.

For 0.1 A, Curve 1 indicates a durability of approximately 1.5 million operating cycles.

As the load is inductive, it is necessary to apply a reduction coefficient k to this number of cycles, as indicated by curve 2.

For $\cos \varphi = 0.3$: $k = 0.6$

The electrical durability therefore becomes:
 $1.5 \cdot 10^6$ operating cycles $\times 0.6 = 900,000$ operating cycles.




- The product life expressed above is based on average usage and normal operating conditions. Actual operating life will vary with conditions. The above statements are not intended to, nor shall they create any expressed or implied warranties as to product operation or life. For information on the listed warranty offered on this product, refer to the terms and conditions of sale found in the Digest.

ZELIO-TIME™ Timers - RE8


On-Delay Timers - Selection



RE8TA



On-Delay Timers Start on Energization **RE8TA**





Relay Output	Supply Voltages	Timing Range ■	Catalog Number	Standard Pack Quantity ◆	Weight lb (kg)
1 C/O SPDT	24 Vdc or Vac 110-240 Vac	0.1-3 s	RE8TA61BUTQ	10	0.24 lb (0.110 kg)
		0.1-10 s	RE8TA11BUTQ ▲	10	0.24 lb (0.110 kg)
		0.3-30 s	RE8TA31BUTQ ▲	10	0.24 lb (0.110 kg)
		3-300 s	RE8TA21BUTQ ▲	10	0.24 lb (0.110 kg)
		20 s-30 min	RE8TA41BUTQ	10	0.24 lb (0.110 kg)

Off-Delay Timers


Off-Delay Timer With Control Contact **RE8RA**

Self-Powered **RE8RB**



Relay Output	Supply Voltages	Timing Range ■	Catalog Number	Standard Pack Quantity ◆	Weight lb (kg)
Control Contact					
1 C/O SPDT	24 Vdc or Vac 110-240 Vac	0.1-10 s	RE8RA11BTQ ▲	10	0.24 lb (0.110 kg)
		0.3-30 s	RE8RA31BTQ	10	0.24 lb (0.110 kg)
		3-300s	RE8RA21BTQ ▲	10	0.24 lb (0.110 kg)
		0.1-10 s	RE8RA11FUTQ ▲	10	0.24 lb (0.110 kg)
		0.3-30 s	RE8RA31FUTQ	10	0.24 lb (0.110 kg)
		3-300 s	RE8RA21FUTQ ▲	10	0.24 lb (0.110 kg)
Self-Powered					
1 C/O SPDT	24 Vdc or Vac 110-240 Vac	0.05-0.5 s	RE8RB51BUTQ	10	0.24 lb (0.110 kg)
		0.1-10 s	RE8RB11BUTQ	10	0.24 lb (0.110 kg)
		0.3-30 s	RE8RB31BUTQ	10	0.24 lb (0.110 kg)


Repeat Cycle Timer Symmetrical **RE8CL**




Relay Output	Supply Voltages	Timing Range ■	Catalog Number	Standard Pack Quantity ◆	Weight lb (kg)
1 C/O SPDT	24 Vdc or Vac 110-240 Vac	0.1-10 s	RE8CL11BUTQ	10	0.24 lb (0.110 kg)

- For easier adjustment, it is preferable to set the time delay between the maximum value in the range and one tenth of this value. Example: RE8TA11BUTQ timing range 0.1-10 s, recommended use 1-10 s.
- ▲ Also available in pack of one; delete TQ from the end of the catalog number. Example: RE8TA11BU.
- ◆ Orders must specify standard pack quantity or multiples of that quantity.


RE8TA,CL



RE8RA




RE8RB




Recommended Wiring Diagrams

RE8TA, RB, CL



RE8RA



- (1) 110-240 Vac.
- (2) 24 Vdc or Vac.
- (3) 24 Vdc.
- (4) 24 Vac or 110-240 Vac.

SETTING PROCEDURE



1. Potentiometer for fine adjustment of the time delay, graduated in % of range max. setting **2**.
2. Marking of maximum time delay value.
3. LEDs, depending on the model:
 - Yellow LED: illuminates when the output relay is energized.
 - Yellow LED: illuminates when the RE8 is energized

Adjustment of the Time Delay

- The maximum value of the timing range is printed on the product, **2**.
- Example: RE8TA61BUTQ; maximum time delay: 3 s.
- Time required 2.4 s; using potentiometer **1** set the value of the time delay required as a % of value **2**:

$$\text{Percentage of setpoint} = \frac{\text{Required} \times 100}{\text{Trange}}$$


$$\begin{aligned} \text{Required} &= 2.4 \text{ Sec.} & \frac{2.4 \times 100}{3} &= 80 \% \\ \text{Trange} &= 3 \text{ Sec.} \end{aligned}$$




ZELIO-TIME™ Timers - RE8

Interval Timers - Selection

Interval Timers





RE8PE

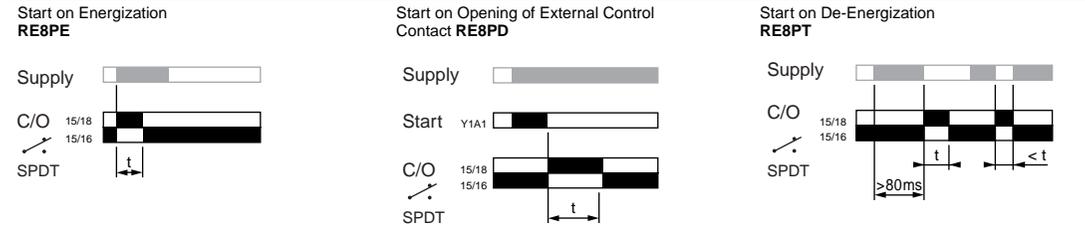

Relay Output	Supply Voltages	Timing Range ■	Catalog Number	Standard Pack Quantity ◆	Weight lb (kg)
On Energization					
1 C/O	24 Vdc or Vac 110-240 Vac	0.1-10 s	RE8PE11BUTQ	10	0.24 lb (0.110 kg)
		0.3-30 s	RE8PE31BUTQ	10	0.24 lb (0.110 kg)
SPDT		3-300 s	RE8PE21BUTQ	10	0.24 lb (0.110 kg)
By Control Contact					
1 C/O	24 Vdc or Vac	0.1-10 s	RE8PD11BTQ	10	0.24 lb (0.110 kg)
		0.3-30 s	RE8PD31BTQ	10	0.24 lb (0.110 kg)
SPDT		3-300s	RE8PD21BTQ	10	0.24 lb (0.110 kg)
1 C/O	110-240 Vac	0.1-10 s	RE8PD11FUTQ	10	0.24 lb (0.110 kg)
		0.3-30 s	RE8PD31FUTQ	10	0.24 lb (0.110 kg)
SPDT		3-300 s	RE8PD21FUTQ	10	0.24 lb (0.110 kg)
On De-Energization					
1 C/O	24 Vdc or Vac 110-240 Vac	0.05-1 s	RE8PT01BUTQ	10	0.05 lb (0.110 kg)
SPDT					

Timers for Star-Delta Starters

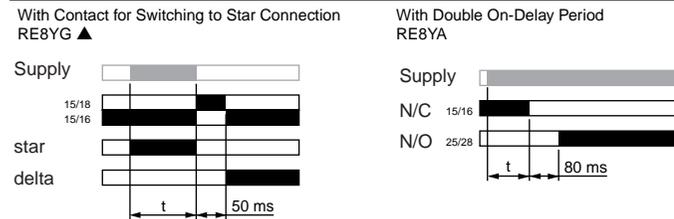


Relay Output	Supply Voltages	Timing Range ■	Catalog Number	Standard Pack Quantity ◆	Weight lb (kg)
1 C/O	24 Vdc or Vac 110-240 Vac	0.1-10 s	RE8YG11BUTQ	10	0.24 lb (0.110 kg)
		0.3-30 s	RE8YG31BUTQ	10	0.24 lb (0.110 kg)
SPDT		3-300 s	RE8YG21BUTQ	10	0.24 lb (0.110 kg)
1 N/C + 1 N/O	24 Vdc or Vac	0.3-30 s	RE8YA32BTQ	10	0.24 lb (0.110 kg)
	100-240 Vac	0.3-30 s	RE8YA32FUTQ	10	0.24 lb (0.110 kg)
	380-415 Vac	0.3-30 s	RE8YA32QTQ	10	0.24 lb (0.110 kg)

- For easier adjustment, it is preferable to set the time delay between the maximum value in the range and one tenth of this value. Example: RE8PE11BUTQ timing range 0.1-10 s, recommended use 1-10 s.
- ▲ Correct operation of the star-delta starter is only possible if the wiring diagram on page 27 is strictly followed.
- ◆ Orders must specify standard pack quantity or multiples of that quantity.


ZELIO-TIME™ Timers - RE8 Interval Timers - Wiring

WIRING


RE8TPE




RE8PD




RE8PT



RE8YA




RE8YG



Recommended Wiring Diagrams


Interval Timers

RE8PE, PT



- (1) 110-240 Vac.
- (2) 24 Vdc or Vac.


RE8PD




- (3) 24 Vdc.
- (4) 24 Vac or 110-240 Vac.

Timers for Star-Delta Starters

RE8YG, RE8YA




RE8YG

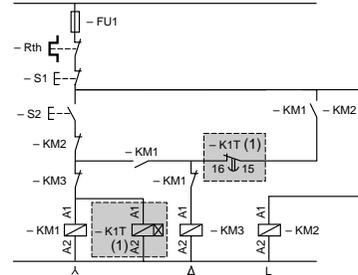

(1) K1T: RE8YG●1●●TQ

RE8YA



(1) K1T: RE8YA32●●TQ

NOTE: Correct operation of the Star-Delta Starter associated with the RE8YG is only possible if the wiring diagram is strictly followed.

SETTING PROCEDURE

1. Potentiometer for fine adjustment of the time delay, graduated in % of range max. setting **2**.
2. Marking of maximum time delay value.
3. LEDs, depending on the model:
 - Yellow LED: illuminates when the output relay is energized.
 - Yellow LED: illuminates when the RE8 is energized



Adjustment of the Time Delay

- The maximum value of the timing range is printed on the product, **2**.
- Example: RE8PE11BUTQ; maximum time delay: 10 s.
- Time required 2.4 s; using potentiometer **1** set the value of the time delay required as a % of value **2**:

$$\text{Percentage of setpoint} = \frac{\text{Required} \times 100}{\text{Trange}}$$


$$\text{Required} = 2.4 \text{ Sec.} \quad \frac{2.4 \times 100}{10} = 24 \%$$

Trange = 3 Sec.




ZELIO-TIME™ Timers - RE8


Dimensions

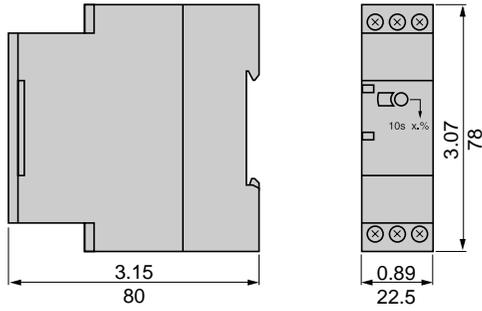

Rail Mounting

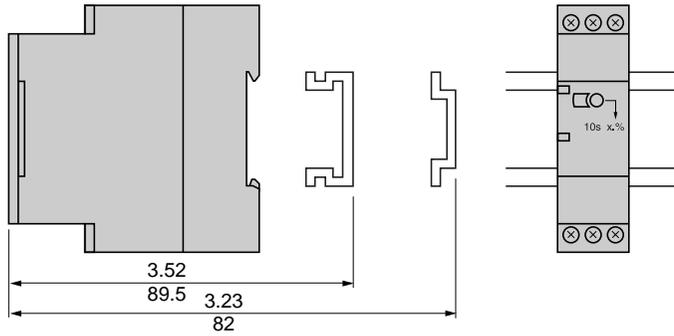


Direct Panel Mounting

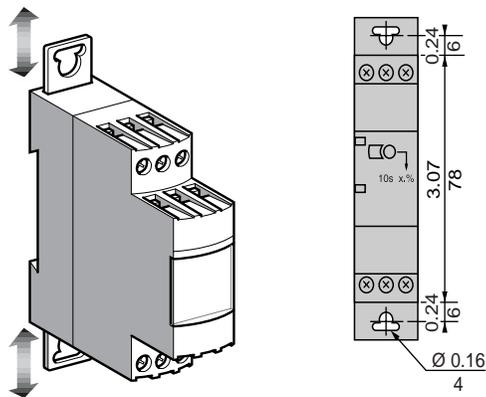


Dual Dimensions = $\frac{\text{in}}{\text{mm}}$

**Control of Several Timers with a Single External Control Contact
RE8RA, PD**

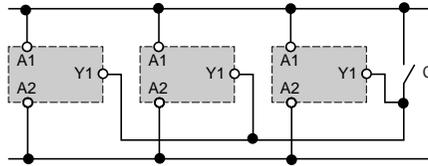

The external control contact C may be an electronic control device, for example a 2-wire sensor. In this case A1-A2 = 24 Vdc and the control device can only control up to a maximum of 4 timers.

Connection of 2-Wire VDC Sensor



Leakage current (open state) if < 1 mA.

ZELIO-TIME™ Timers - RE9

Application Data



The RE9 range of timers is designed for simple, repetitive applications with short and intensive cycles because their solid state output relays provides very high electrical durability.

Each product has a single timing range.

Each relay has a wide voltage range from 24 to 240 V.

The range has 9 catalog numbers with 3 model types:

- RE9TA: On-Delay
- RE9RA: Off-Delay
- RE9MS: Multifunction

These products have a transparent, hinged cover on their front face to avoid any accidental alteration of the setting. This cover can be sealed.

Environment

Conforming to Standards		IEC 61812-1, EN 61812-1
Product Approvals		 File E164353 CNN NKCR  File LR 89150 Guide 3211 07  GL
CE Marking		Zelio Time Timer conforms to European regulations relating to CE Marking
Ambient Air Temperature around the Device	Storage	-40 to 185 °F (-40 to + 85 °C)
	Operation	-4 to 140 °F (-20 to + 60 °C)
Permissible Relative Humidity Range	Conforming to IEC 60721-3-3	15-85 % Environmental Class 3K3
Vibration Resistance	Conforming to IEC 60068-2-6, 10 to 55 Hz	a = 0.35 ms
Shock Resistance	Conforming to IEC 60068-2-27	15 gn - 11 ms
Degree of Protection	Housing	IP 50
	Terminals	IP 20
Degree of Pollution	Conforming to IEC 60664-1	3
Overvoltage Category	Conforming to IEC 60664-1	III
Rated Insulation Voltage	Conforming to IEC	250 V
	Conforming to CSA	300 V
Test Voltage for Insulation Tests	Dielectric test	2.5 kV
	Shock wave	4.8 kV
Voltage Limits	Power supply circuit	0.9-1.1 Uc
Frequency Limits	Power supply circuit	50/60 ± 5 % Hz
Disconnection Value	Power supply circuit	> 0.1 Uc
Mounting Position without Derating	In relation to normal vertical mounting plane	Any position
Connection Maximum C.S.A.	Stranded wire without cable end	2 # 14 AWG (2 x 2.5 mm ²)
	Stranded with cable end	2 # 16 AWG (2 x 1.5 mm ²)
Tightening Torque		4.5-9.9 lb-in (0.6-1.1 Nm)

Immunity to Electromagnetic Interference (EMC) (Application Class 2 Conforming to EN 61812-1)

Electrostatic Discharge	Conforming to IEC 61000-4-2	Level 3 (6 kV contact, 8 kV air)
Electromagnetic Fields	Conforming to IEC 61000-4-3	Level 3 (10 V/m)
Fast Transients	Conforming to IEC 61000-4-4	Level 3 (2 kV)
Shock Waves	Conforming to IEC 61000-4-5	Level 3 (2 kV)
Radiated and Conducted Emissions	CISPR11	Group 1 Class A
	CISPR22	Class A

Power Supply Specifications

Type of Timer		RE9TA On-Delay	RE9RA Off-Delay	RE9MS Multifunction
Supply Voltage		24-240 Vdc or Vac	24-240 Vac	24-240 Vdc or Vac See Page 33.
Voltage Limits	Power supply circuit	0.85-1.1 Un		
Frequency		50-60 ± 5 % Hz		
Control Contact	Mechanical only	In series	Between Y2 and A2	In series
Maximum Length of Connecting Cable	From contact to RE9	–	65.6 ft (20 m)	–
Control Input Consumption	Input Y2	–	5 mA	–

Time Delay Specifications

Setting Accuracy		< ± 20 %		
Repeat Accuracy		< 1 %		
Minimum Reset Time	After the time delay period	100 ms		
Minimum Switching Time		–	40	–
Maximum Immunity to Micro-Breaks	During the time delay period	100 ms	2 ms	70 ms
	After the time delay period	2 ms	–	2 ms
Temperature Drift		≤0.1 % / °C		

Switching Specifications (Solid State Type)

Maximum Continuous Current	At ambient temperature: 20 °C	0.7 A (minimum 10 mA)		
UL Maximum Inductive Ratings	Make 7.0 Amp @ 250 Vac Break 0.7 Amp @ 250 Vac Carry 0.7 Amp @ 250 Vac			
	Make 0.7 Amp @ 250 Vdc Break 0.7 Amp @ 250 Vdc			
Maximum Overload Current	VDE 0435 part. 303, 4.8.3/Class II	15 A for 10 ms		
Maximum Voltage Drop	Closed state	At 0.7 A: 3 V		
Leakage Current	Open state	≤6 mA	≤1 mA	≤6mA
Maximum Dissipated Power		2.5 W	4 W	2.5 W
Derating	For temperature > 20 °C	None (mA)		
Electrical Durability	In millions of operating cycles	> 100		

RE9MS at 60 °C maximum current: up to 48 V/400 mA, from 48 to 240 V/300 mA.

ZELIO-TIME™ Timers - RE9


On-Delay Timers - Selection

On-Delay Timers ☒

De-energized
 Energized
 Open
 Closed
t: Adjustable On-Delay




RE9TA



Power Supply Circuit	Function	Timing Range ■	Catalog Number	Weight lb (kg)
24-240 Vac or Vdc	On-Delay	0.1-10 s	RE9TA11MW	0.24 lb (0.110 kg)
		0.3-30 s	RE9TA31MW	0.24 lb (0.110 kg)
		3-300 s	RE9TA21MW	0.24 lb (0.110 kg)
		40 s - 60 min	RE9TA51MW	0.24 lb (0.110 kg)

Off-Delay Timers ■

De-energized
 Energized
 Open
 Closed
t: Adjustable Off-Delay



Power Supply Circuit	Function	Timing Range ■	Catalog Number	Weight lb (kg)
24-240 Vac	Off-Delay	0.1-10 s	RE9RA11MW7	0.24 lb (0.110 kg)
		0.3-30 s	RE9RA31MW7	0.24 lb (0.110 kg)
		3-300 s	RE9RA21MW7	0.24 lb (0.110 kg)
		40 s - 60 min	RE9RA51MW7	0.24 lb (0.110 kg)

■ For easier adjustment, it is preferable to set the time delay between the maximum value in the range and one tenth of this value. Example: RE9TA11MW timing range 0.1-10 s, recommended use 1-10 s.

ZELIO-TIME™ Timers - RE9 Multi-function Timers - Selection

Multifunction Timers

 De-energized
 Energized
 Open
 Closed
t: Time Delay




RE9MS

Power Supply Circuit	Function	Timing Range	Catalog Number	Weight lb (kg)
24-240 Vac or Vdc	On-Delay 			
24-240 Vac	Interval 			
24-240 Vac	Repeat Cycle Start on energization of the load. 	0.3-30 s and 0.1-10 s	RE9MS21MW	0.24 lb (0.110 kg)
24-240 Vac	Repeat Cycle Start on de-energization of the load. 			


■ For easier adjustment, it is preferable to set the time delay between the maximum value in the range and one tenth of this value. Example: RE9MS21MW timing range 3-30 s, recommended use 30-300 s.

ZELIO-TIME™ Timers - RE9


Dimensions

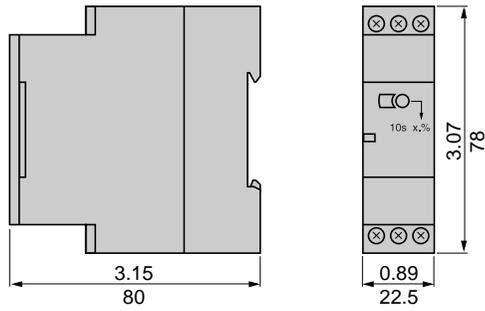

Rail Mounting

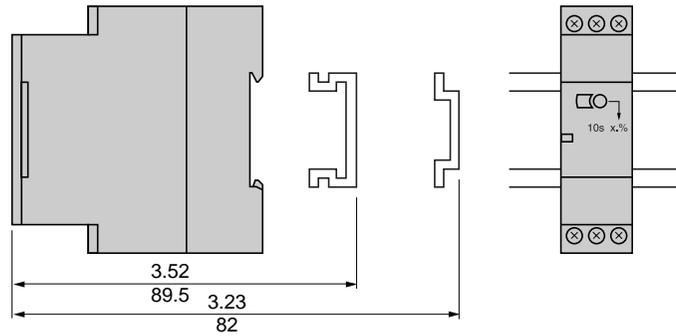


Direct Panel Mounting

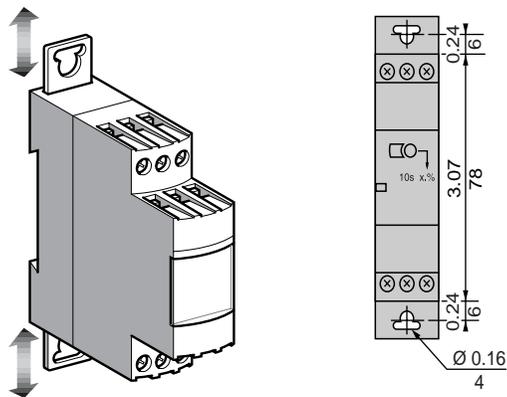

Dual Dimensions = $\frac{\text{in}}{\text{mm}}$


RE9MS




Recommended Wiring Diagrams

RE9MS

On-Delay

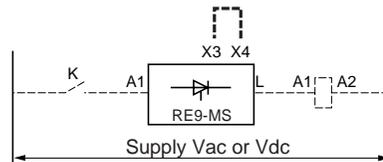

Interval

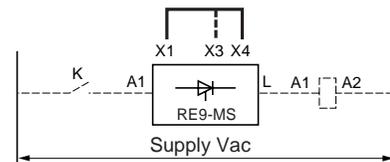

Link to be made between terminals X1 and X4.


Selection of Timing Range

X3-X4 not linked: range 3-300s (factory configuration).

X3-X4 linked: range 0.1-10 s.

Repeat Cycle


Start on Energization of the Load

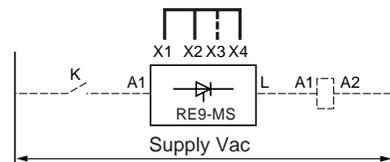


Link to be made between terminals X2 and X4 on one side and X1 and X2 on the other side.

Repeat Cycle

Start on De-Energization of the Load

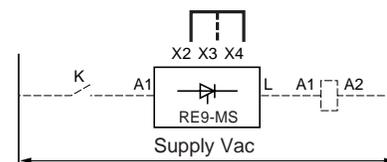

Link to be made between terminals X2 and X4.



NOTE: For supply voltages greater than 30 V, the rated voltage of the load is equal to the supply voltage. For a supply voltage of 24 V, the voltage drop within the RE9 timer must be taken into account (about 3 V); a coil with a nominal voltage of 21 V must therefore be selected for the load.

SETTING PROCEDURE

- Potentiometer for fine adjustment of the time delay, graduated in % of range max. setting **2**.
- Marking of maximum time delay value.
- LEDs, depending on the model:
 - Yellow LED: flashes during the time delay period; permanently on outside the time delay period.


Adjustment of the Time Delay

- The maximum value of the timing range is printed on the product, **2**.
- Example: RE9MS21MW; maximum time delay: 10 s (X3-X4 linked).
- Time required 2.4 s; using potentiometer **1** set the value of the time delay required as a % of value **2**:

$$\text{Percentage of setpoint} = \frac{\text{Trrequired} \times 100}{\text{Trange}}$$

$$\text{Trrequired} = 2.4 \text{ Sec.} \quad \frac{2.4 \times 100}{10} = 24 \%$$

$$\text{Trange} = 3 \text{ Sec.}$$



Schneider Electric USA
8001 Highway 64 East
Knightdale, NC 27545
1-888-SquareD
(1-888-778-2733)
www.us.squared.com

Schneider Electric Canada
19 Waterman Avenue,
M4B 1 Y2
Toronto, Ontario
1-800-565-6699
www.schneider-electric.ca

Catalog No. 9050CT0001R6/04 June 2004 © 1993-2004 Schneider Electric All Rights Reserved
Replaces 9050CT0001 dated 10/00.