



RoHS Compliant Product  
A suffix of "-C" specifies halogen free

## FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

## MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any
- Weight: 1.98 grams (approximate)

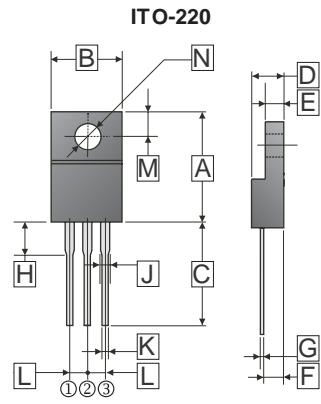

Dimensions in millimeters

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	15.00	15.60	H	3.00	3.80
B	9.50	10.50	J	0.90	1.50
C	13.00	Min	K	0.50	0.90
D	4.30	4.70	L	2.34	2.74
E	2.50	3.10	M	2.50	2.90
F	2.40	2.80	N	Ø 3.1	Ø 3.4
G	0.30	0.70			

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.

Single phase half wave, 60Hz, resistive or inductive load.

For capacitive load, de-rate current by 20%.


TYPE NUMBER	SYMBOL	SP10150	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	150	V
Working Peak Reverse Voltage	$V_{RSM}$	150	V
Maximum DC Blocking Voltage	$V_{DC}$	150	V
Maximum Average Forward Rectified Current Per Leg	$I_F$	5	A
Per Device		10	
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	130	A
Maximum Instantaneous Forward Voltage $I_F = 5 \text{ A}, T_A = 25^\circ\text{C}$ , per leg	$V_F$	0.86	V
$I_F = 5 \text{ A}, T_A = 125^\circ\text{C}$ , per leg		0.75	
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_A=25^\circ\text{C}$	$I_R$	0.03	mA
$T_A=125^\circ\text{C}$		8	
Typical Junction Capacitance (Note 1)	$C_J$	350	pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	4.5	°C / W
Voltage Rate Of Change (Rated $V_R$ )	$dv / dt$	10000	V / $\mu\text{s}$
Operating Temperature Range $T_J$	$T_J$	-50 ~ +150	°C
Storage Temperature Range $T_{STG}$	$T_{STG}$	-65 ~ +175	°C

### NOTES:


1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Thermal Resistance Junction to Case.

## RATINGS AND CHARACTERISTIC CURVES (SP10150)


Typical Forward Current Derating Curve

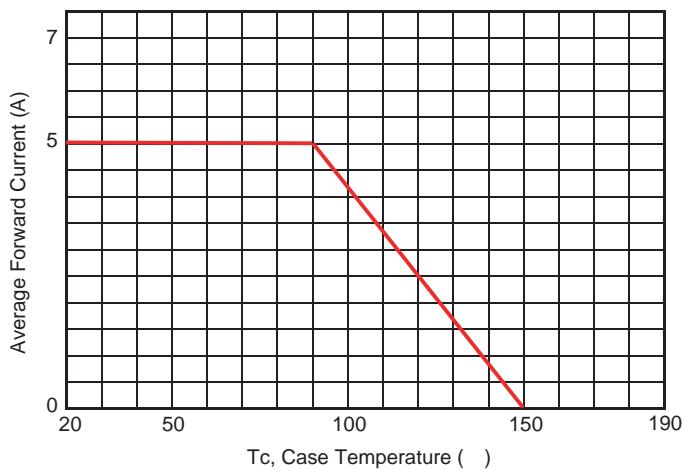


Typical Forward Characteristic

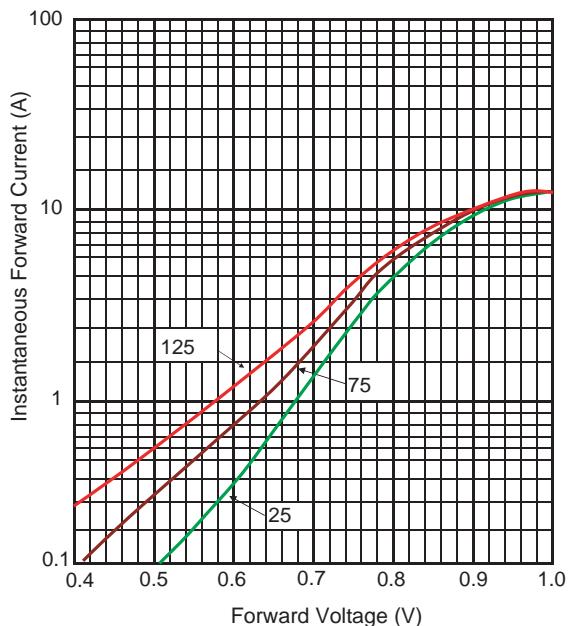

Typical Junction Capacitance

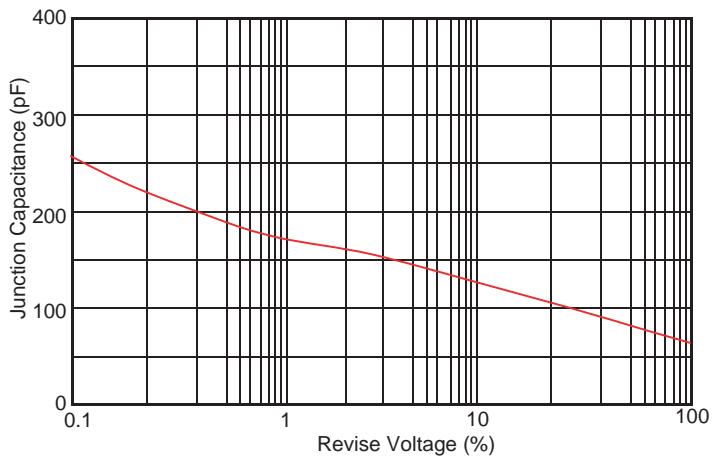

Typical Reverse Characteristic

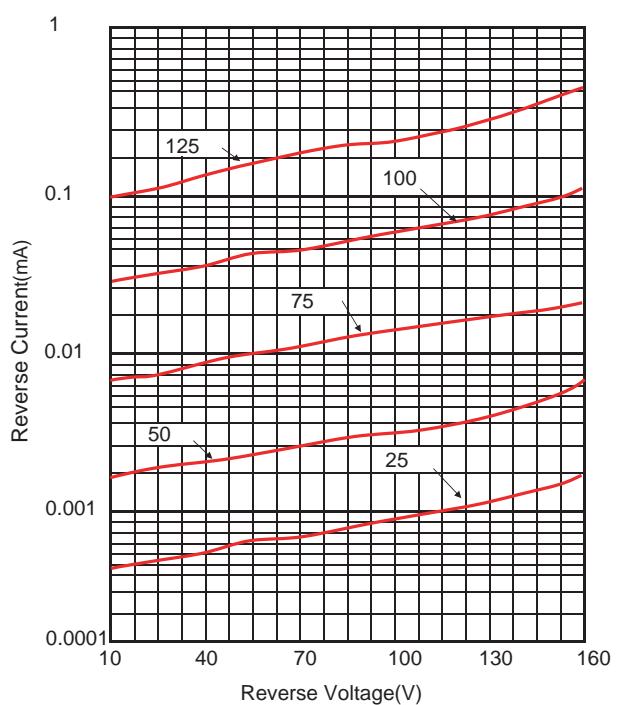

Maximum Non-Repetitive Forward Surge Current

