

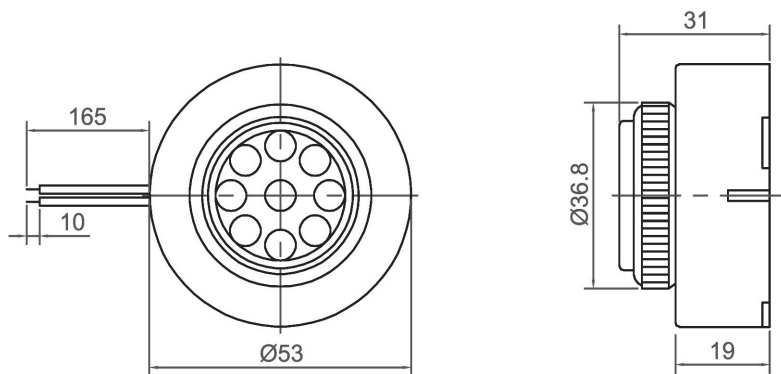


# Piezo Buzzer (DC)


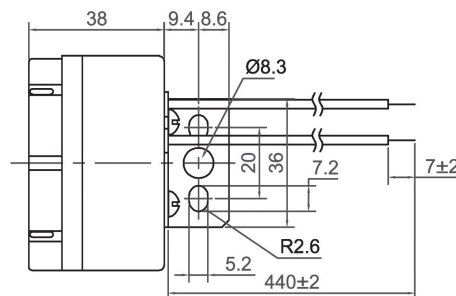


Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CPB5331FC28NW	3 ~ 12	6	20	93 at 30cm	2800 ± 500	Continuous	-30 ~ +70	Noryl	38

CANOPUS

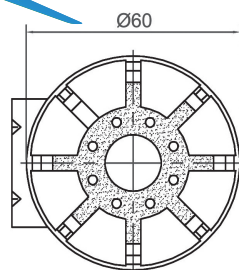

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CPB6038HC28BW	6 ~ 15	12	300	100 at 1m	2800 ± 400	Continuous	-20 ~ +70	ABS	110
CPB6038HD28BW	6 ~ 15	12	300	108 at 1m	2800 ± 500	Normal Pulse	-20 ~ +85	ABS	110
CPB6038IC28BW	12 ~ 28	24	200	103 at 1m	2800 ± 500	Continuous	-20 ~ +70	ABS	110

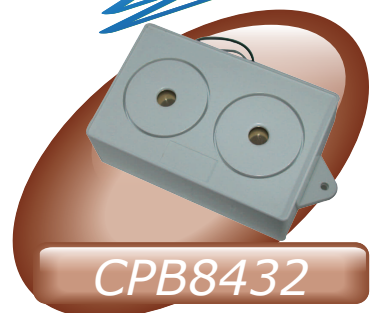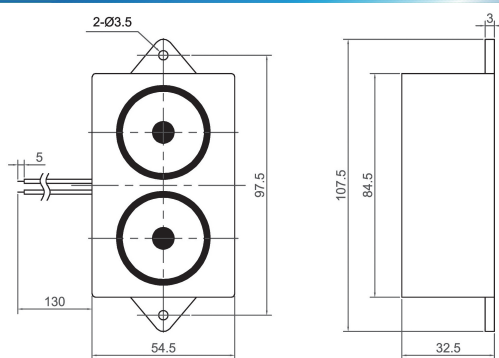

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CPB8432HM26BW	9 ~ 15	12	120	105 at 1m	2600 ~ 3100	Siren	-20 ~ +60	ABS	90
CPB8432HT26BW	6 ~ 15	12	120	105 at 1m	2600 ~ 3100	Two	-20 ~ +60	ABS	90
CPB8432IM15BW	16 ~ 28	24	120	105 at 1m	1500 ~ 3100	Siren	-20 ~ +60	ABS	90
CPB8432IT26BW	16 ~ 28	24	120	105 at 1m	2600 ~ 3100	Two	-20 ~ +60	ABS	90

**Your Efficient Supplier**  
[www.canopus.com.hk](http://www.canopus.com.hk)

TEL.: (852) 2806 2812

Fax: (852) 2652 2216