

Memory Module Specification

KVR333X64C25K2/512

512MB (256MB 32M x 64-Bit x 2 pcs.)
DDR333 CL2.5 184-Pin DIMM Kit

DESCRIPTION:

ValueRAM's KVR333X64C25K2/512 is a kit of two 32M x 64-bit (256MB) DDR333 CL2.5 SDRAM (Synchronous DRAM) memory modules. Total kit capacity is 512MB. The components on each module include nine 32M x 8-bit (8M x 8-bit x 4 Bank) DDR333 SDRAM in TSOP packages. Each 184-pin DIMM uses gold contact fingers and requires +2.5V. The electrical and mechanical specifications are as follows:

FEATURES:

☑ Clock Cycle Time (tCK) 6ns (min.) / 12ns (max.)

✓ Row Cycle Time (tRC)✓ Refresh Row Cycle Time (tRFC)60ns (min.)72ns (min.)

☑ Row Active Time (tRAS) 42ns (min.) / 70,000ns (max.)

✓ Single Power Supply of +2.5V (+/- .2V)
 ✓ Power (IDD0) 1.800 W (operating)

☑ UL Rating 94 V - 0

Note: The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.250" (31.75mm).

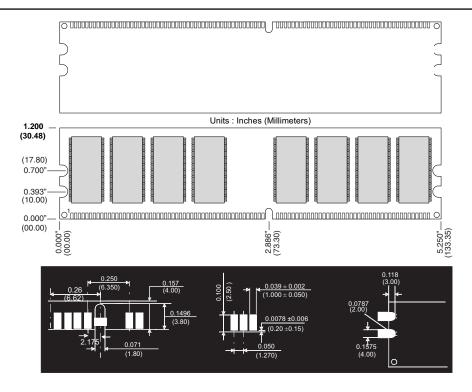


Figure 1: KVR333X64C25K2/512 184-Pin DIMM