


MT305B-SLUG (Green Diffused) - ULTRA BRIGHT LEDs

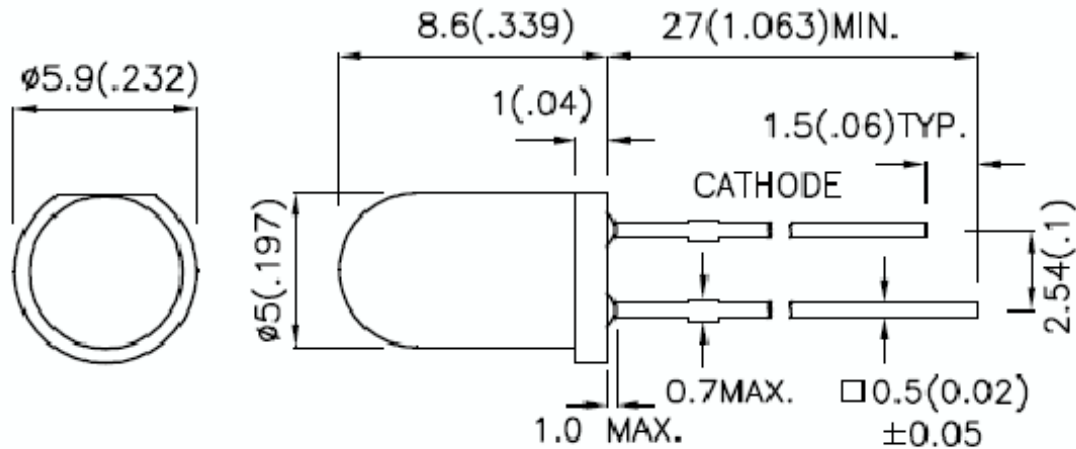

SELECTOR GUIDE

Part Number	Dice	Lens Color / Type	Pack Size	View Angle 2θ _{1/2}
MT305B-SLUG	Green	Green Diffused	5mm Round 30° - 36°	30°

ELECTRICAL / OPTICAL CHARACTERISTICS AT T_A=25°C

Parameter	Symbol	Device	Min.	Typ.	Max.	Units	Test Conditions
Forward Voltage	V _F	Green	-	2.2	2.5	V	I _F =20mA
Reverse Current	I _R	Green	-	-	10	μA	V _R =5V
Luminous Intensity	I _V	Green	18	40	-	mcd	I _F =20mA
Peak Wavelength	λ _{peak}	Green	-	565	-	nm	I _F =20mA
Dominant Wavelength	λ _D	Green	-	568	-	nm	I _F =20mA
Spectral Line Half-Width	Δλ _{1/2}	Green	-	30	-	nm	I _F =20mA

ABSOLUTE MAXIMUM RATINGS AT T_A=25°C

Parameter	Rating	Units
Forward Current (I _F)	25	mA
Power Dissipation (P _D)	105	mW
Reverse Voltage (V _R)	-	V
Operating Temperature (T _{OPR})	-40 ~ +85	°C
Storage Temperature (T _{STG})	-	°C
Lead Solder Temperature (T _{SOL})	260 °C @ for 3 sec. max	

1. All Dimensions Are In Millimeters (inches).
2. Tolerance Is +/-0.25(0.01") Unless Otherwise Noted.
3. Specifications Are Subject To Change Without Notice.