

E-Series Surface Mount Mixer

1 - 500 MHz

ESCM-1

V3.00

Features

- LO Power: +7 dBm
- Up to +1 dBm RF
- Surface Mount

Specifications @ 25°C

Frequency Range		
RF		1 - 500 MHz
LO		1 - 500 MHz
IF		DC - 500 MHz
Conversion Loss (dB)		
2 - 250 MHz	Typical	Maximum
	6.0	7.0
1 - 500 MHz	6.5	8.0
Isolation (dB)		
LO to RF	Typical	Minimum
1 - 10 MHz	60	40
10 - 250 MHz	45	35
250 - 500 MHz	40	30
LO to IF		
1 - 10 MHz	55	40
10 - 250 MHz	45	35
250 - 500 MHz	40	25

Operating Characteristics

Impedance	50 Ohms Nominal
RF input for 1dB Compression	+1 dBm


Ordering Information

Part No.	Packaging
ESCM-1	SM-26 in Tubes
ESCM-1/SM-3	SM-3 in Tubes
ESCM-1/SM-3TR	SM-3 Forward Tape & Reel


Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	50 mW
Peak IF Current	40 mA
Storage Temperature	-55°C to 100°C
Operating Temperature	-55°C to 100°C
Pin Temperature (10 Seconds)	260°C

SM-3

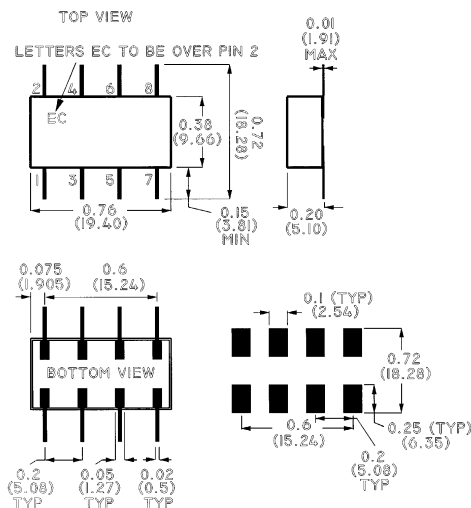

SM-26

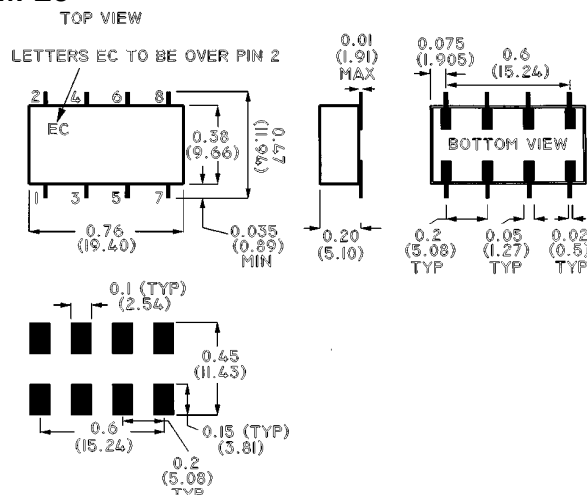

Dimensions in () are in mm.
Unless Otherwise Noted: .x = ±0.04 (1.00)
.xx = ±0.02 (0.50)
.xxx = ±0.010 (0.250)

Pin Configuration

Function	Pin No.
LO	8
RF	1
IF*	3,4
Ground	2,5,6,7

* IF pins must be connected together externally.

S 0140 D