


LSIU80LVD Ultra2 LVD SCSI Host Adapter

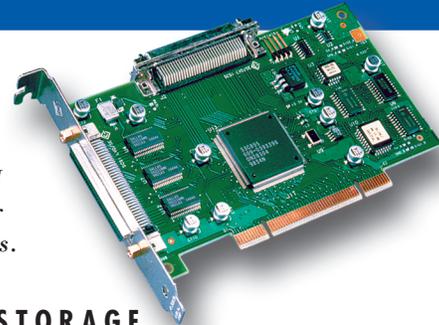

KEY APPLICATIONS

- High-performance desktop PCs and workstations
- Intersystem connections: server and workstation to RAID, network management
- Ultra2 and Ultra SCSI tape drives in servers, workstations and high-end desktops

FEATURES

- High performance single channel Ultra2 SCSI solution
- Supports Ultra2 (80 MBps), Ultra (40 MBps) and Fast (20 MBps) SCSI
- Support LVD or Single-Ended (SE) SCSI devices
- SureLINK™ Domain Validation technology ensures data integrity
- Supports One-Button Disaster Recovery for tape drives for rapid data recovery

Host Bus:

32-bit PCI

SCSI Bus:

16-bit SE and LVD

SCSI Performance:

Ultra2 (80 MBps)

SCSI Connectors:

Internal: 68-pin HD
External: 68-pin HD

No. of SCSI Devices:

15

The LSIU80LVD PCI-to-Ultra2 SCSI host adapter offers a low cost LVD SCSI connection for external storage ideal for backup or disaster recovery applications.

IDEAL FOR DIRECT ATTACH STORAGE

As part of LSI Logic's SCSI host adapter product family, the LSIU80LVD PCI-Ultra2 SCSI host bus adapter is ideal for direct attach storage of tape and optical drive/libraries to a workstation or server. The Ultra2 LVD connection offers higher performance at 80 MBps, longer cable length of 12 meters and higher reliability than Ultra SCSI at an affordable price. The LSIU80LVD supports wide (16-bit) Ultra2, Ultra, and Fast SCSI devices.

System design flexibility is provided by the LSIU80LVD's ability to automatically switch from single-ended operation for legacy Fast/Ultra devices to universal low voltage differential (LVD) operation when LVD enabled or Ultra2 devices are connected. The LSIU80LVD HBA incorporates LSI Logic's LVDlink™ (Low Voltage Differential) technology for superior performance, device connectivity and greater signal reliability. The LVDlink transceivers provide the data reliability of differential signaling without the high cost of high voltage differential (HVD) transceivers

WARRANTY

For more than 15 years, LSI Logic host adapters have been providing high-performance SCSI solutions to leading server, disk array and computer systems worldwide. Each host adapter carries a powerful chip built in LSI Logic's ISO 9001-certified fabrication facilities. Using only the highest quality components, LSI Logic host adapters are assembled and tested in world-class facilities to assure superior product reliability and performance. Due to LSI Logic's stringent quality management programs, this host adapter carries a three-year limited warranty.

	Single-ended (SE)	LVD
Technology	Fast, Ultra2	Ultra2*
Cable lengths (meters)	3	12 (devices) 25 point-to-point
Device supported	Single-ended	LVD

*Backward compatible with Fast and Ultra single-ended SCSI devices.

LSIU80LVD ORDERING INFORMATION

LSIU80LVD	ISA/EISA bracket
-----------	------------------



LSIU80LVD Ultra2 LVD SCSI Host Adapter

Technical Specifications

PCI Bus	32-bit, 33 MHz max	
PCI Modes	Bus master DMA	
PCI Data Burst Transfer Rate	132 MB/second (PCI 32-bit bus @ 33 MHz)	
PCI Card Type	Universal add-in card (3.3V and 5.0V signaling)	
PCI Voltage	+5V \pm 5%	
PCI Form Factor	3.5" x 6.0"	
PCI Power	7.5 Watts, 1.5A @ +5VDC	
Certification Level	PCI 2.1	
SCSI Bus	Wide Ultra2, LVD (Low Voltage Differential) and Ultra Wide SE (Single-Ended)	
SCSI Processor	LSI53C895	
Connectors	External	Internal
	68-pin HD	68-pin HD
Termination	Universal (LVD/SE) termination Automatic cable detection	
LED Indicators	4-pin header for off-board LEDs	
BIOS Flash Memory	128K x 8 flash EEPROM	
Environments	Operating	Storage
Temperature	0°C to 55°C	-40°C to +105°C
Relative Humidity	5 to 90% non-condensing	5 to 90% non-condensing
MTBP	>500,000 hours	
Compliances	CE, VCCI, Canada, C-Tick, FCC class B, UL 94VO	

Software Support

OS Support	Versions
Windows	95, 98, Me, NT4.0, SP4 and above, 2000, and XP
Linux	2.2 and 2.4 kernels
Utilities	Install, Flash, SCSI format, BIOS configuration, and NT configuration
Device Support	OBDR (tape booting) and bootable CD-ROM

INSTALLATION INSTRUCTION FOR WINDOWS NT4.0 AND 2000

Windows 2000, XP and .NET have the driver included on the Windows CD

1. Create Windows driver disk for the LSI Logic SCSI card (download from web site) <http://adapters.lsillogic.com>
2. Boot with Windows CD
3. Press F6 key when the screen displays "Setup is inspecting your computer's hardware configuration"
4. Choose "S" to specify an additional device when the screen displays "Setup has recognized the following mass storage devices in your computer..."
 - a) Install the driver disk made in step 1 in the floppy drive and follow instructions
5. Continue with the Windows install
6. Install the latest service pack

For more information please visit the LSI Logic web sites at:

<http://storageio.lsillogic.com>

<http://adapters.lsillogic.com>

LSI Logic Corporation

North American Headquarters
Milpitas, CA

Tel: 866 574 5741 (within U.S.)
408 954 3108 (outside U.S.)

Host Adapter Group

Southborough, MA

Tel: 888 429 0425

FAX: 508 485 0303

LSI Logic Europe Ltd.

European Headquarters
United Kingdom

Tel: 44 1344 426544

Fax: 44 1344 481039

LSI Logic KK Headquarters

Tokyo, Japan

Tel: 81 3 5463 7165

Fax 81 3 5463 7820

ISO 9001 Certified

The LSI Logic logo design and LVDlink are trademarks or registered trademarks of LSI Logic Corporation. All other brand and product names may be trademarks of their respective companies.

LSI Logic Corporation reserves the right to make changes to any products and services herein at any time without notice. LSI Logic does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by LSI Logic; nor does the purchase, lease, or use of a product or service from LSI Logic convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual property rights of LSI Logic or of third parties.

Copyright ©2002 by LSI Logic Corporation.
All rights reserved.

Order No. S20115
7/02-1M – Printed in USA

