


WORLDWIDE




T-1 Bi-Pin Base (.050") & T-1 Bi-Pin Base (.100")

**T-1 Bi-Pin Base (.050")**

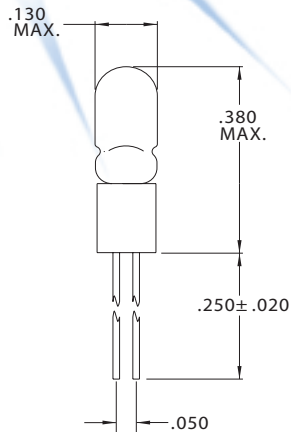

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM7272	5.0	.075	.090	16,000	C-2R
CM7274	5.0	.115	.150	16,000	C-2R
CM7680	5.0	.060	.030	60,000	C-2R
CM7683	5.0	.060	.050	25,000	C-2R
CM7714	5.0	.075	.090	25,000	C-2R
CM7715	5.0	.115	.150	40,000	C-2R
CM9343	5.0	.060	.050	25,000	C-2R
CM9344	5.0	.115	.150	40,000	C-2R
CM9347	5.0	.075	.090	25,000	C-2R
CM8095	10.0	.027	.100	10,000	C-2F
CM8097	12.0	.060	.150	10,000	C-2F
CM8098	14.0	.065	.150	10,000	C-2F
CM9388	14.0	.040	.150	16,000	C-2F
CM8099	18.0	.026	.150	10,000	C-2F
CM7839	28.0	.024	.150	4,000	CC-2F
CM9393	28.0	.024	.150	4,000	C-2F

**T-1 Bi-Pin Base (.100")**

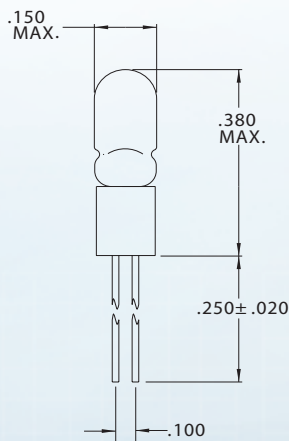

Part Number	Design Voltage	Amps	MSCP	Life Hours	Filament Type
CM8-2409	1.5	.075	.030	16,000	C-2R
CM8-2411	3.0	.008	.001	16,000	C-2R
CM8-2420	3.0	.013	.001	16,000	C-2R
CM8-2400	5.0	.115	.150	40,000	C-2R
CM8-2401	5.0	.060	.150	5,000	C-2R
CM8-2405	5.0	.020	.030	10,000	C-2R
CM8-2408	5.0	.030	.030	16,000	C-2R
CM8-2410	5.0	.017	.005	10,000	C-2R
CM8-2412	5.0	.060	.030	60,000	C-2R
CM8-2413	5.0	.060	.050	25,000	C-2R
CM8-2414	5.0	.075	.090	25,000	C-2R
CM8-2415	5.0	.125	.250	5,000	C-2R
CM8-2416	10.0	.027	.100	10,000	C-2F
CM8-2417	12.0	.060	.150	10,000	C-2F
CM8-2418	14.0	.065	.150	10,000	C-2F
CM8-2419	18.0	.026	.150	10,000	C-2F
CM8-2402	28.0	.024	.150	4,000	CC-2F



America:  
 CML Innovative Technologies, Inc.  
 147 Central Avenue  
 Hackensack, NJ 07601 -USA  
 Tel:1-201-489 -8989  
 Fax:1-201-489 -6911  
 e-mail:americas@cml-it.com

Europe:  
 CML Technologies GmbH &Co.KG  
 Robert-Bunsen-Str.1  
 67098 Bad Dürkheim -GERMANY  
 Tel:+49 (0)6322 9567-0  
 Fax:+49 (0)6322 9567-88  
 e-mail:europe@cml-it.com

Asia:  
 CML Innovative Technologies, Inc.  
 61 Aida Street  
 Singapore 459975  
 Tel:(65)9630 -5003  
 e-mail:asia@cml-it.com