




Quarter-Turn, Screw-in Type

small version

Page
1 - 050

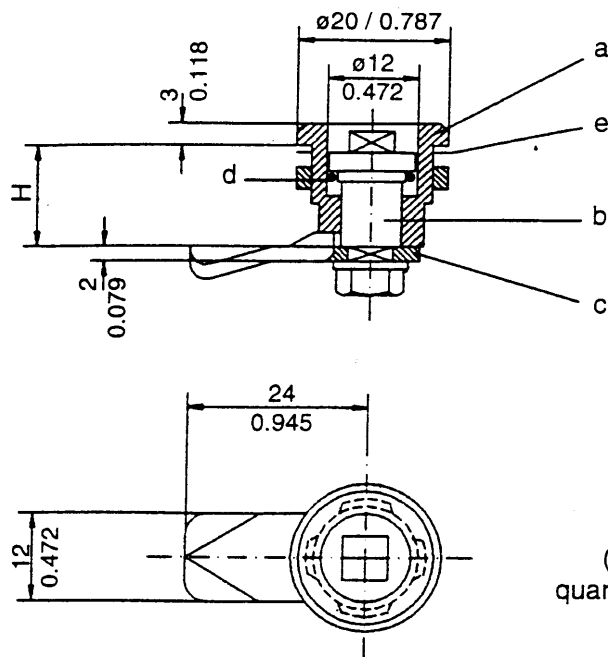

For finger pull refer
to page 1 - 060.

Cut-out

(A complete, assembled
quarter-turn fits through cut-out)

Quarter-turn, (90°), LH and RH application.

The 3 basic parts (housings, inserts and cams) can be
combined to meet your requirements.

IP 65 (NEMA 4/12) on request

Max. door thickness 5 mm / 0.197

On request this quarter-turn can be assembled by DIRAK

To be ordered separately:

	Part - No.		
	chrome	black	key zinc die
a) Housing with nut earthing nut earth (ground) clip	220 - 9001 220 - 9002 220 - 9005	220 - 9003 220 - 9004 220 - 9006	204 - 0112 2Q4 - 0111
b) Insert with screw and wave washer Triangular 6,5 mm Square 6,0 mm Slotted 1,5 mm Socket head 6,0 mm (Allen)	220 - 9101 220 - 9102 220 - 9103 220 - 9107	220 - 9104 220 - 9105 220 - 9106	
c) Cam H = 7,5 mm / 0.295 13,5 mm / 0.531 19,5 mm / 0.768	220 - 0503 220 - 0501 220 - 0502		
Water-, oil-, and dust-tight (IP 65, NEMA 4/12) with d) O - ring	220 - 0601		
e) Flat external seal	220 - 0701		
On request assembled by DIRAK:			
without O-ring = a) +b) +c)	220 - 0001		
with O-ring = a) +b) +c) +d) +e)	220 - 0002		