

General Purpose Rectifier, 3.0A

Features

- Diffused junction
- High efficiency
- Low forward voltage drop
- Low power loss
- High surge current capability

**Mechanical Characteristics**


- Case: Molded Plastic
- Cathode indicated by Polarity band
- Mounting position: Any
- Terminals: Finish Tin plated, Solderable per MIL-STD-202, Method 208
- Weight: 0.33 grams (approx.)

DO-201AD (DO-27)

Maximum Ratings ($T_A = 25^0\text{C}$ unless otherwise specified)			
Parameter	Symbol	1N5402	Units
Maximum repetitive peak reverse voltage	V_{RRM}	200	V
Maximum RMS voltage	V_{RMS}	140	V
Maximum DC blocking voltage	V_{DC}	200	V
Maximum average forward output current @ $T_A = 105^0\text{C}$	$I_{F(AV)}$	3.0	A
Peak forward surge current (8.3ms) single half sine-wave superimposed on rated load	I_{FSM}	200	A

Electrical Characteristics ($T_A = 25^0\text{C}$ unless otherwise specified)			
Parameters	Symbol	1N5402	Units
Maximum DC forward voltage drop @ 3.0A DC	V_F	1.0	V
Maximum DC reverse current @ rated DC blocking voltage	I_R	5.0	μA
$T_A = 25^0\text{C}$		50	
Rating for fusing ($t < 8.3\text{ms}$)	I^2t	3.7	A^2sec

Thermal and Mechanical Specifications ($T_A = 25^0\text{C}$ unless otherwise specified)			
Parameters	Symbol	Values	Units
Typical thermal resistance, junction to ambient	$R_{\theta JA}$	25	$^0\text{C}/\text{W}$
Operating and Storage temperature range	T_J, T_{Stg}	- 65 to + 150	^0C

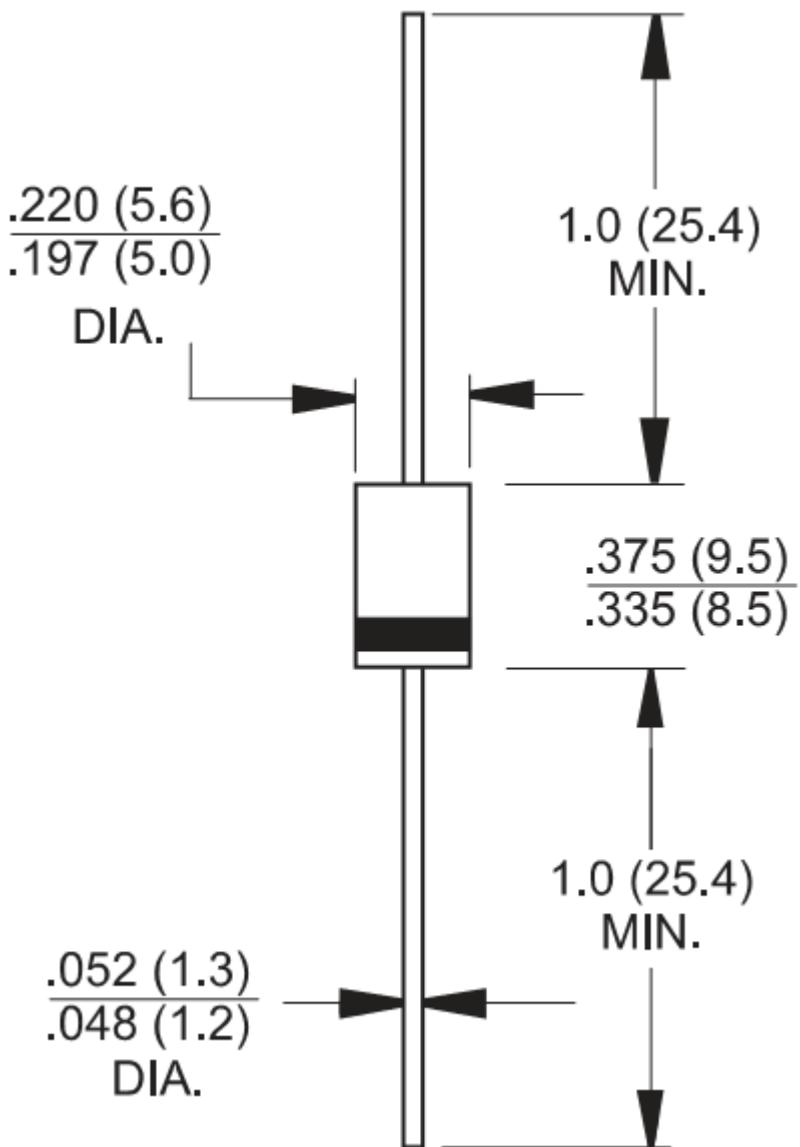

Dimensions in inches and (millimeters)