

SMT40C Series

12 Vin single output

NEW Product



- **40 A current rating**
- **Input voltage range: 10.2 Vdc - 13.8 Vdc**
- **Output voltage range: 0.9 Vdc - 5.0 Vdc**
- **Industry leading value**
 - Cost optimized design
- **Excellent transient response**
- **Output voltage adjustability**
 - Pathway for future upgrades
 - Supports silicon voltage migration
 - Resulting in reduced design-in and qualification time
- **Designed in reliability: MTBF of >4 million hours per Telcordia SR-332**
- **Current share**
- **Available RoHS compliant**



The SMT40C Series is a new high density open frame non-isolated converter for space-sensitive applications. Each model has a wide input range of 10.2 Vdc to 13.8 Vdc and offers a wide 0.9 Vdc to 5.0 Vdc output voltage range with a 40 A load. An external resistor adjusts the output voltage from its pre-set value of 0.9 V to any value up to 5 V. Typical efficiencies are 92% at full load conditions. The SMT40C series offers remote ON/OFF and overcurrent protection as standard. With full international safety approval including EN60950 and UL/cUL60950, the SMT40C reduces compliance costs and time to market.



2 YEAR WARRANTY

All specifications are typical at nominal input $V_{in} = 12\text{ V}$, full load at $25\text{ }^{\circ}\text{C}$ unless otherwise stated

SPECIFICATIONS

OUTPUT SPECIFICATIONS

Voltage adjustability	(See Note 5)	0.9-5.0 Vdc
Output setpoint accuracy	1.0% trim resistors	$\pm 3.0\%$
Line regulation	Low line to high line	$\pm 0.2\%$ max.
Load regulation	Full load to min. load	$\pm 1.5\%$ max.
Min/max load		0 A/40 A
Overshoot	At turn-on	1.0% max.
Undershoot	At turn-off	100 mV max.
Ripple and noise	(See Note 1)	50 mV pk-pk 15 mV rms
Transient response	(See Note 2)	75 mV max. deviation 50 μs recovery to within regulation band
Current share	Full load	$\pm 10\%$

INPUT SPECIFICATIONS

Input voltage range		10.2-13.8 Vdc
Input current	Minimum load Remote OFF	290 mA 30 mA
Input current (max.)		22 A max @ I_o max and $V_{in} = 10.2\text{ V}$
Input reflected ripple	(See Note 4)	150 mA pk-pk
Remote ON/OFF Logic compatibility	ON OFF	Positive logic >2.4 Vdc <0.8 Vdc
Start-up time	Power up Remote ON/OFF	<30 ms <30 ms
Turn ON threshold		9.0 Vdc typ.
Turn OFF threshold		7.6 Vdc typ.

GENERAL SPECIFICATIONS

Efficiency		92% typ.
Switching frequency	Fixed	300 kHz typ.
Approvals and standards	(See Note 7)	TÜV Product Services IEC60950, UL/cUL60950
Material flammability		UL94V-0
Weight		28.3 g (1.0 oz)
Coplanarity		150 μm
MTBF	Telcordia SR-332, method II @ $40\text{ }^{\circ}\text{C}$	4,585,991 hours

ENVIRONMENTAL SPECIFICATIONS

Thermal performance	Operating ambient, temperature	$0\text{ }^{\circ}\text{C}$ to $+80\text{ }^{\circ}\text{C}$
(See Note 9)	Non-operating	$-40\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$

PROTECTION

Short-circuit	Foldback, non-latching
Over-temperature	Hiccup, non-latching

RECOMMENDED SYSTEM CAPACITANCE

Input capacitance	(See Note 10) $2 \times 270\text{ }\mu\text{F}/20\text{ m}\Omega$ ESR max.
Output capacitance	(See Note 10) $3 \times 680\text{ }\mu\text{F}/10\text{ m}\Omega$ ESR max.

International Safety Standard Approvals



UL/cUL CAN/CSA 22.2 No. 60950
UL 60950 File No. E139421



TÜV Product Service (EN60950:2000)
Certificate No. B 04 08 19870 228
CB report and certificate to IEC60950-US/6415C/UL

SMT40C Series

12 Vin single output

DC-DC CONVERTERS C Class Non-isolated

2

For the most current data and application support visit www.artesyn.com/powergroup/products.htm

NEW Product

OUTPUT POWER (MAX.)	INPUT VOLTAGE	OVP	OUTPUT VOLTAGE ⁽¹¹⁾	OUTPUT CURRENT (MIN.)	OUTPUT CURRENT (MAX.)	EFFICIENCY	REGULATION		MODEL NUMBER ^(13,14)
							LINE	LOAD	
200 W	10.2-13.8 Vdc	N/A	0.9-5.0 Vdc	0 A	40 A	92%	±0.2%	±1.5%	SMT40C-12SADJJ

Part Number System with Options

SMT40C-12SADJ-SJ

Product Family
SMT = Surface Mount

Rated Output Current
40 = 40Amps

Performance
C = Cost Optimized

Packaging Options ⁽¹³⁾
J = Pb-free (RoHS 6/6 compliant)

Current Sharing ⁽¹²⁾
No Suffix = Non-isolated
Suffix '-S' = Isolated

Number of Outputs
SADJ = Single Adjustable Output

Input Voltage
12 = 10.2 Vdc to 13.8 Vdc

Output Voltage Adjustment of the SMT40C Series


The ultra-wide output voltage trim range offers major advantages to users who select the SMT40C series. It is no longer necessary to purchase a variety of modules in order to cover different output voltages. The output voltage can be trimmed in a range of 0.9 Vdc to 5.0 Vdc. When the SMT40C series converter leaves the factory the output has been adjusted to the default voltage of 0.9 V.

Notes

- 1 Measured as per recommended set-up. $2 \times C_{in} = 270 \mu F$ (20 mΩ ESR max, $3 \times C_{out} = 680 \mu F$ (10 mΩ ESR max).
- 2 $di/dt = 10 A/\mu s$, $V_{in} = \text{Nom}$, $T_c = 25^\circ C$, load change = 0.50 I_o max. to 0.75 I_o max. and 0.75 I_o max. to 0.50 I_o max.
- 3 External input fusing is recommended.
- 4 Measured with external filter. See Application Note 170 for details.
- 5 Uses external resistor from trim pin to output ground. See Application Note 170 for details.
- 6 Signal line assumed <3 m in length.
- 7 This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- 8 Power-up is the time from application of dc input to Power Good enabled. Remote ON/OFF is from ON/OFF asserted high to power good enabled.
- 9 See Application Note 170 for operation above $50^\circ C$.
- 10 See Application Note 170 for ripple current requirements.
- 11 These models have a wide trim output. The unit has an output of 0.9 Vdc to 5 Vdc. An external resistor adjusts the output voltage.
- 12 For redundant current sharing applications that use ORing diodes to separate the outputs, please add the suffix '-S' to the part number, e.g. SMT40C-12SADJ-SJ. Please refer to Application Note 170 for further details.
- 13 TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- 14 NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.

SMT40C Series

12 Vin single output

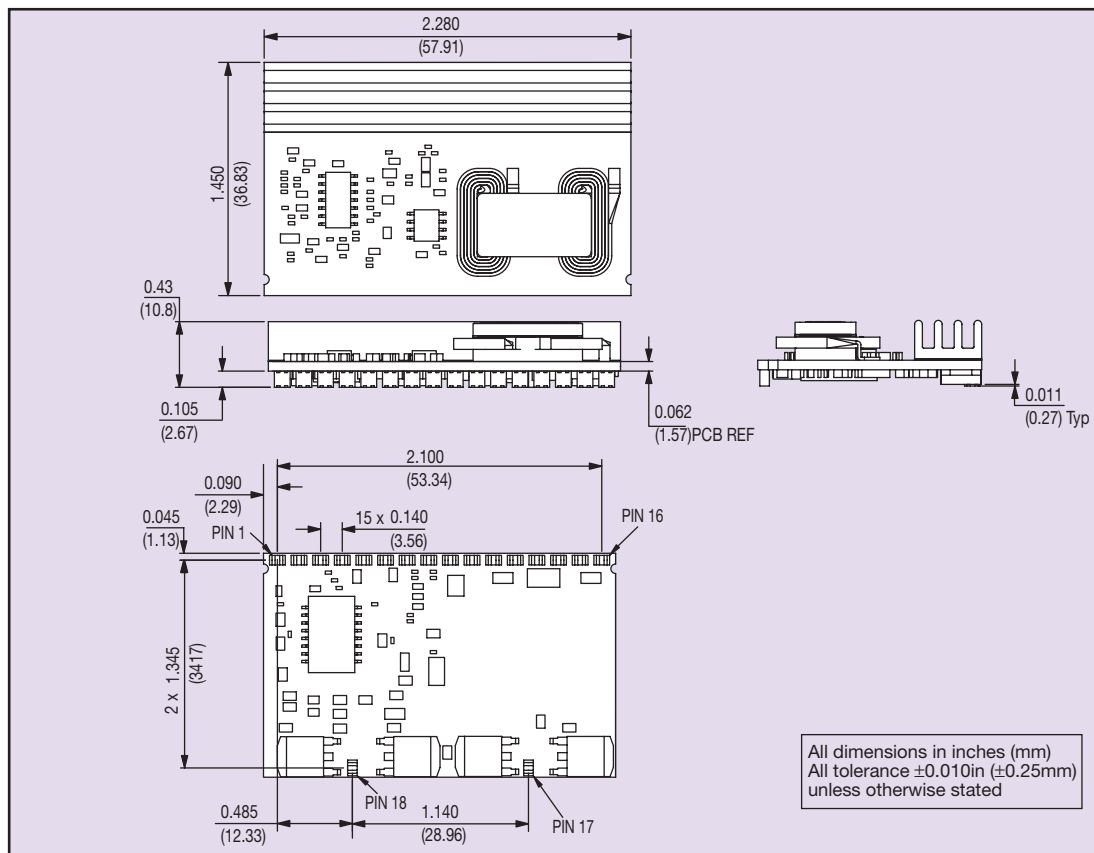

PIN CONNECTIONS			
PIN NO.	FUNCTION	PIN NO.	FUNCTION
1	Current Share	10	Vin
2	Trim	11	Vin
3	GND	12	Vout
4	GND	13	Vout
5	GND	14	GND
6	Sense-	15	Vout
7	Sense+	16	GND
8	Remote ON/OFF	17	Mechanical Support
9	Power Good	18	Mechanical Support