

T3/DS3/E3/STS-1 TRANSFORMERS

Dual SMT, Extended Temperature Range



- Dual SMT package contains both transmit and receive transformers
- Operating temperature of -40°C to +85°C
- Models matched to leading transceiver ICs
- Return loss meets requirements of G.703
- 1500 Vrms isolation per UL1459 and UL1950

Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C


Part Number	Turns Ratio (±2%)		OCL Primary @ 25°C (μH MIN)		OCL Primary @ -40°C (μH MIN)		L _L (μH MAX)		C _{w/w} (pF MAX)		Isolation Voltage (Vrms MIN)	Package/ Schematic	Primary Pins	
	TX	RX	TX	RX	TX	RX	TX	RX	TX	RX			TX	RX
T3020	1:2CT	1:1	40	100	19	40	.120	.120	10	10	1500	BH/1	16-14	6-8
TX3025	1CT:1CT	1:1	100	100	40	40	.120	.120	10	10	1500	BH/2	6-8	16-15
TX3026	1:2CT	1:1	100	100	40	40	.120	.120	10	10	1500	BH/3	7-8	16-15

NOTE: Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (ex: T3020T).

Mechanicals




Schematics

BH

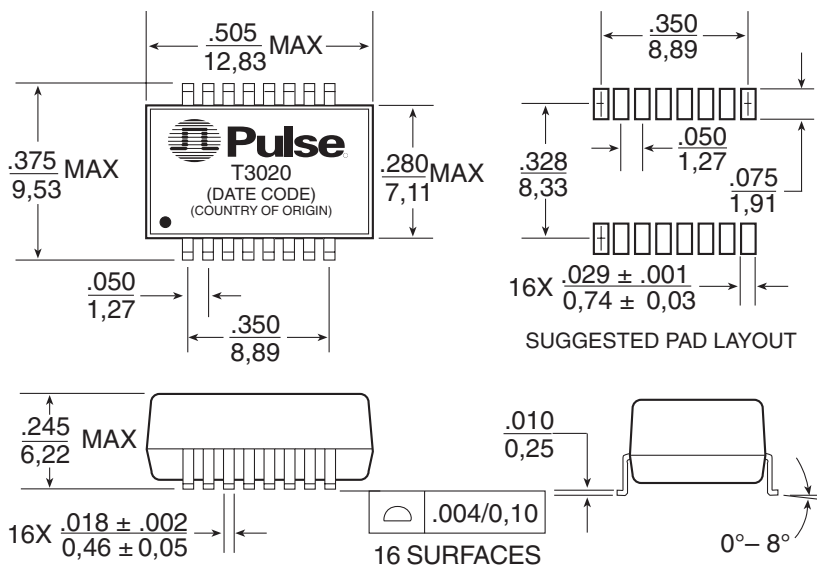

Weight1.0 grams
Tape & Reel600/reel
Tube40/tube

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$



T3/DS3/E3/STS-1 TRANSFORMERS

Dual SMT, Extended Temperature Range



Transformer Selection Guide

IC Manufacturer IC Part Number	Octal SMT Standard Temp TX & RX	Dual SMT Ext Temp TX & RX	Single SMT				Single THT		Single THT 3 kVrms	
			Standard Temp		Extended Temp		Transmit	Receive	Transmit	Receive
			Transmit	Receive	Transmit	Receive				
Conexant (Rockwell)										
CN8331, CN8332, CN8333	T3048	T3020 1	PE-65967	PE-65967	T3001	T3001	PE-65966	PE-65966	PE-68629	PE-68629
Infineon Technologies										
PEB3452	—	—	—	—	T3027	T3011/ T3001	—	—	—	—
Lucent Technologies										
T7296	T3048	—	PE-65967	—	T3001	—	PE-65966	—	PE-68629	
Exar										
XRT7295, XRT7295E	T3048	T3020 1	—	PE-65967	—	T3001	—	PE-65966	—	PE-68629
XRT7296, XRT7298	T3048	T3020 1	PE-65967	—	T3001	—	PE-65966	—	PE-68629	—
XRT73L00, L03, L04	T3048	T3020 1	PE-65967	PE-65967	T3001	T3001	PE-65966	PE-65966	PE-68629	PE-68629
XRT7300, XRT7302	T3048	T3020 1	PE-65967	PE-65967	T3001	T3001	PE-65966	PE-65966	PE-68629	PE-68629
TDK Semiconductor										
78P2241	T3049/T3048	T3020	PE-65968	PE-65967	T3002	T3001	PE-65969	PE-65966	PE-68630	PE-68629
78P2244/43/42	T3049/T3048	T3020	PE-65968	PE-65967	T3002	T3001	PE-65969	PE-65966	PE-68630	PE-68629
78P7200L	T3049/T3048	T3020	PE-65968	PE-65967	T3002	T3001	PE-65969	PE-65966	PE-68630	PE-68629
78P7200	T3049 2	T3020 1	PE-65968	PE-65968	T3002	T3002	PE-65969	PE-65969	PE-68630	PE-68630
78P2362, 78P2361	T3049/T3048	T3020	PE-65968	PE-65967	T3002	T3001	PE-65969	PE-65966	PE-68630	PE-68629
Transwitch										
MRT TXC-02050 E3	T3049/T3048	T3020	PE-65968	PE-65967	T3002	T3001	PE-65969	PE-65966	PE-68630	PE-68629
ART TXC-02020	T3048	T3020 1	PE-65967	PE-65967	T3001	T3001	PE-65966	PE-65966	PE-68629	PE-68629
ARTE TXC-02021	T3048	T3020 1	PE-65967	PE-65967	T3001	T3001	PE-65966	PE-65966	PE-68629	PE-68629
DART TXC-2030, DS3	T3048	T3020 1	PE-65967	PE-65967	T3001	T3001	PE-65966	PE-65966	PE-68629	PE-68629
DART TXC-2030, E3	T3049/T3048	T3020	PE-65968	PE-65967	T3002	T3001	PE-65969	PE-65966	PE-68630	PE-68629
DS3LIM-SN TXC20153G	T3048	T3020 1	PE-65967	PE-65967	T3001	T3001	PE-65966	PE-65966	PE-68629	PE-68629
E3LIM TXC-20163	T3049/T3048	T3020	PE-65968	PE-65967	T3002	T3001	PE-65969	PE-65966	PE-68630	PE-68629

NOTE: For other T3/DS3/E3/STS-1 Transformers, please see data sheets **T606** and **T619**.

Application Notes

1. The transformers have been developed for use as transmit and receive transformers in T3 or DS3 links, using bit rates of 44.736 Mbps and B3ZS coding on coaxial cable. The characteristics allow compliance with the pulse templates of CCITT G.703 as well as ATT T.A.34. The transformers are also suitable for the E3 interface at 34.368 Mbps with HDB3 coding or STS-1 applications, at 51.84 Mbps according to Bellcore TA-NWT-000253.
2. Bandwidth specifications are typical in a 75 Ω system. Return loss meets the requirements of G.703. Materials used in the products are UL94-V0 recognized. Products meet the requirements of IEC 695-2-2 (Needle Flame Test).
3. For those applications requiring a 1:1 turns ratio on the transmit side, use only one half of the secondary (2CT) winding.
4. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. TS3026T)

For More Information :

UNITED STATES (Worldwide)	UNITED KINGDOM (Northern Europe)	FRANCE (Southern Europe)	SINGAPORE (Southern Asia)	TAIWAN, R.O.C. (Northern Asia)	HONG KONG (China/Hong Kong)	DISTRIBUTOR
12220 World Trade Drive San Diego, CA 92128 U.S.A. http://www.pulseeng.com TEL: 858 674 8100 FAX: 858 674 8262	1 & 2 Huxley Road The Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 287 8998 FAX: 65 280 0080	3F-4, No. 81, Sec. 1 HsinTai Wu Road Hsi-Chih, Taipei Hsien Taiwan, R.O.C. Tel: 886 2 2698 0228 FAX: 886 2 2698 0948	19/F, China United Plaza 1008 Tai Nan West Street Cheung Sha Wan, Kowloon Hong Kong, China TEL: 852 2788 6588 FAX: 852 2776 1055	

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.