


Mechanical Buzzer (DC)




CMEB1715

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Fundamental Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CMEB1715A04BW	1 ~ 3	1.5	20	70 at 20cm	400±100	Continuous	-10 ~ +60	ABS	10
CMEB1715C04BW	2 ~ 4	3.6	25	70 at 20cm	400±100	Continuous	-10 ~ +60	ABS	10
CMEB1715F04BW	4 ~ 8	6	25	75 at 20cm	400±100	Continuous	-10 ~ +60	ABS	10
CMEB1715G04BW	6 ~ 12	9	25	75 at 20cm	400±100	Continuous	-10 ~ +60	ABS	10
CMEB1715H04BW	9 ~ 15	12	25	75 at 20cm	400±100	Continuous	-10 ~ +60	ABS	10
CMEB1715I04BW	15 ~ 27	24	30	75 at 20cm	400±100	Continuous	-10 ~ +60	ABS	10

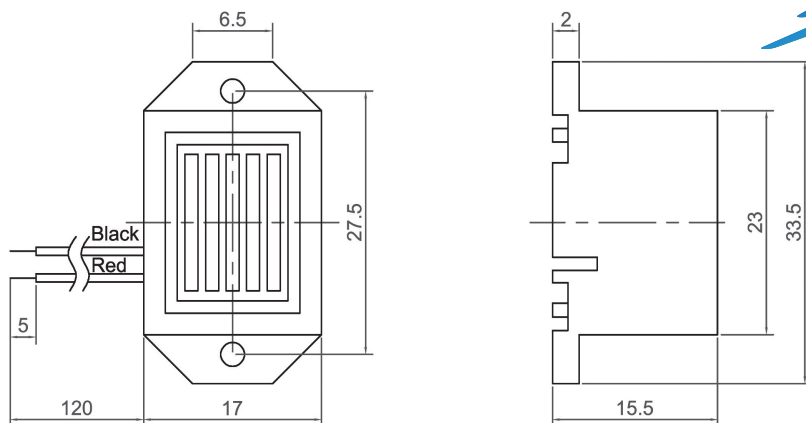

CMEB2315

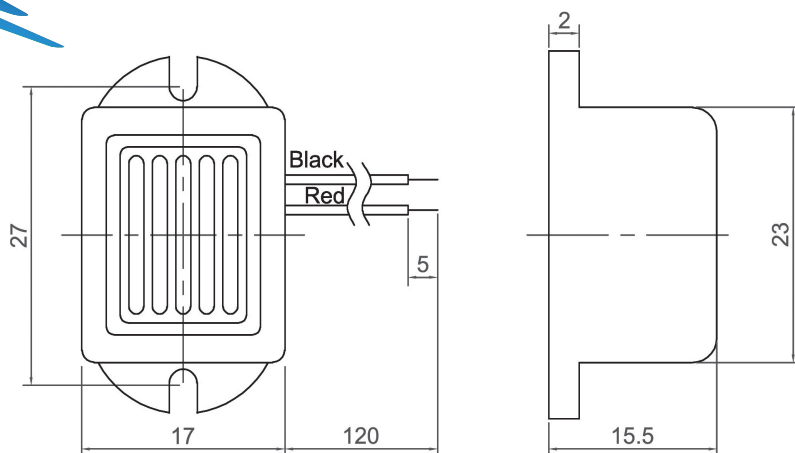

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Fundamental Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CMEB2315A04BW	1 ~ 3	1.5	20	70 at 20cm	400±100	Continuous	-10 ~ +60	ABS	10
CMEB2315C04BW	2 ~ 4	3.6	25	70 at 20cm	400±100	Continuous	-10 ~ +60	ABS	10
CMEB2315F04BW	4 ~ 8	6	25	75 at 20cm	400±100	Continuous	-10 ~ +60	ABS	10
CMEB2315G04BW	6 ~ 12	9	25	75 at 20cm	400±100	Continuous	-10 ~ +60	ABS	10
CMEB2315H04BW	9 ~ 15	12	25	75 at 20cm	400±100	Continuous	-10 ~ +60	ABS	10
CMEB2315I04BW	15 ~ 27	24	30	75 at 20cm	400±100	Continuous	-10 ~ +60	ABS	10

Your Efficient Supplier
www.canopus.com.hk

TEL.: (852) 2806 2812

Fax: (852) 2652 2216

CANOPUS