

KR Electronics

General Description


KR 2829 is a 760 MHz bandpass filter. The filter has a minimum 3 dB bandwidth of 50 MHz and greater than 20 dB at 680 MHz and 845 MHz. Other center frequencies and bandwidths are available. Please consult the factory.

Features


- 760 MHz Lowpass
- N Connectors
- 50 Ω Source and Load

Typical Performance

Passband Amplitude & Group Delay (1 dB/div & 5 nsec/div)

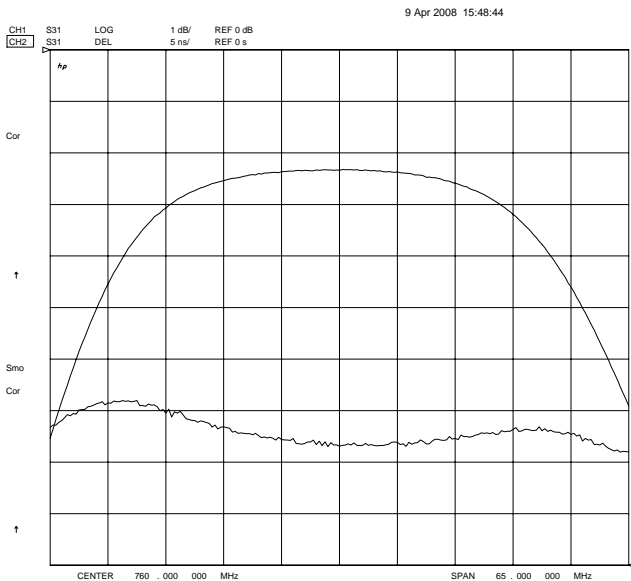

Overall Response (10 dB/div)

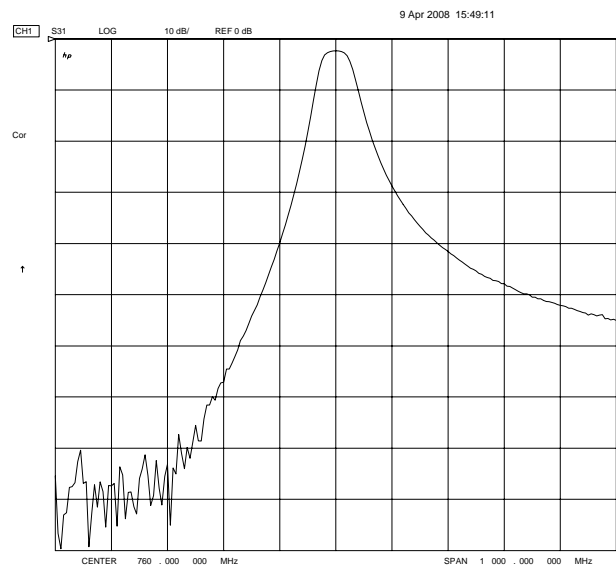

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2829

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	760 MHz
Insertion Loss	< 3.75 dB (2.5 dB typical)
3 dB Bandwidth	50 to 60 MHz
Attenuation at 680 MHz	20 dB min
Attenuation at 845 MHz	20 dB min
Source and Load	50 Ω

Physical Dimensions

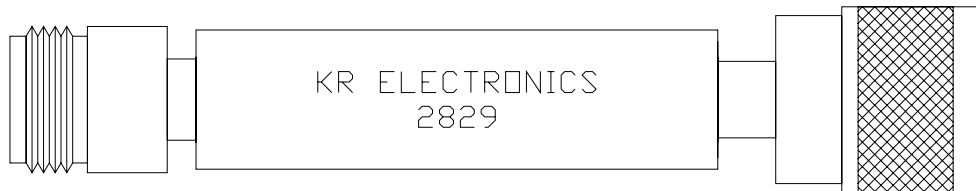

Notes:

1. Rectangular case 0.6" x 0.6" x 2.25"
2. N(f) to N(m) connectors
3. Other connectors and case configurations available