
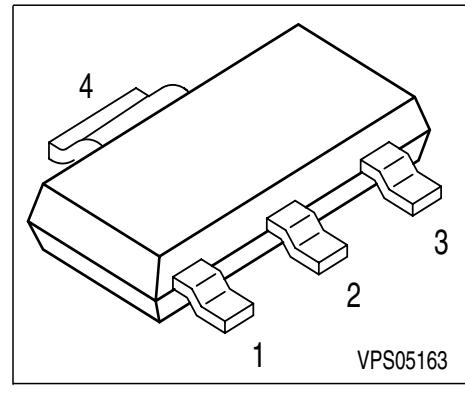


## PNP Silicon Darlington Transistors

- For general AF applications
- High collector current
- High current gain
- Complementary types: BCP 29/49 (NPN)



EHA00008

Type	Marking	Pin Configuration				Package
BCP 28	BCP 28	1 = B	2 = C	3 = E	4 = C	SOT-223
BCP 48	BCP 48	1 = B	2 = C	3 = E	4 = C	SOT-223

### Maximum Ratings

Parameter	Symbol	BCP 28	BCP 48	Unit
Collector-emitter voltage	$V_{CEO}$	30	60	V
Collector-base voltage	$V_{CBO}$	40	80	
Emitter-base voltage	$V_{EBO}$	10	10	
DC collector current	$I_C$	500		mA
Peak collector current	$I_{CM}$		800	mA
Base current	$I_B$	100		
Peak base current	$I_{BM}$		200	
Total power dissipation, $T_S = 124 \text{ }^\circ\text{C}$	$P_{tot}$		1.5	W
Junction temperature	$T_j$		150	$^\circ\text{C}$
Storage temperature	$T_{stg}$		-65 ... 150	

### Thermal Resistance

Junction ambient 1)	$R_{thJA}$	$\leq 75$	K/W
Junction - soldering point	$R_{thJS}$	$\leq 17$	

1) Package mounted on pcb 40mm x 40mm x 1.5mm / 6cm<sup>2</sup> Cu

### **Electrical Characteristics at $T_A = 25^\circ\text{C}$ , unless otherwise specified.**

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>DC Characteristics</b>					
Collector-emitter breakdown voltage $I_C = 1 \text{ mA}, I_B = 0$	$V_{(\text{BR})\text{CEO}}$	30	-	-	V
	BCP 28	60	-	-	
Collector-base breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$	$V_{(\text{BR})\text{CBO}}$	40	-	-	
	BCP 28	80	-	-	
Emitter-base breakdown voltage $I_E = 10 \mu\text{A}, I_C = 0$	$V_{(\text{BR})\text{EBO}}$	10	-	-	
	BCP 48				
Collector cutoff current $V_{CB} = 30 \text{ V}, I_E = 0$	$I_{\text{CBO}}$	-	-	100	nA
	BCP 28	-	-	100	
$V_{CB} = 60 \text{ V}, I_E = 0$	BCP 48	-	-	100	
Collector cutoff current $V_{CB} = 30 \text{ V}, I_E = 0, T_A = 150 \text{ }^\circ\text{C}$	$I_{\text{CBO}}$	-	-	10	$\mu\text{A}$
	BCP 28	-	-	10	
$V_{CB} = 60 \text{ V}, I_E = 0, T_A = 150 \text{ }^\circ\text{C}$	BCP 48	-	-	10	
Emitter cutoff current $V_{EB} = 4 \text{ V}, I_C = 0$	$I_{\text{EBO}}$	-	-	100	nA
	BCP 48				
DC current gain 1) $I_C = 100 \mu\text{A}, V_{CE} = 1 \text{ V}$	$h_{\text{FE}}$	4000	-	-	-
	BCP 28	2000	-	-	
DC current gain 1) $I_C = 10 \text{ mA}, V_{CE} = 5 \text{ V}$	BCP 48	10000	-	-	-
	BCP 28	4000	-	-	
DC current gain 1) $I_C = 100 \text{ mA}, V_{CE} = 5 \text{ V}$	$h_{\text{FE}}$	20000	-	-	
	BCP 48	10000	-	-	
DC current gain 1) $I_C = 500 \text{ mA}, V_{CE} = 5 \text{ V}$	$h_{\text{FE}}$	4000	-	-	
	BCP 28	2000	-	-	

1) Pulse test:  $t \leq 300\mu\text{s}$ ,  $D = 2\%$


**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>DC Characteristics</b>					
Collector-emitter saturation voltage <sup>1)</sup> $I_C = 100 \text{ mA}, I_B = 0.1 \text{ mA}$	$V_{CEsat}$	-	-	1	V
Base-emitter saturation voltage 1) $I_C = 100 \text{ mA}, I_B = 0.1 \text{ mA}$	$V_{BEsat}$	-	-	1.5	
<b>AC Characteristics</b>					
Transition frequency $I_C = 50 \text{ mA}, V_{CE} = 5 \text{ V}, f = 100 \text{ MHz}$	$f_T$	-	200	-	MHz
Collector-base capacitance $V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$	$C_{cb}$	-	8	-	pF

1) Pulse test:  $t \leq 300\mu\text{s}$ ,  $D = 2\%$


**Total power dissipation**  $P_{\text{tot}} = f(T_A^*; T_S)$

\* Package mounted on epoxy

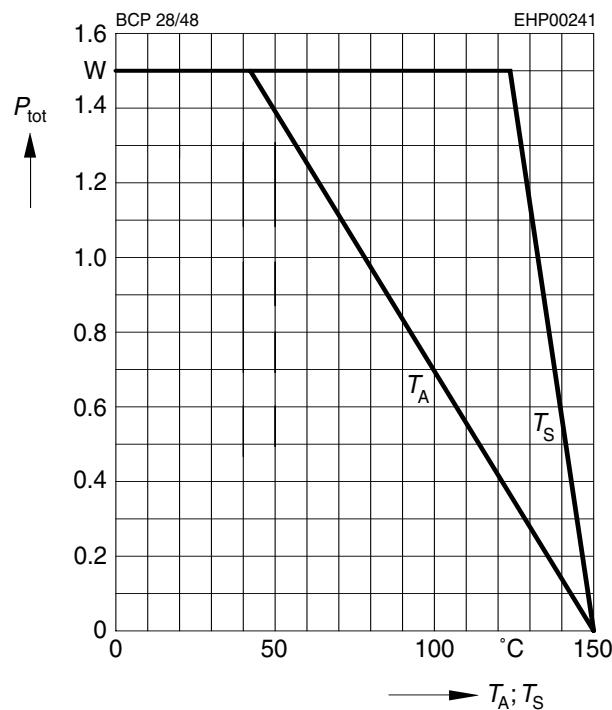


**Collector cutoff current**  $I_{\text{CBO}} = f(T_A)$

$V_{\text{CB}} = V_{\text{CEmax}}$

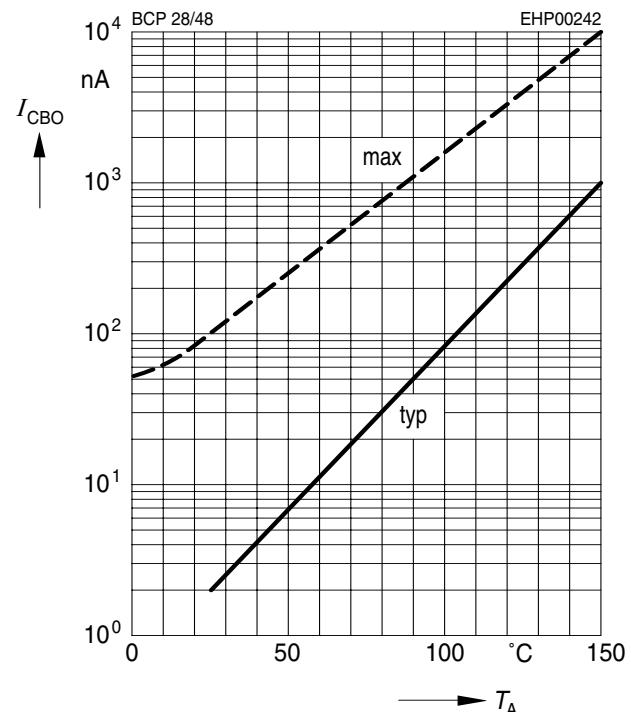


**Transition frequency**  $f_T = f(I_C)$

$V_{\text{CE}} = 5\text{V}$

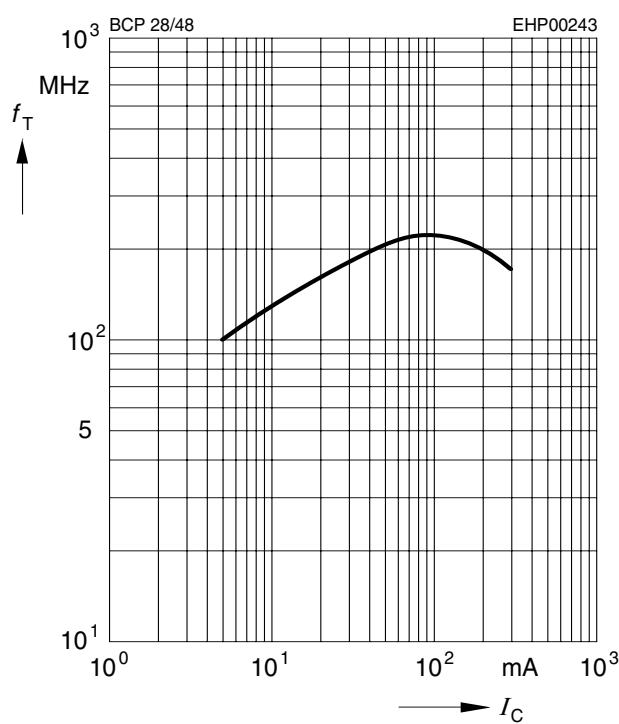


**Permissible pulse load**

$P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$

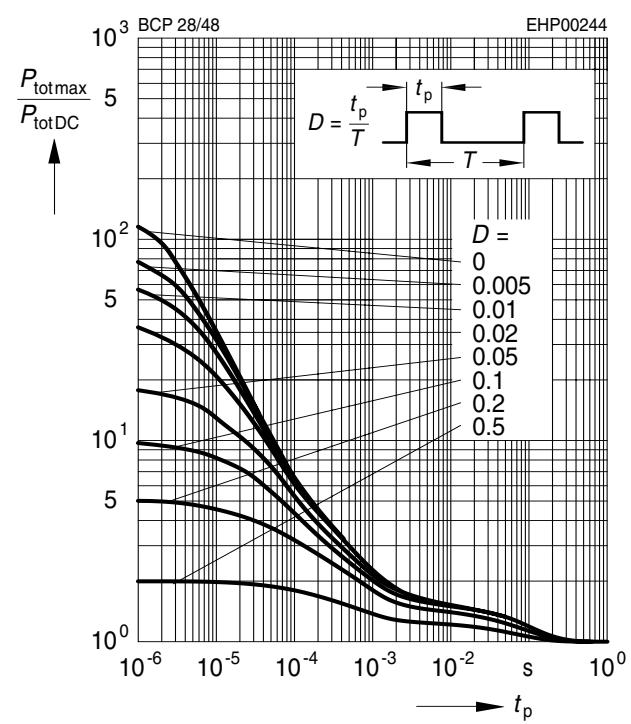


**DC current gain**  $h_{FE} = f(I_C)$

$V_{CE} = 5V$

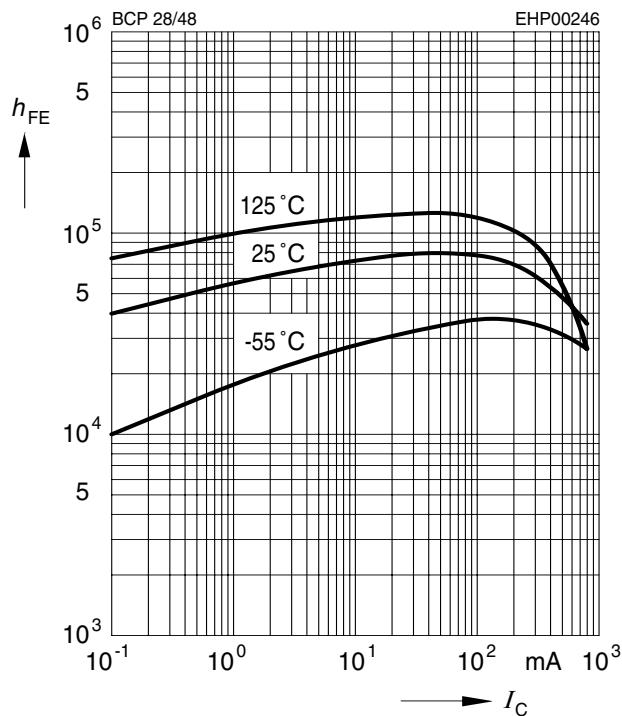


**Collector-emitter saturation voltage**

$I_C = f(V_{CEsat})$ ,  $h_{FE} = 1000$

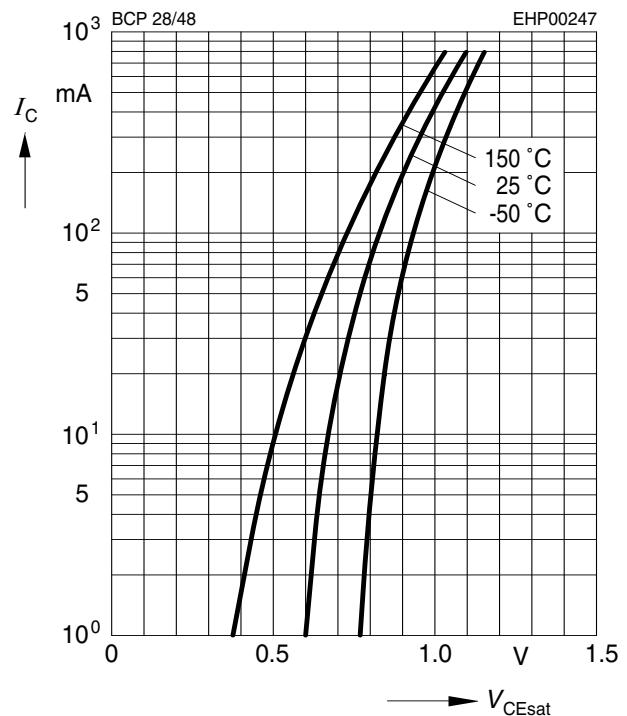

**Collector-base capacitance**  $C_{CB} = f(V_{CBO})$

**Emitter-base capacitance**  $C_{EB} = f(V_{EBO})$

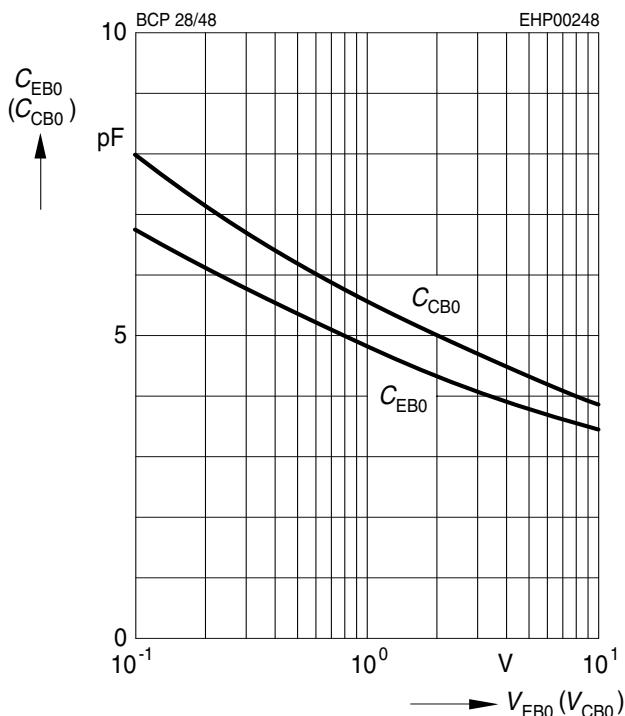

**Base-emitter saturation voltage**

$I_C = f(V_{BEsat})$ ,  $h_{FE} = 1000$

