

180° HYBRID MODEL SMJ-C6

WIDE BANDWIDTH


200 - 1200 MHz

SPECIFICATIONS

Operating Frequency:	200 - 1200 MHz	Amplitude Unbalance:	0.6 (Typ)/1.0 dB (Max)
Insertion Loss:	1.0 dB (Typ)/1.5 (Max)	VSWR :	1.5:1 (Typ)
Isolation:	19 dB (Typ)/15 dB (Min)	Impedance:	50 Ohms (Nom)
Phase Unbalance:	2.0° (Typ)/ 4.0° (Max)	Operating Temp. Range:	-40° to +85°C



MECHANICAL OUTLINE: 133

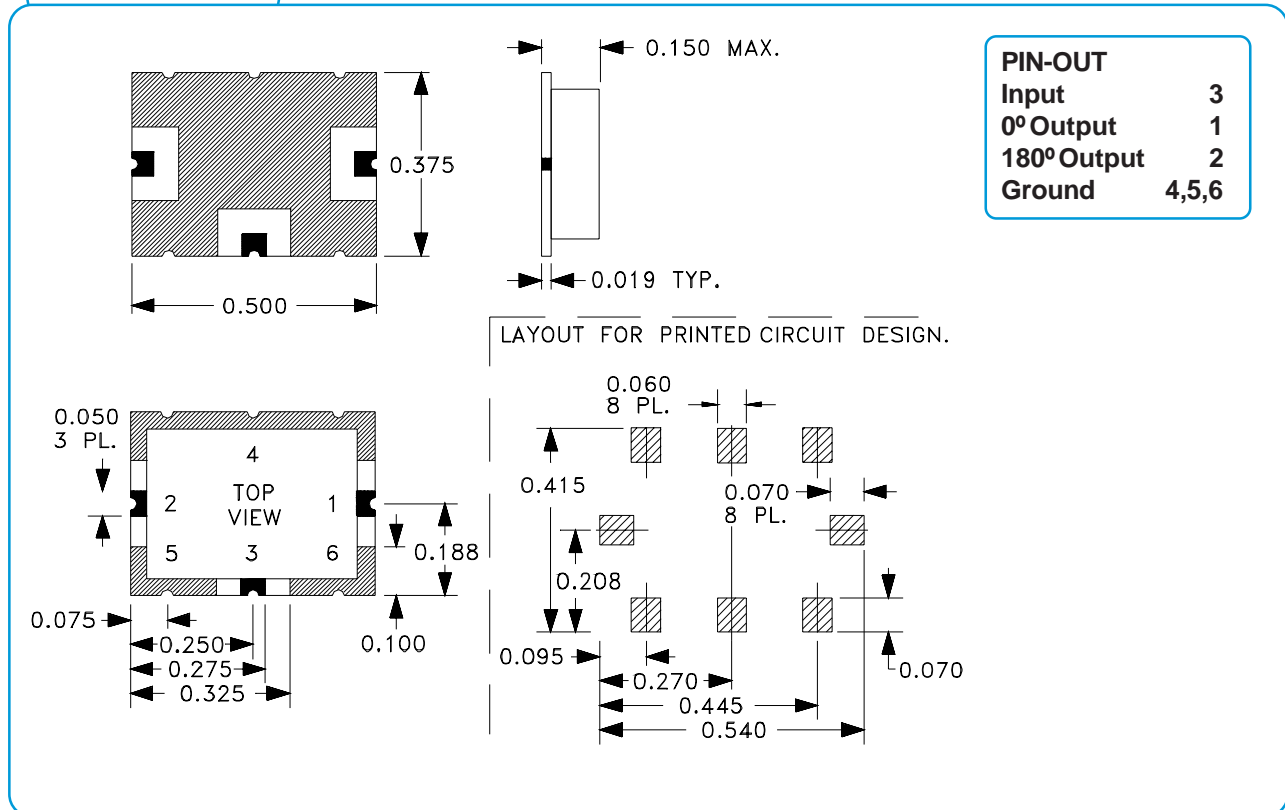

180° HYBRID MODEL SMJ-C6

WIDE BANDWIDTH

200 - 1200 MHz

PERFORMANCE PLOTS

