

## Molded Metal Film Resistors Low Temperature Coefficient, High Precision



The RCME range of metal film resistors represents a significant technical advancement in resistive technology, combining low temperature coefficients with high environmental stabilities, and high frequency performance.

Laser beam trimming gives tolerance accuracies from 0.1 % to 1 %.

The RCME range effectively bridges the gap that has hitherto existed between the high precision, high stability foil or wirewound technology and conventional film technology.

### FEATURES

- 0.125 W to 0.25 W at 85 °C
- Very low temperature coefficient:  $\pm 5$  ppm/°C and  $\pm 10$  ppm/°C
- Very tight tolerances: Down to  $\pm 0.1$  %
- Electrical insulation  $> 10^7$  M $\Omega$
- Climatic category - 65 °C/+ 155 °C /56 days
- Excellent frequency performance
- Termination = Pure matte tin
- Compliant to RoHS directive 2002/95/EC



DIMENSIONS in millimeters					
	SERIES	A	Ø B	Ø C	WEIGHT (g)
	RCME02	6.5 $\pm$ 0.2	2.4 $\pm$ 0.1	0.6	0.26
	RCME05	10.2 $\pm$ 0.2	3.65 $\pm$ 0.1	0.6	0.46

TECHNICAL SPECIFICATIONS		
VISHAY SFERNICE SERIES	RCME02	RCME05
Power Rating at 85 °C	0.125 W	0.25 W
Ohmic Range	100 $\Omega$ to 750 k $\Omega$	
Resistance Tolerance	$\pm 0.1$ %, $\pm 0.2$ %, $\pm 0.5$ %, $\pm 1$ %	
Nominal Temperature Coefficient in the Range - 20 °C to + 85 °C	K6 $\leq \pm 10$ ppm/°C K8 $\leq \pm 5$ ppm/°C	
Maximum Voltage	300 V	350 V
Insulation Resistance	$> 10^7$ M $\Omega$	
Voltage Coefficient	0.0001 %/V	
Environmental Specifications	- 65 °C/+ 155 °C/56 days	




Molded Metal Film Resistors  
Low Temperature Coefficient, High Precision


Vishay Sfernice

PERFORMANCE		
EN140-100		MAXIMUM VALUES AND DRIFTS
TESTS	CONDITIONS	
Load Life at Maximum Category Temperature	1000 h at + 155 °C/0 % of $P_n$	± 0.15 % or 0.05 Ω
Short Time Overload	2.5 $U_m/5$ s limited to 2 $U_n$	± 0.01 % or 0.05 Ω
Damp Heat Humidity (Steady State)	56 days with low load	± 0.15 % or 0.05 Ω
Rapid Temperature Change	- 55 °C + 155 °C	± 0.05 % or 0.05 Ω
Climatic Sequence	- 55 °C + 155 °C severity 1	± 0.15 % or 0.05 Ω Insulation resistance > 10 <sup>6</sup> MΩ
Terminal Strength	Pull - twist - 2 bends	± 0.05 % or 0.05 Ω
Vibration	Severity 55B	± 0.05 % or 0.05 Ω
Soldering (Thermal Shock)	+ 260 °C 10 s	± 0.05 % or 0.05 Ω
Load Life	Cycle 90'/30' 1000 h at $P_n$ at 85 °C	± 0.05 % or 0.05 Ω
Shelf Life	1 year ambient temperature	± 0.03 % or 0.05 Ω

POWER RATING

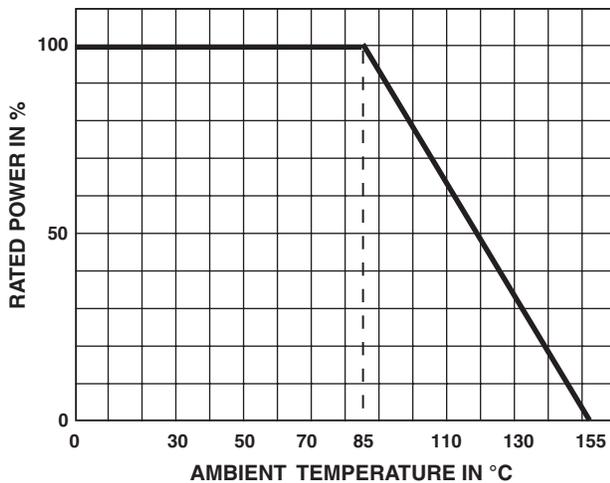

TEMPERATURE COEFFICIENT

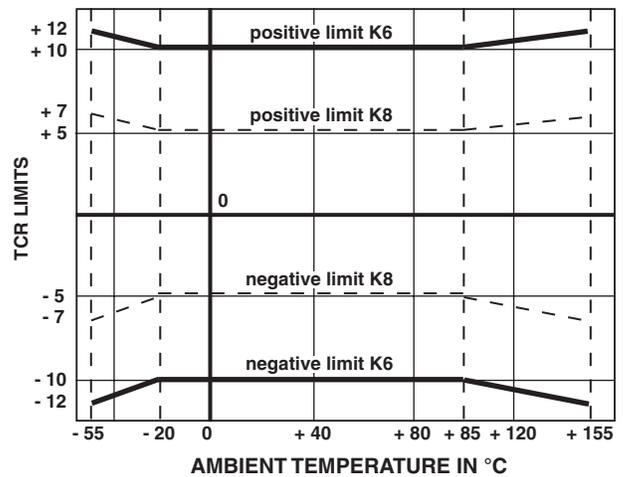

The temperature coefficient is guaranteed between - 20 °C to + 85 °C.


The limits of TCR are:

K 8 ± 5 ppm/°C and K 6 ± 10 ppm/°C

For use outside the range - 20 °C or + 85 °C, limiting values of temperature coefficient are given in the graph above.

**MARKING**

Printed: Vishay Sfernice trademark, series, style (in full or abbreviated), ohmic value (in  $\Omega$ ), tolerance (in %), temperature coefficient, manufacturing date.

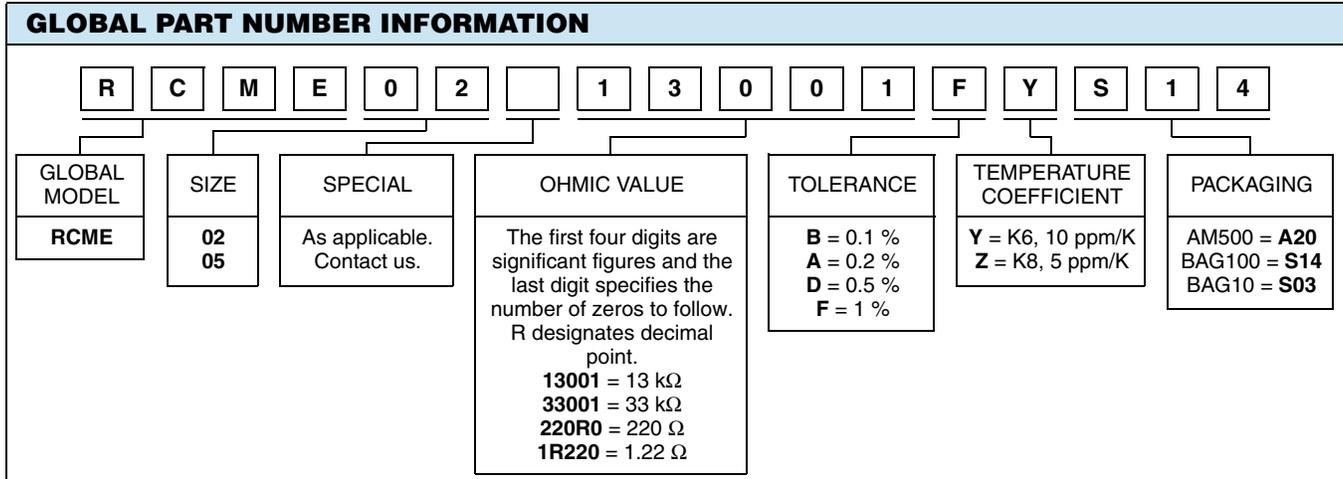



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.