

Fox *Rocks* Your Design World... *Again!!*

INTRODUCING

XPRESSO™

Not just a new oscillator family,
but a new oscillator technology!

**1 Picosecond
Phase Jitter!**



- *Low jitter/noise*
- *Low cost*
- *Reduced lead times*



Who says you can't have it all?

For a long time, the process of specifying and selecting oscillators for your equipment designs has involved balancing technical demands and practical considerations – in terms of physical performance, purchase cost, and delivery time. *Not any longer!*

The revolutionary new XpressO™ crystal oscillator family from Fox provides a wider range of options, with fewer compensating factors, shorter lead times, and reduced pricing. Instead of being faced with crucial tradeoffs in cost, performance, or delivery times, you can have virtually the best of all worlds in one package.



XPRESSO™

✓ *Great for your designs.*

If an oscillator can't deliver the performance you need in your design, it doesn't matter how much it costs. But Fox XpressO oscillators with patented new technologies (*including proprietary ASICs with noise reduction silicon architectures and proven production techniques*) deliver accurate performance over an extremely wide range of parameters – all at a lower cost than conventional oscillators! Call today to compare XpressO's low pricing for the following performance options:

- **The exact frequency you need**, from 0.750 MHz to 1.350 GHz
- **Stabilities** as tight as ± 20 ppm
- **Low jitter and phase noise** characteristics to meet your toughest needs*
- **Choice** of HCMOS, LVDS, and LVPECL versions for both XO and VCXO product families
- **3.3 V** available as standard
- **Choice** of 7 x 5 mm and 5 x 3.2 mm package sizes

✓ *Great for your business, too!*

Specifying the optimum oscillator for your design is only half the battle. Getting it delivered in time to meet the most pressing customer deadlines for engineering prototypes or full production models – without technical compromise and without paying a premium – can be the difference between a profitable contract and a lost opportunity.

This is where XpressO really lives up to its name, with:

- **Next day shipment** of samples for prototyping
- **Mere days** for lead times on production quantities
- **A new pricing structure** that, unlike conventional oscillators, won't penalize you for requesting quick turnaround on unique frequencies



ISO9000: 2000
Approved



* If you have specific jitter or phase noise requirements please contact Fox Technical Support for availability.



FOX
Rocks!
...for more than
25 years!

XpressO Selection & Description Guides

Crystal Oscillators (XO)



HCMOS – XO		
PACKAGE SIZE	5 x 3.2 mm	7 x 5 mm
SUPPLY VOLTAGE	3.3 V	3.3 V
MODEL	FXO-HC53	FXO-HC73
FREQUENCY RANGE	0.750 MHz ~ 250 MHz	0.750 MHz ~ 250 MHz
FREQUENCY STABILITY	± 20, 25, 50, 100 PPM	± 20, 25, 50, 100 PPM
TEMPERATURE RANGE	-20°C ~ +70°C R = -40°C ~ +85°C	-20°C ~ +70°C R = -40°C ~ +85°C



LVDS – XO		
PACKAGE SIZE	5 x 3.2 mm	7 x 5 mm
SUPPLY VOLTAGE	3.3 V	3.3 V
MODEL	FXO-LC53	FXO-LC73
FREQUENCY RANGE	0.750 MHz ~ 1.350 GHz	0.750 MHz ~ 1.350 GHz
FREQUENCY STABILITY	± 20, 25, 50, 100 PPM	± 20, 25, 50, 100 PPM
TEMPERATURE RANGE	-20°C ~ +70°C R = -40°C ~ +85°C	-20°C ~ +70°C R = -40°C ~ +85°C



LVPECL – XO		
PACKAGE SIZE	5 x 3.2 mm	7 x 5 mm
SUPPLY VOLTAGE	3.3 V	3.3 V
MODEL	FXO-PC53	FXO-PC73
FREQUENCY RANGE	0.750 MHz ~ 1.350 GHz	0.750 MHz ~ 1.350 GHz
FREQUENCY STABILITY	± 20, 25, 50, 100 PPM	± 20, 25, 50, 100 PPM
TEMPERATURE RANGE	-20°C ~ +70°C R = -40°C ~ +85°C	-20°C ~ +70°C R = -40°C ~ +85°C

Example: FXO-PC536R 212.500 MHz = LVPECL Output, Ceramic 5 x 3.2 mm Package, 3.3V, ±25 PPM Stability, -40 to +85°C Temperature Range, at 212.500 MHz

VCXOs


HCMOS – VCXO		
PACKAGE SIZE	5 x 3.2 mm	7 x 5 mm
SUPPLY VOLTAGE	3.3 V	3.3 V
MODEL	FVXO-HC53	FVXO-HC73
FREQUENCY RANGE	0.750 MHz ~ 250 MHz	0.750 MHz ~ 250 MHz
PULLABILITY (APR)	B = ± 50 PPM	B = ± 50 PPM
TEMPERATURE RANGE	-20°C ~ +70°C R = -40°C ~ +85°C	-20°C ~ +70°C R = -40°C ~ +85°C

LVDS – VCXO		
PACKAGE SIZE	5 x 3.2 mm	7 x 5 mm
SUPPLY VOLTAGE	3.3 V	3.3 V
MODEL	FVXO-LC53	FVXO-LC73
FREQUENCY RANGE	0.750 MHz ~ 1.350 GHz	0.750 MHz ~ 1.350 GHz
PULLABILITY (APR)	B = ± 50 PPM	B = ± 50 PPM
TEMPERATURE RANGE	-20°C ~ +70°C R = -40°C ~ +85°C	-20°C ~ +70°C R = -40°C ~ +85°C


LVPECL – VCXO		
PACKAGE SIZE	5 x 3.2 mm	7 x 5 mm
SUPPLY VOLTAGE	3.3 V	3.3 V
MODEL	FVXO-PC53	FVXO-PC73
FREQUENCY RANGE	0.750 MHz ~ 1.350 GHz	0.750 MHz ~ 1.350 GHz
PULLABILITY (APR)	B = ± 50 PPM	B = ± 50 PPM
TEMPERATURE RANGE	-20°C ~ +70°C R = -40°C ~ +85°C	-20°C ~ +70°C R = -40°C ~ +85°C

Example: FVXO-HC73BR 155.520 MHz = HCMOS Output, Ceramic 7 x 5 mm Package, 3.3 V, ±50 PPM APR, -40 to +85°C Temperature Range, at 155.520 MHz

XpressO XO Model Description Guide

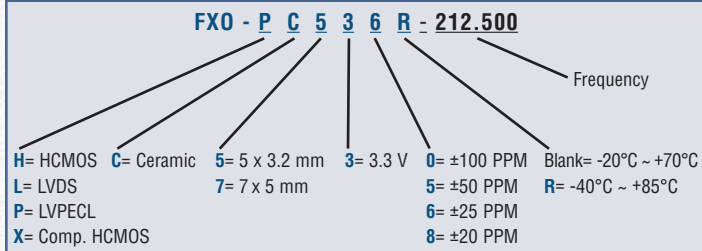

XpressO VCXO Model Description Guide

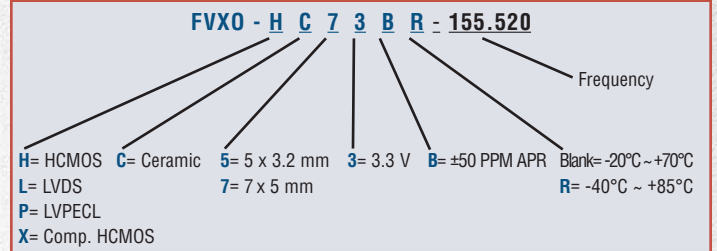


XpressO Jitter Characteristics

Unlike programmable oscillators, the jitter and noise characteristics of XpressO configurable oscillators are comparable to or better than those of fixed frequency oscillators in virtually all applications. You can choose the XpressO oscillator that's ideal for your specific application.

	MHz	Phase pS (RMS)	TIE pS (RMS)	Rj pS (RMS)	Dj pS (Mean)	Tj (Dj+14 Rj)
HCMOS	62.50	0.93	3.7	0.9	7.4	20.4
	106.25	0.85	3.6	1.0	7.7	21.7
	125.00	0.73	2.8	0.8	7.5	19.1
	156.25	0.89	3.3	0.9	7.6	20.4
LVDS	106.25	0.83	3.5	0.7	7.1	17.2
	156.25	1.19	3.6	1.3	5.8	23.6
	212.50	0.89	3.9	0.9	6.7	18.7
LVPECL	622.08	0.99	3.2	1.1	5.3	20.7
	62.50	0.77	3.0	1.3	7.0	24.9
	155.52	0.92	3.5	1.3	9.9	28.7
	156.25	0.96	3.4	1.4	9.1	28.7
	212.50	1.05	3.8	1.2	9.3	26.3
	312.50	0.98	3.8	1.3	8.3	26.4
	622.08	0.96	3.1	1.2	8.5	25.1


XpressO Package Dimensions, Marking & Labeling

Dimensions, marking patterns and product labeling for the two currently available Fox XpressO packages are shown below.

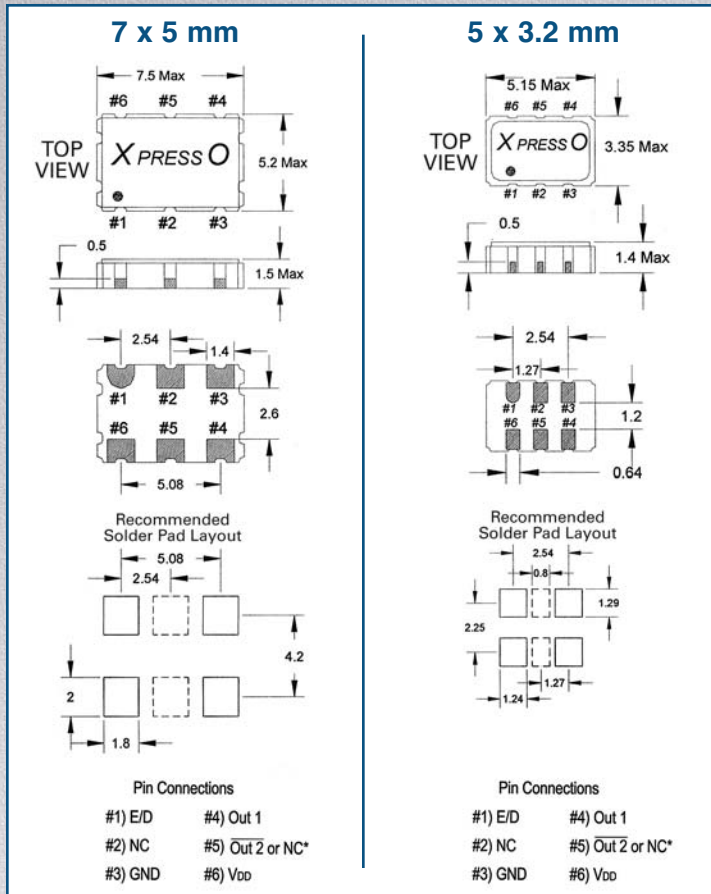

* Out 2 for LVPECL, LVDS, and complimentary HCMOS. NC for single ended HCMOS. Pad 2 & 5 are optional for the single ended HCMOS

Typical XpressO marking configurations are illustrated below. Note that in all cases, Pin 1 is designated by either the Fox Head or a dot.

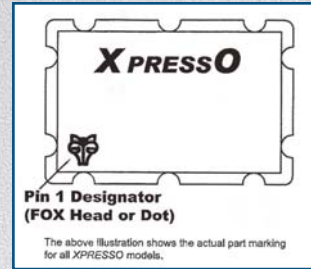

To help minimize both cost and lead times, XpressO packages are supplied with a separate label containing necessary product and production information, as shown below.



Learn More About The New Fox XpressO Family of Oscillators...

To learn more about the performance and business advantages of Fox XpressO oscillators, call us today at 888-GET-2-FOX (888-438-2369). Or visit us on line at www.foxonline.com for complete specifications and the industry's most comprehensive range of frequency control solutions.

Fox Electronics has a staff of application specialists ready to help you. Contact our technical support staff – www.foxonline.com/email.htm



FOX Electronics

We're On Your Frequency.



Worldwide Corporate Headquarters
5570 Enterprise Parkway
Fort Myers, FL 33905
Tel: 888-GET-2-FOX
Fax: 1-239-693-1554
(Outside U.S.)
+1 (239) 693-0099
www.foxonline.com/email.htm

Fox Electronics EMEA
14 Banks Road
Biggleswade
Bedfordshire, SG180DY, UK
Tel/Fax: +44.1767.312632
www.foxonline.com/email.htm

Fox Electronics Asia
4/F Gold & Silver
Commercial Building
12-18 Mercer St.
Central, Hong Kong
Tel: +852 2854 4285
Fax: +852 2854 4282
www.foxonline.com/email.htm

Fox Electronics Taiwan
12F-6,378 Ming An West Road
Hsin-Chuang, Taipei Hsien 242
Taiwan, R.O.C.
Tel: +886-2-22073427
Fax: +886-2-22073486
www.foxonline.com/email.htm

Fox Electronics Japan
3-28-6, Yoyogi
Yamaki Bldg, 1F
Shibuya-ku Tokyo 151, Japan
Tel: +81 (3) 3374 2079
Fax: +81 (3) 3374 5221
www.foxonline.com/email.htm