


ROV20H220M-S-2 Product Details

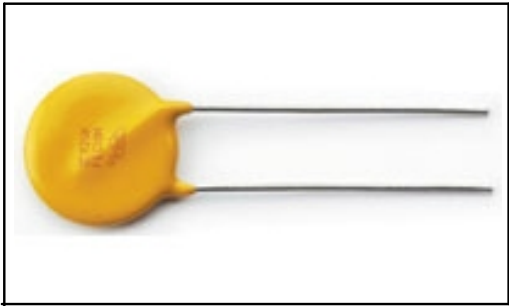

ROV20H220M-S-2

TE Internal Number: A98342-000

 [Active](#)

Radial-leaded Metal Oxide Varistor (ROV)

[Always EU RoHS/ELV Compliant](#) ([Statement of Compliance](#))

Product Highlights:

- High Surge Series
- Diameter = 20.00 mm
- Varistor Voltage Rating = 22 VDC
- Allowable Voltage, Max. = 14 VAC
- Allowable Voltage, Max. = 18 VDC

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

 [Add to My Part List](#)

 [Request Sample](#)

 [Find Similar Products](#)

 [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- [ROV20, ROV20H, ROV20E 20mm Series Metal Oxide Varistors](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Electrical Characteristics:

- [Varistor Voltage Rating \(VDC\)](#) = 22
- [Allowable Voltage, Max. \(VAC\)](#) = 14
- [Allowable Voltage, Max. \(VDC\)](#) = 18
- [Clamping Voltage, Max. \(VDC\)](#) = 43
- [Surge Current \(8x20 ?s\), Max. \(Amps.\)](#) = 3000
- Varistor Voltage Tolerance (%) = 20
- Rated Wattage (W) = 0.2
- Energy (10x1000 ?s) (Joule) = 16
- Capacitance (pF) = 21,200

Body Related Features:

- [Series](#) = High Surge

Configuration Related Features:

- [Diameter \(mm \[in\]\)](#) = 20.00 [0.787]

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Other:

- Brand = Raychem