

**SUPER FAST
GLASS PASSIVATED RECTIFIERS**

REVERSE VOLTAGE - **200** Volts
FORWARD CURRENT - **1.0** Ampere


FEATURES

- Glass passivated chip
- Super fast switching time for high efficiency
- Low forward voltage drop and high current capability
- Low reverse leakage current
- Plastic material has UL flammability classification 94V-0

MECHANICAL DATA

- Case : JEDEC DO-41 molded plastic
- Polarity : Color band denotes cathode
- Weight : 0.012 ounces, 0.34 grams
- Mounting position : Any

DO-41

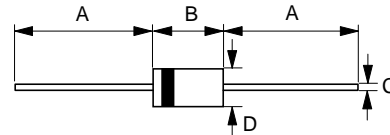

DO-41		
Dim.	Min.	Max.
A	25.4	-
B	4.10	5.20
C	0.71 \varnothing	0.86 \varnothing
D	2.00 \varnothing	2.70 \varnothing

All Dimensions in millimeter

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	MUR120	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	200	V
Maximum RMS Voltage	VRMS	140	V
Maximum DC Blocking Voltage	VDC	200	V
Maximum Average Forward Rectified Current @TL=130°C	I(AV)	1.0	A
Peak Forward Surge Current 8.3ms single half sine-wave super imposed on rated load (JEDEC Method)	IFSM	35	A
Maximum forward Voltage at IF 1.0A DC @TJ=25°C @TJ=150°C	VF	0.875 0.710	V
Maximum DC Reverse Current at Rated DC Blocking Voltage @TJ=25°C @TJ=150°C	IR	2 50	uA
Reverse Recovery Time (Note 1)	TRR	25	ns
Typical Junction Capacitance (Note 2)	CJ	27	pF
Typical Thermal Resistance (Note 3)	RθJL	50	°C/W
Operating Temperature Range	TJ	-55 to +150	°C
Storage Temperature Range	TSTG	-55 to +150	°C

NOTES : 1.Measured with IF=0.5A,IR=1A,IRR=0.25A.
2.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
3.Thermal Resistance Junction to Lead.

REV. 1-PRE, 01-Dec-2000, KDGC03

