

MUR3020WT, MUR3060WT

Preferred Devices

SWITCHMODE™ Power Rectifiers

... designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- Ultrafast 35 and 60 Nanosecond Recovery Time
- 175°C Operating Junction Temperature
- Popular TO-247 Package
- High Voltage Capability to 600 Volts
- Low Forward Drop
- Low Leakage Specified @ 150°C Case Temperature
- Current Derating Specified @ Both Case and Ambient Temperatures
- Epoxy Meets UL94, V_O @ 1/8"
- High Temperature Glass Passivated Junction

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 4.3 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 30 units per plastic tube
- Marking: U3020, U3060

MAXIMUM RATINGS



Please See the Table on the Following Page



ON Semiconductor™


<http://onsemi.com>

**ULTRAFAST
RECTIFIERS
30 AMPERES
200-600 VOLTS**

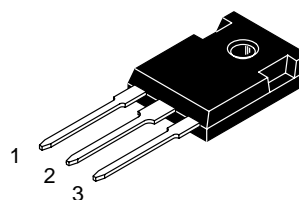

TO-247 PSI
CASE 340L
PLASTIC

MARKING DIAGRAM

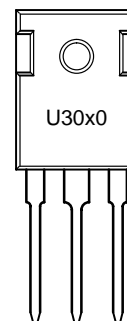

U30x0 = Device Code
x = 2 or 6

ORDERING INFORMATION

Device	Package	Shipping
MUR3020WT	TO-247	30 Units/Rail
MUR3060WT	TO-247	30 Units/Rail

Preferred devices are recommended choices for future use and best overall value.

MUR3020WT, MUR3060WT

MAXIMUM RATINGS (Per Leg)

Rating	Symbol	MUR3020WT	MUR3060WT	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	600	Volts
Average Rectified Forward Current @ 145°C Total Device	$I_{F(AV)}$	15 30		Amps
Peak Repetitive Surge Current (Rated V_R , Square Wave, 20 kHz, $T_C = 145^\circ\text{C}$)	I_{FM}	30		Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions, halfwave, single phase, 60 Hz)	I_{FSM}	200	150	Amps
Operating Junction and Storage Temperature	T_J, T_{stg}	- 65 to +175		°C

THERMAL CHARACTERISTICS (Per Leg)

Maximum Thermal Resistance — Junction to Case — Junction to Ambient	$R_{\theta JC}$ $R_{\theta JA}$	1.5 40		°C/W
--	------------------------------------	-----------	--	------

ELECTRICAL CHARACTERISTICS (Per Leg)

Maximum Instantaneous Forward Voltage (Note 1.) ($I_F = 15$ Amp, $T_C = 150^\circ\text{C}$) ($I_F = 15$ Amp, $T_C = 25^\circ\text{C}$)	V_F	0.85 1.05	1.4 1.7	Volts
Maximum Instantaneous Reverse Current (Note 1.) (Rated DC Voltage, $T_J = 150^\circ\text{C}$) (Rated DC Voltage, $T_J = 25^\circ\text{C}$)	i_R	500 10	1000 10	μA
Maximum Reverse Recovery Time ($i_F = 1.0$ A, $di/dt = 50$ Amps/ μs)	t_{rr}	35	60	ns

1. Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$.

MUR3020WT, MUR3060WT

MUR3020WT


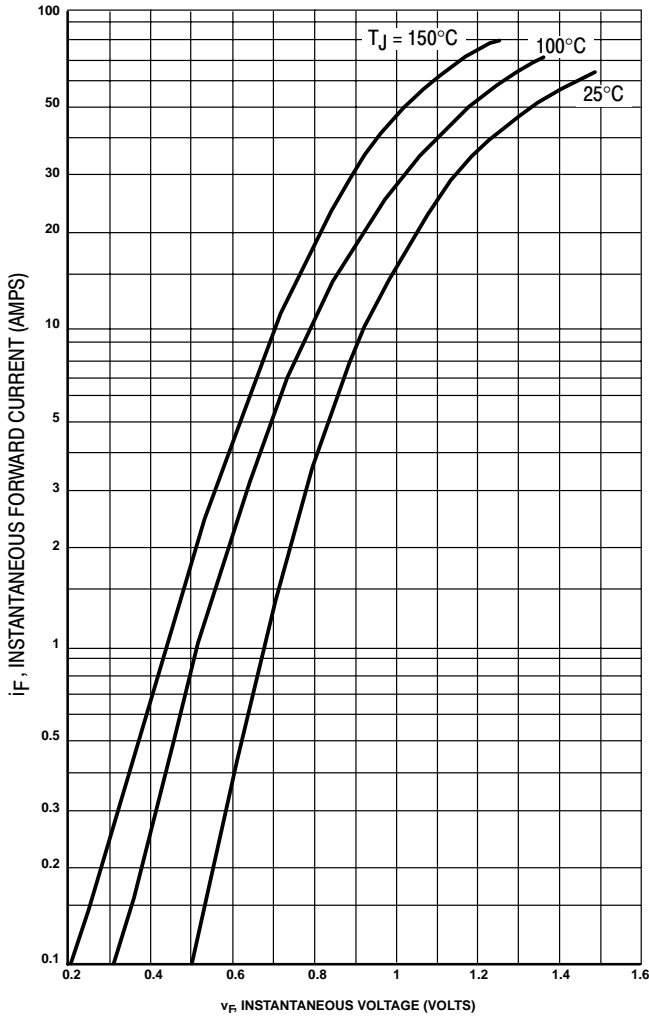


Figure 1. Typical Forward Voltage (Per Leg)

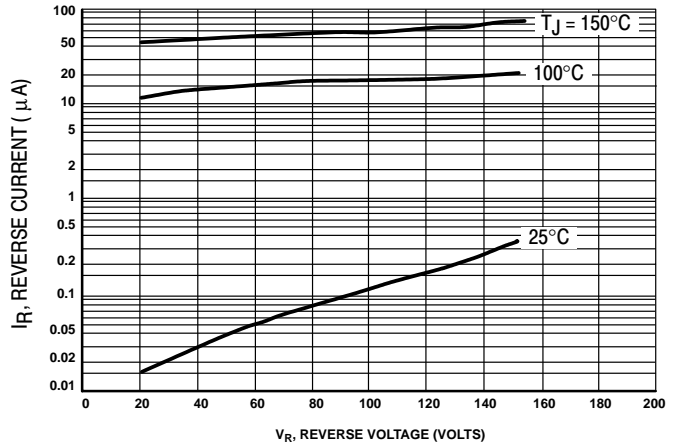

*The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if V_R is sufficiently below rated V_R .

Figure 2. Typical Reverse Current (Per Leg)*

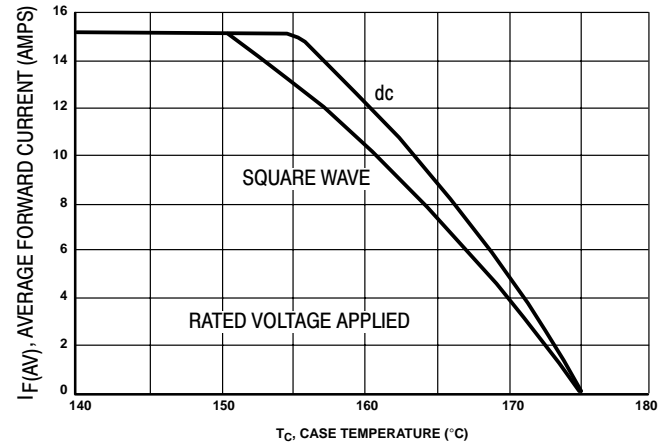


Figure 3. Current Derating, Case (Per Leg)

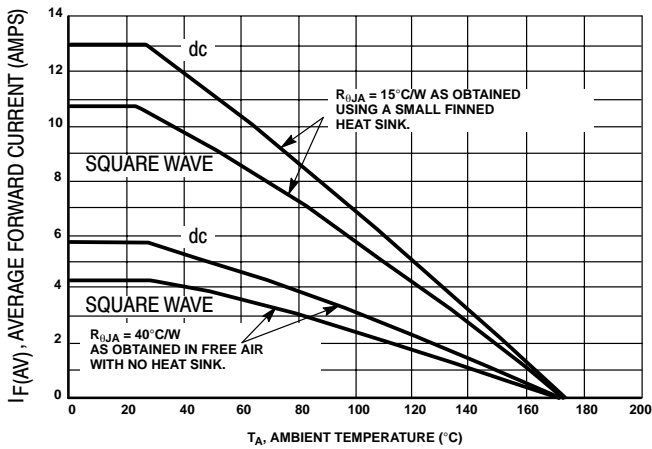


Figure 4. Current Derating, Ambient (Per Leg)

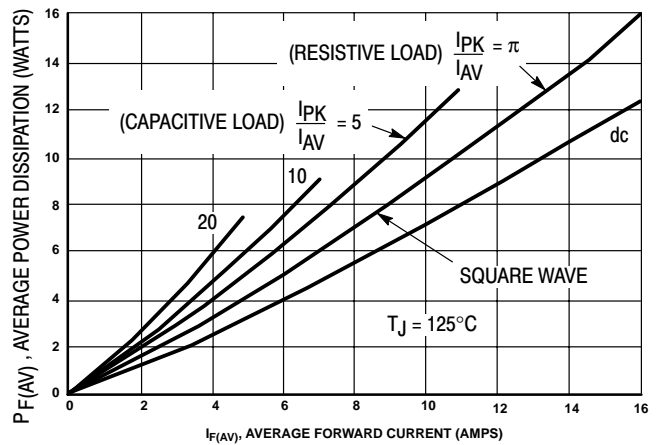


Figure 5. Power Dissipation (Per Leg)

MUR3060WT


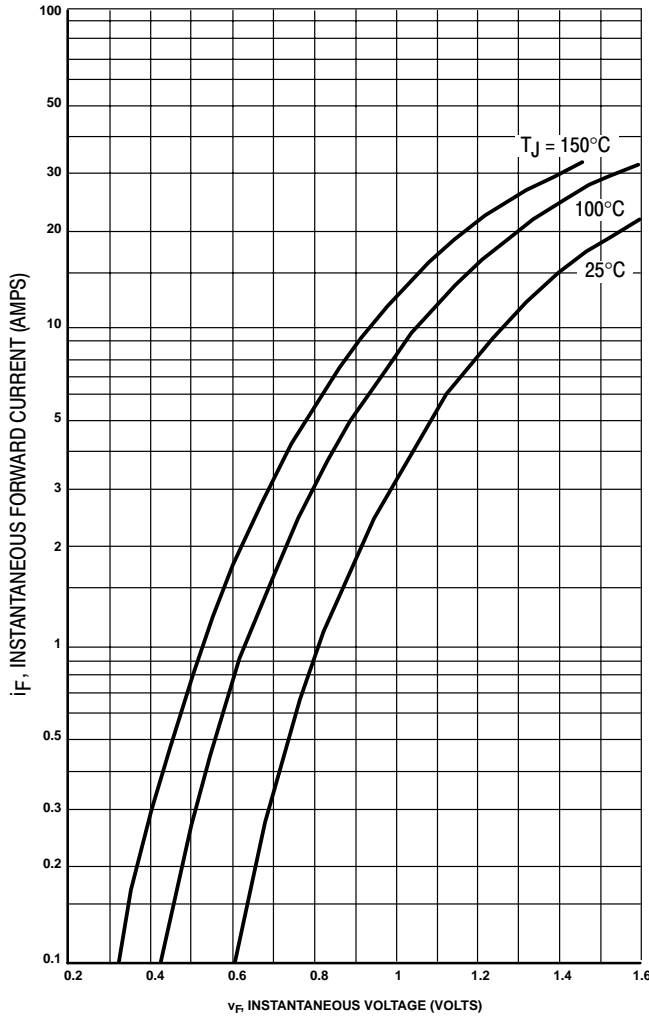


Figure 6. Typical Forward Voltage (Per Leg)

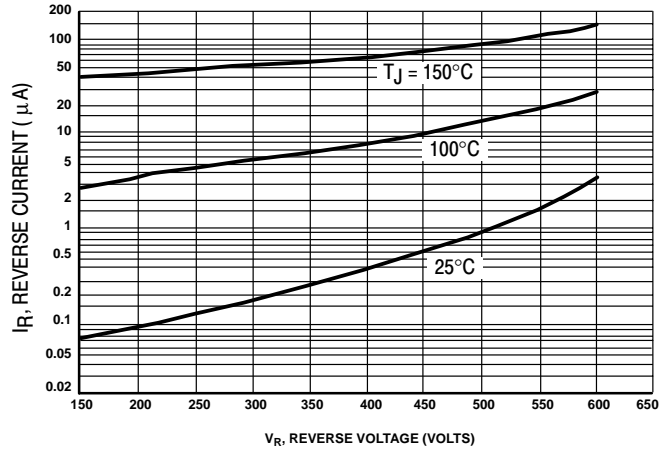

*The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if V_R is sufficiently below rated V_R .

Figure 7. Typical Reverse Current (Per Leg)*

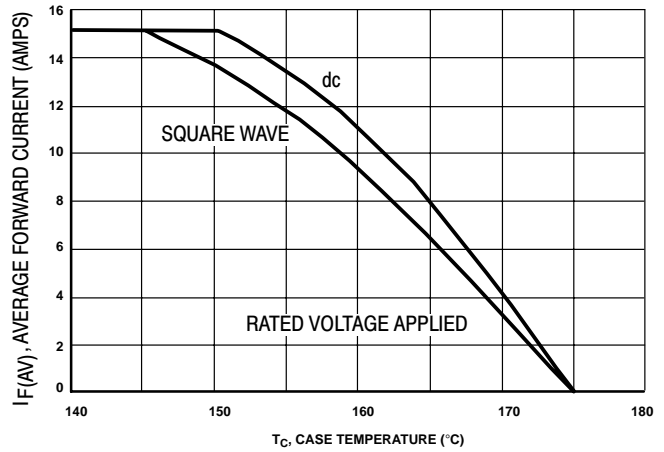


Figure 8. Current Derating, Case (Per Leg)

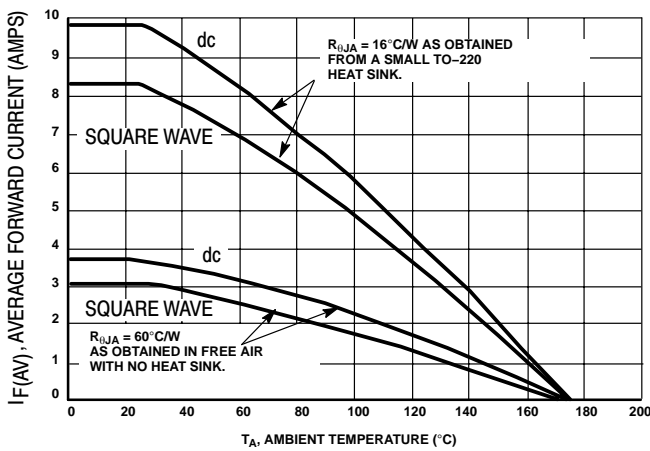


Figure 9. Current Derating, Ambient (Per Leg)

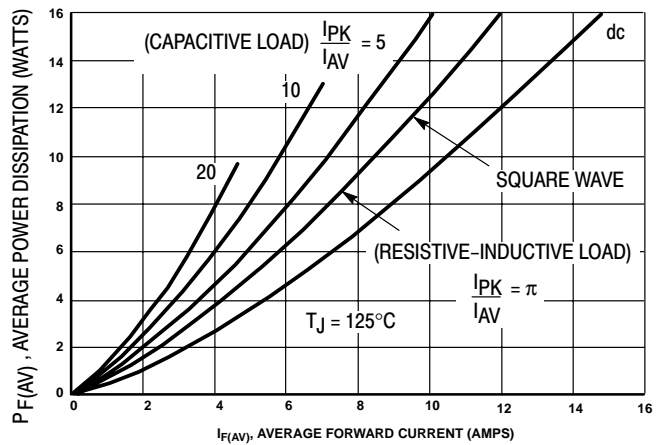


Figure 10. Power Dissipation (Per Leg)

MUR3020WT, MUR3060WT

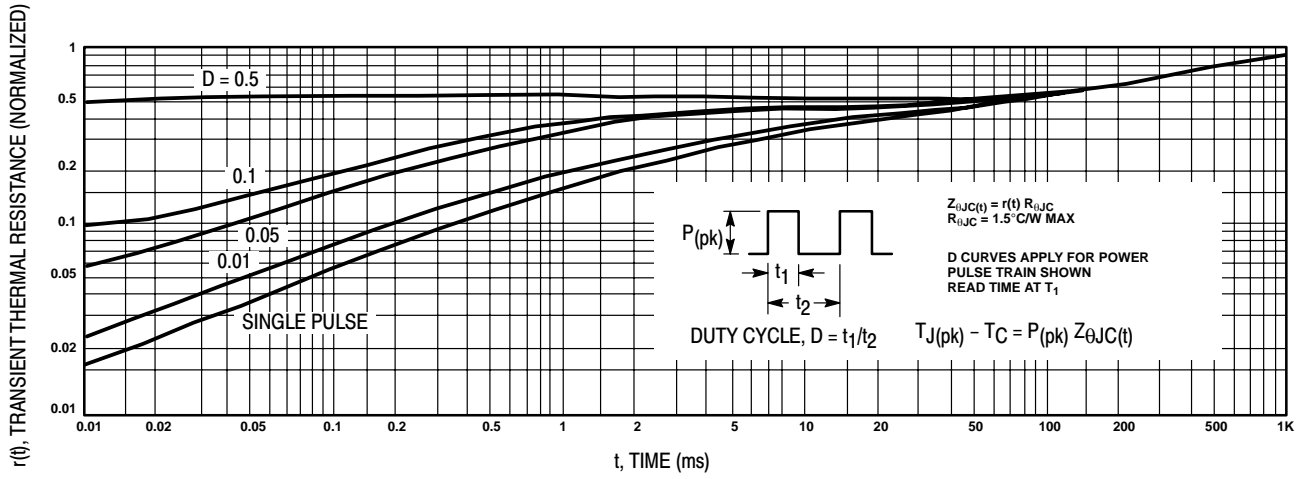


Figure 11. Thermal Response

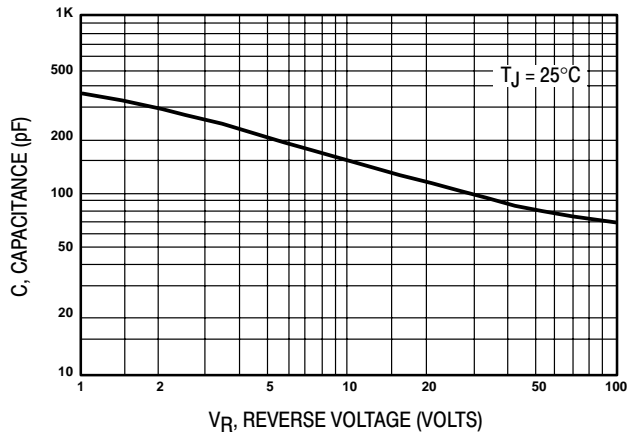


Figure 12. Typical Capacitance (Per Leg)