

Fuse Links for Solar Panel Applications

String Protection Fuse Links 1A to 15A 1000Vdc

PV Fuses



Standards/Approvals: IEC 60269

Description: A range of fuse links in a 10x38mm package specifically designed for the protection and isolation of photovoltaic strings. The fuse links are capable of interrupting low overcurrents associated with faulted PV (reverse current, multi-array fault) string arrays.

Catalogue Symbol: PV-(amp rating)A10F
 PV-(amp rating)A10-T
 PV-(amp rating)A10-1P
 PV-(amp rating)A10-2P

Class of Operation: gPV-fuse-links

Packaging: MOQ: 10
 Packaging 100% recyclable


Fuse Holders: PCB Clip: 1A3400-09
 Modular fuse holder:
 CHPV1 (1-pole non-indicating)
 CHPV1I (1-pole neon indicating)
 Fuse Block: BM603xPQ*

Technical Data:
 PV fuse-links
 Rated voltage: 1000Vdc
 Amps: 1A to 6A, 8A, 10A, 12A and 15A
 Rated breaking capacity: 33kAdc
 Min Interrupting Rating: $1.3 \times I_n$

* self certified for 1000Vdc

PV Fuse Coordination w/: Thin film cells and 4", 5" and 6" crystalline silicon cells.
 Time Constant: Under 1 ms

Dimensions - mm

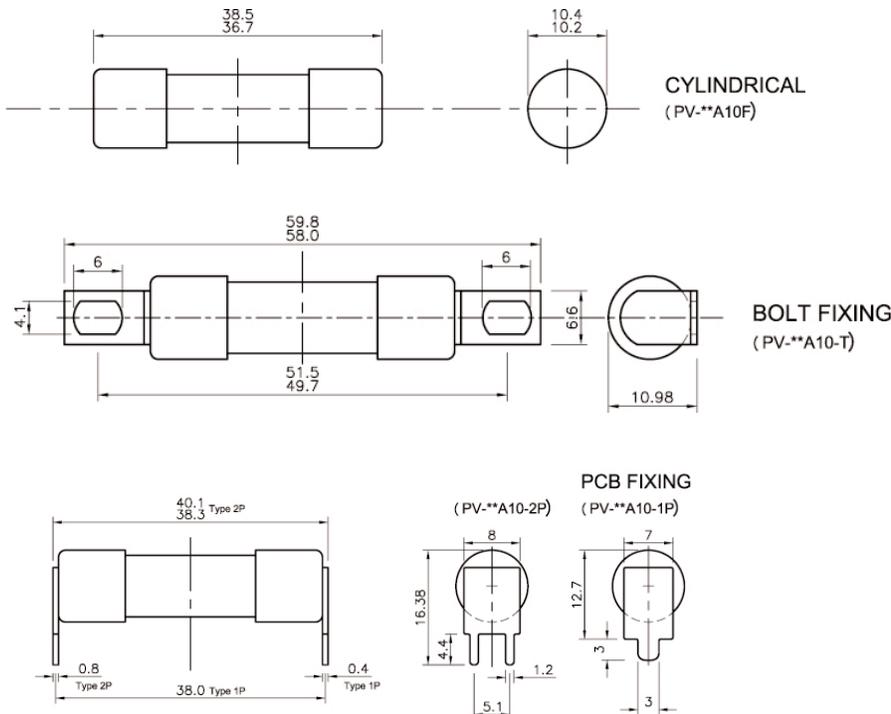

Fuse Links for Solar Panel Applications


String Protection Fuse Links 1A to 15A 1000Vdc

PV Fuses

Technical Data

Part Number	Current Rating (Amps)	Energy Integrals I^2t (A ² s)		Power Loss (watts)	
		Pre-Arcing	Total at 1000V	0.8 I ⁿ	I ⁿ
PV-1A10F	1	0.15	0.4	0.8	1.5
PV-2A10F	2	1.2	3.4	0.6	1.0
PV-3A10F	3	4	11	0.8	1.3
PV-4A10F	4	9.5	26	1.0	1.3
PV-5A10F	5	19	50	1.0	1.6
PV-6A10F	6	30	90	1.1	1.8
PV-8A10F	8	3	32	1.2	2.1
PV-10A10F	10	7	70	1.3	2.3
PV-12A10F	12	12	120	1.5	2.7
PV-15A10F	15	22	220	1.7	2.9

Time-Curent Characteristics

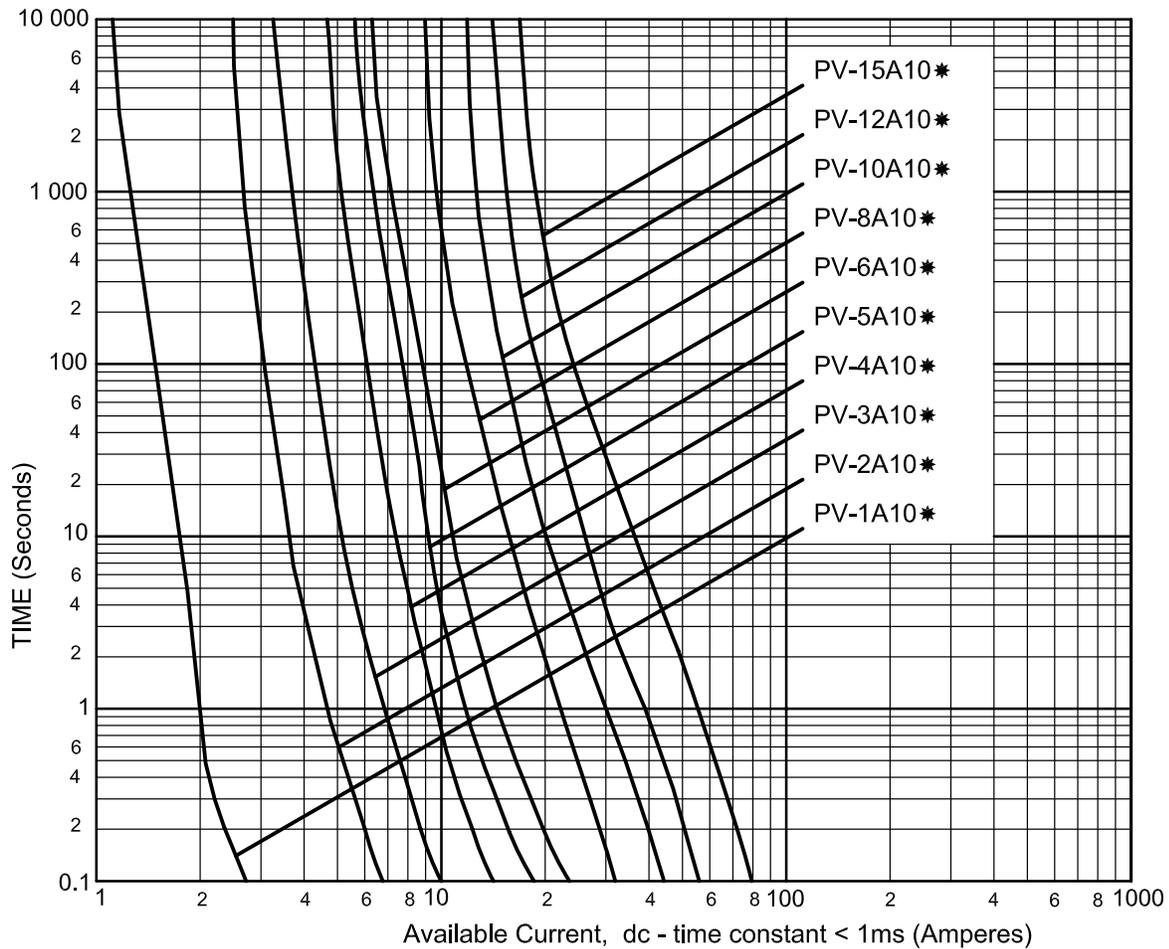

Temperature Derating

