


RoHS



K200PX Series

2.0MM Pin Header Single Row

Features

- Offered as Right angle or Straight Header
- 0.079" spacing for real estate savings
- Multiple stack height options
- Circuit sizes range from 2-40

Performance Specifications

Material and Finish

Housing : High Temp plastic (UL94V-0)

Contact : Copper Alloy

Plated : Gold Plated

Electrical Characteristics

Current Rating : 2.0A AC/DC


Voltage Rating : 250V AC/DC

Resistance : 20m ohm.max.

Insulation Resistance : 1000M ohm.Min.

Withstanding Voltage : 500V AC for one minute

Operating Temperature Range : -40°C to +105°C

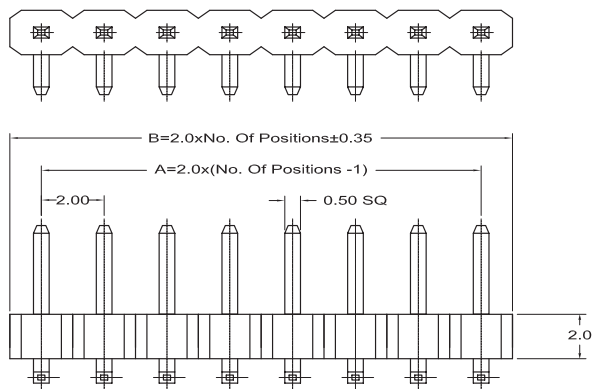


2.0MM Pin Header Single Row

K200PX Series

Documentation & Ordering Information

Kycon Part #

Part Number Builder



Series

K200PX - 2.0 Pin Header Single Row

Style



R1 - Right Angle

S1 - Straight Type


Number of Contacts

Contacts	A	B	Contacts	A	B	Contacts	A	B	Contacts	A	B
02	2.0	4.0	12	22.0	24.0	22	42.0	44.0	32	62.0	64.0
03	4.0	6.0	13	24.0	26.0	23	44.0	46.0	33	64.0	66.0
04	6.0	8.0	14	26.0	28.0	24	46.0	48.0	34	66.0	68.0
05	8.0	10.0	15	28.0	30.0	25	48.0	50.0	35	68.0	70.0
06	10.0	12.0	16	30.0	32.0	26	50.0	52.0	36	70.0	72.0
07	12.0	14.0	17	32.0	34.0	27	52.0	54.0	37	72.0	74.0
08	14.0	16.0	18	34.0	36.0	28	54.0	56.0	38	74.0	76.0
09	16.0	18.0	19	36.0	38.0	29	56.0	58.0	39	76.0	78.0
10	18.0	20.0	20	38.0	40.0	30	58.0	60.0	40	78.0	80.0
11	20.0	22.0	21	40.0	42.0	31	60.0	62.0			

Plating

G - Gold

Contact Kycon for more options

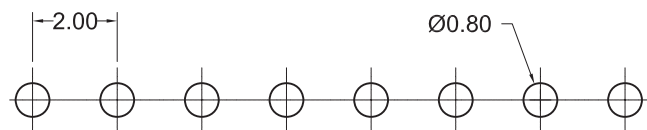

PCB Layout Reference