

1	Model
	PCL1904 Right Angle
	PCLR190N ^[1] Right Angle

TO ORDER, FOLLOW THE EXAMPLE:

Select one **BOLD** component from each SHADED column in the tables below.


1	Model	2	LED
	PCLR1904		-LG

→ Part Number **PCLR1904-LG**


2

STANDARD INTENSITY - DIFFUSED ENCAPSULATION				
LED	Color	λ_{pk} (nm)	$I_v^{[2]}$ (mcd)	Viewing Angle
-LR	RED	635	12	60
-LA	AMB	585	12	60
-LG	GRN	565	12	60


MEDIUM INTENSITY - TINTED ENCAPSULATION				
LED	Color	λ_{pk} (nm)	$I_v^{[2]}$ (mcd)	Viewing Angle
-LCR	RED	635	60	30
-LCA	AMB	585	60	30
-LCG	GRN	565	60	30

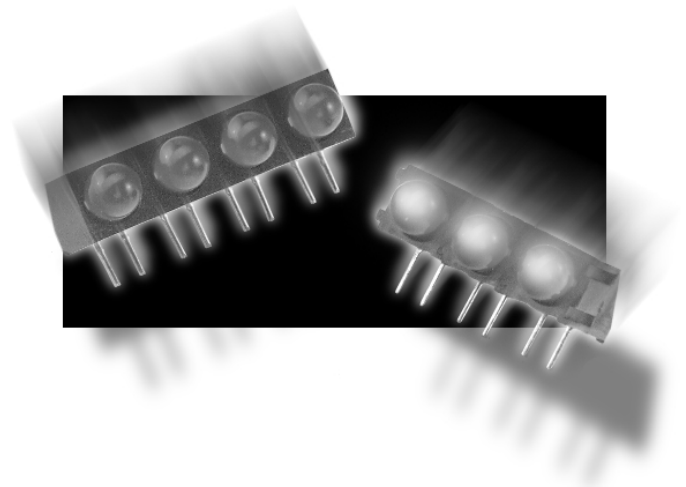

PCL1904

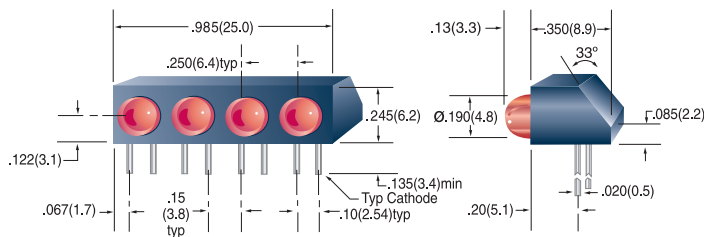

PCLR1903

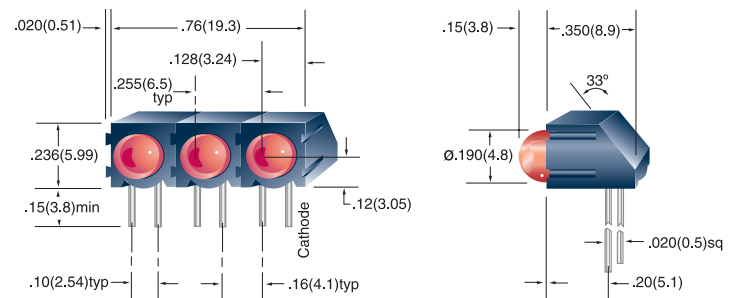

[1] Replace "N" with the number of LEDs in the array, 2 – 4 (e.g. PCLR1903).

[2] I_v = typical luminous intensity @ I_f = 20mA (T_a = 25°C).

All dimensions are in inches (mm)

Tolerances: .xx"(.x) ±.025"(.63) / .xxx"(.xx) ±.010"(.25)

Specifications are subject to change without notice.