


Pre-Connectorized Multi-Fiber Cable

As leaders in the fiber optic assembly market, 3M continues to fulfill the changing needs of the industry with the provision of pre-terminated multi-fiber cables. Pre-connectorized Cable Assemblies are used in applications such as intra-building networks and military field applications.

Pre-connectorized Multi-Fiber Cables are factory terminated at one or both ends with the customer's choice of connectors. These single-mode assemblies are tested to meet specific fiber connector requirements in response to customer demand as per their application.

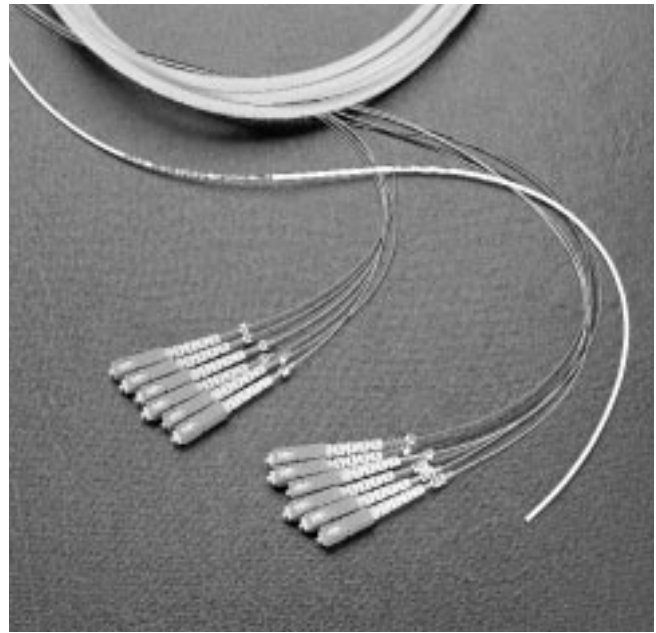

8

Pre-connectorized, Multi-Fiber Cable Assembly Ordering Chart
The part number for the Pre-connectorized Multi-fiber Cable is determined using a system similar to the system used for other 3M™ Cable Assemblies.

□ □ □ □ - □ □ □ □ □

Cable Assembly Information
A Single-mode 3M supplied connector and cable

Cable Lengths
0010 10 meters
20.5 20.5 meters
0025 25 meters

Connector End #1

Single-Mode

AM ST* (Bayonet)
DA SC
EP SC Angle
EN FC/PC
EU FC 8° Angle (2.15 mm key)
EX FC 8° Angle (2.0 mm key)

Note: All ST*, SC and FC connectors have PC finish.

Connector End #2
Use same codes as End #1
00 Pigtail

Cable 1 Single-mode 900 μm sub-units

EA 4 fiber
EB 6 fiber
GY 12 fiber
EC 24 fiber
ED 36 fiber
EE 72 fiber

2.4 mm sub-units

GJ 6 fiber
FW 12 fiber

All cables listed are OFNR riser-rated. For plenum cable, please call Customer Service. Pre-connectorized Multi-Fiber pigtail assemblies must be ordered in multiples of two for the same cable code.