


Broadband Product Line

AMPF-107MDA

Modulator Driver Amplifier

ADVANCED DATA SHEET

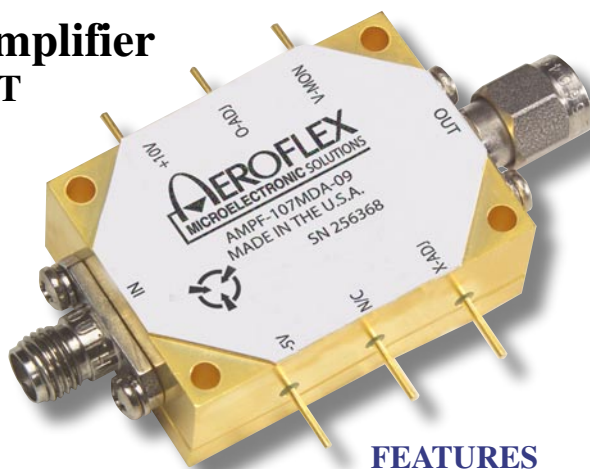

DESCRIPTION

Aeroflex Microelectronic Solutions' driver amplifiers are designed for use in fiber optic, telecommunication and automated test equipment applications. These low power amplifiers are perfect for driving lithium niobate (LiNbO₃) modulators at levels up to 7.5 Vpp and provide low jitter and minimized propagation delay, making them an excellent choice for OC-192/STM-64 (SONET) systems.

Telcordia TR-NWT-930 Tested (Report available on request)

FEATURES

- ❑ Less than 3 watt power consumption for 6.5 Vpp out
- ❑ 50 KHz to 13 GHz
- ❑ Low internal jitter and minimized propagation delay
- ❑ Output voltage adjustable from 4.0 to 7.5 Vpp
- ❑ 35 dB typical gain
- ❑ Limiting function to ensure high quality output signal, even with less than optimal input signal


SPECIFICATIONS

Parameters	Min	Max	Units
Input Voltage		1.5	Vdc
Supply Voltage Positive	8	15	Vdc
Supply Voltage Negative	-4.5	6	Vdc
Operating Temperature	-10	+70	°C
Storage Temperature	-20	+85	°C

(V+ = +13.5 to +16.5V, V- = -4.75V to -5.75V, TA = -10°C to +70°C - Min/Max limits only), (V+ = +15V, V- = -5V, TA = +25°C - Typ), Zin/Zout = 50Ω)

Parameters	Conditions	Min	Typ	Max	Units
Bandwidth					
Low Frequency	3 dB point		30	50	kHz
High Frequency	3 dB point		13		GHz
Group Delay Flatness			±25		ps
Rise/Fall Time	10 - 90%		28	32	ps
Gain		28	35	40	dB
Output Voltage Swing	Input=0.7 Vpp NRZ	4	7	8	Vpp
Input Return Loss		10	12		dB
Output Overshoot			5	10	%
Output Eye Crossover		45	50	55	%
Symmetry					
Invert/Non-Invert			Invert		
Eye Crossing Adjust		-10		+10	%
Output Eye Opening	Vpp in eye center 10ps		85		%
Supply Current					
+10V			300	450	mA
-5V			20	40	mA
Output Modulator Bias (Optional)	Bias voltage Input	-9		+21	V


OUTLINE DRAWING

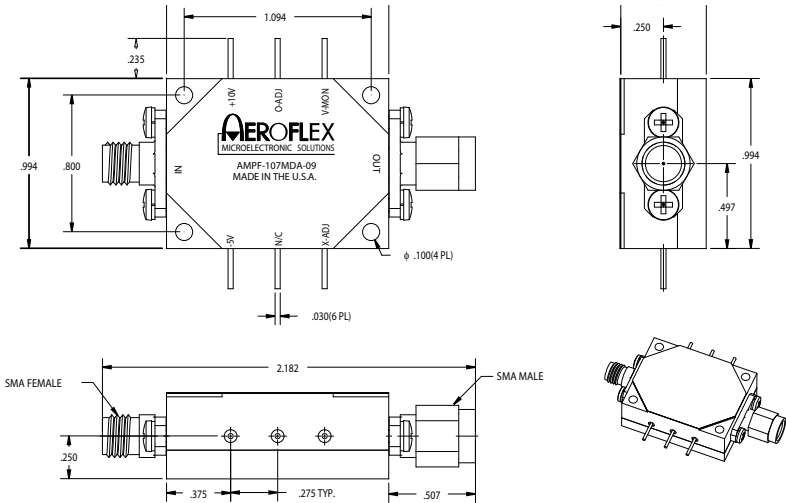

PIN FUNCTION

Pin #	Function
1	VOLTAGE MONITOR
2	OUTPUT ADJUST
3	+10 V
4	-5 V
5	NC
6	CROSSING ADJUST

EYE PATTERN

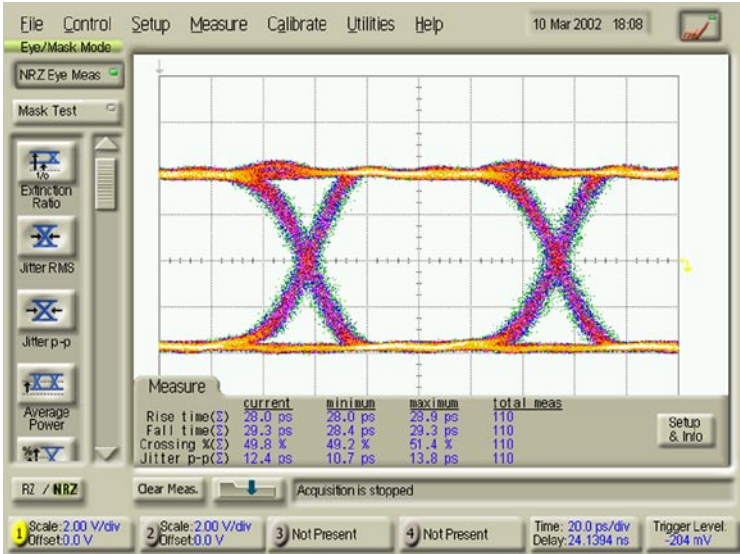

ORDERING INFORMATION

Model Number	Speed	Package
AMPF-107MDA	10.667 Gb/s	See Package Outline

Plainview, New York

Toll Free: 800-THE-1553
Fax: 516- 694-6715

SE and Mid-Atlantic

Tel: 321-951-4164
Fax: 321-951-4254

International

Tel: 805-778-9229
Fax: 805-778-1980

West Coast

Tel: 949-362-2260
Fax: 949-362-2266

Northeast

Tel: 603-888-3975
Fax: 603-888-4585

Central

Tel: 719-594-8017
Fax: 719-594-8468



www.aeroflex.com info-ams@eroflex.com

Aeroflex Microelectronic Solutions reserves the right to change at any time without notice the specifications, design, function, or form of its products described herein. All parameters must be validated for each customer's application by engineering. No liability is assumed as a result of use of this product. No patent licenses are implied.



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused