

Surface Mount

# Power Splitter/Combiner

JCPS-8-10-75

8 Way-0° 75Ω 5 to 1000 MHz



CASE STYLE: BG291  
PRICE: \$71.95 ea. QTY. (1-9)

## Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.62W max.

Permanent damage may occur if any of these limits are exceeded.

## Pin Connections

SUM PORT	1
PORT 1	3
PORT 2	4
PORT 3	5
PORT 4	6
PORT 5	9
PORT 6	10
PORT 7	11
PORT 8	12
GROUND	2,7,8,13,14

## Features

- wideband frequency, 5 to 1000 MHz
- good isolation, 25 dB typ.
- aqueous washable
- shielded metal case
- J-leads for good solderability & strain relief

## Applications


- cellular
- VHF/UHF
- CATV
- communication systems

## Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 9.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
$f_L$ - $f_U$	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
5-1000	34	20	25	15	20	13	0.8	1.5	1.0	2.5	1.8	3.0	3	8	10	0.4	0.5	1.3

L = low range [ $f_L$  to 10  $f_L$ ] M = mid range [10  $f_L$  to  $f_U/2$ ] U = upper range [ $f_U/2$  to  $f_U$ ]


## Outline Drawing

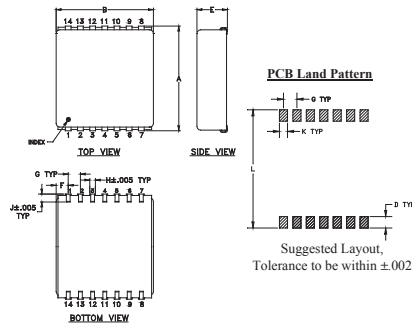

## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.870	.800	--	.100	.250	.100	.100
22.10	20.32	--	2.54	6.35	2.54	2.54
H	J	K	L			wt
.047	.065	.065	.890			grams
1.19	1.65	1.65	22.61			4.0

## Demo Board MCL P/N: TB-136 Suggested PCB Layout (PL-074)

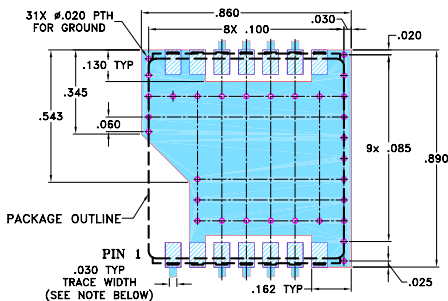

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK




## Typical Performance Data

Freq. (MHz)	Total Loss <sup>1</sup> (dB)						Amplitude Unbalance (dB)	Isolation (dB)				VSWR S	VSWR 1	VSWR 8
	S-1	S-2	S-3	S-4	S-6	S-8		1-2	1-7	3-4	5-7			
5.00	9.63	9.66	9.81	9.63	9.81	9.73	0.18	36.86	36.93	38.23	37.80	1.15	1.20	1.20
15.00	9.59	9.62	9.77	9.60	9.76	9.70	0.18	36.96	36.74	37.32	37.54	1.08	1.16	1.17
25.00	9.62	9.64	9.80	9.62	9.77	9.72	0.18	36.13	36.68	36.29	37.18	1.08	1.16	1.17
40.00	9.65	9.68	9.83	9.65	9.80	9.75	0.18	34.98	36.27	34.95	36.47	1.10	1.16	1.17
60.00	9.68	9.71	9.86	9.68	9.82	9.77	0.18	33.54	35.41	33.42	35.16	1.12	1.16	1.16
90.00	9.73	9.74	9.89	9.71	9.83	9.80	0.18	31.75	33.80	31.44	33.40	1.15	1.16	1.16
120.00	9.76	9.77	9.92	9.74	9.84	9.83	0.18	30.21	32.26	29.89	31.80	1.19	1.16	1.15
150.00	9.80	9.80	9.94	9.76	9.82	9.84	0.18	28.91	30.87	28.51	30.40	1.23	1.17	1.15
180.00	9.84	9.82	9.96	9.77	9.82	9.85	0.18	27.75	29.70	27.33	29.19	1.26	1.17	1.14
250.00	9.96	9.91	10.02	9.85	9.80	9.91	0.22	25.45	27.28	25.03	26.79	1.30	1.20	1.15
450.00	10.37	10.22	10.27	10.09	9.79	10.14	0.59	21.16	22.69	20.90	22.48	1.10	1.30	1.20
650.00	10.98	10.76	10.84	10.67	10.23	10.62	0.74	19.97	21.47	20.36	21.55	1.39	1.37	1.30
800.00	11.09	10.96	11.12	11.00	10.65	10.89	0.47	19.16	22.74	20.83	23.52	1.54	1.41	1.36
900.00	10.89	10.91	11.11	11.00	10.86	11.02	0.29	17.26	23.27	19.18	25.71	1.43	1.41	1.38
1000.00	10.59	10.78	11.02	10.92	11.08	11.23	0.64	15.42	22.72	16.92	27.17	1.34	1.38	1.38


JCPS-8-10-75

1. Total Loss = Insertion Loss + 9dB splitter loss.

JCPS-8-10-75

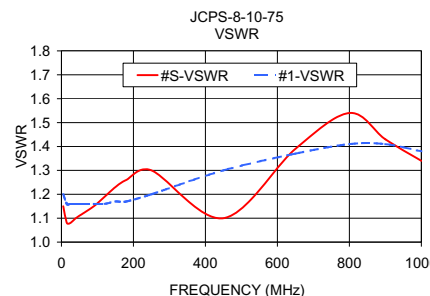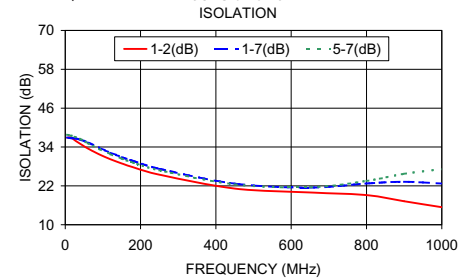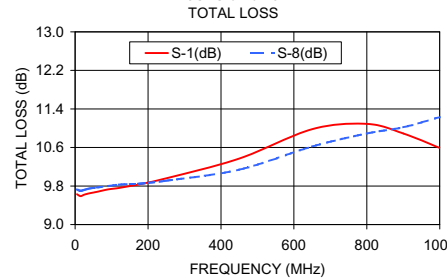

## electrical schematic



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. C  
M127604  
JCPS-8-10-75  
WZ/TD/CP  
100603