

SERIES PPR, PPT RESISTORS & TERMINATIONS

High Power, Thin Film, Drop-in – 10-650 Watts, DC-4 GHz

GENERAL INFORMATION

These high power devices are designed to dissipate power in RF circuits when mounted to an appropriate heat sink. The terminations provide a low VSWR under maximum power conditions. The resistor configurations are typically used in "Wilkinson" type power divider networks, or to terminate 3 dB stripline or microstrip hybrids.

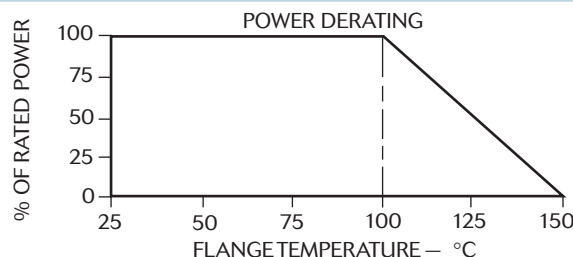
NOTES

1. Input power ratings are based on flange temperature of 100° C maximum.
2. 50 and 100 Ohms standard. Other values from 10-500 Ohms available on special order. Contact factory for details. Standard tolerance $\pm 5\%$. Specify resistance value when ordering.
3. VSWR applies to termination style only.

RoHS
Compliant

AEROFLEX
A passion for performance.

AVERAGE POWER DERATING CURVE



GENERAL SPECIFICATIONS

Resistive Element	Thin Film and Thick Film*
Substrate	Beryllium Oxide Ceramic
Cover	Alumina Ceramic
Mounting Flange	Copper, Nickel Plated per QQ-N-290
Tab	Beryllium Copper, Gold Plated per MIL-G-45204

* Low cost thick film models available on some sizes. Consult Factory for specifications.

PERFORMANCE SPECIFICATIONS

Model	Frequency Range	Input Power (Watts Avg.)	VSWR (Typical) (Note 3)	Capacitance (pF) (Typ.)	Figure No.
PPR & PPT 300-10-3*	DC-4.0 GHz	10	1.35:1 –DC-4.0 GHz	0.8	1
PPR & PPT 515-20-3*	DC-2.0 GHz	20	1.10:1 –DC-1.0 GHz 1.25:1 –1.0-2.0 GHz	0.8	2
PPT 515-30-4	DC-4.0 GHz	30	1.20:1 –DC-4.0 GHz	1.2	3
PPR & PPT 515-30*	DC-2.0 GHz	30	1.10:1 –DC-1.0 GHz 1.25:1 –1.0-2.0 GHz	0.8	4
PPR & PPT 800-40-3	DC-4.0 GHz	40	1.25:1 –DC-4.0 GHz	1.4	5
PPT 800-100A	DC-2.0 GHz	100	1.25:1 –DC-2.0 GHz	1.4	6
PPR & PPT 870-150-3*	DC-1.0 GHz	150	1.20:1 –DC-500 MHz 1.35:1 –500-1000 MHz	3.5	7
PPR & PPT 975-250-3	DC-1.0 GHz	250	1.25:1 –DC-500 MHz 1.35:1 –500-1000 MHz	5.0	8
PPR & PPT 1250-400	DC-500 MHz	400	1.50:1 –DC-500 MHz	7.0	9
PPR & PPT 1900-800	DC-500 MHz	650	1.25:1 –DC-200 MHz 1.50:1 –200-500 MHz	10.2	10

PHYSICAL DIMENSIONS

TERMINATIONS (PPT) SERIES

RESISTORS (PPR) SERIES

FIGURES

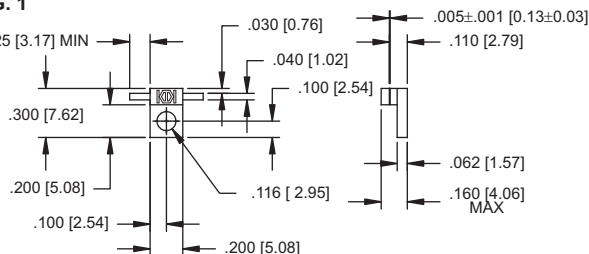
PPT 300-10-3 — 10 WATTS
Flange Mounted



PPR 300-10-3 — 10 WATTS
Flange Mounted





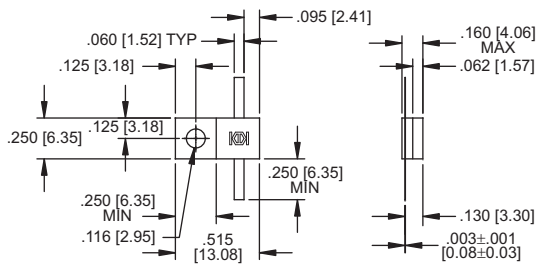

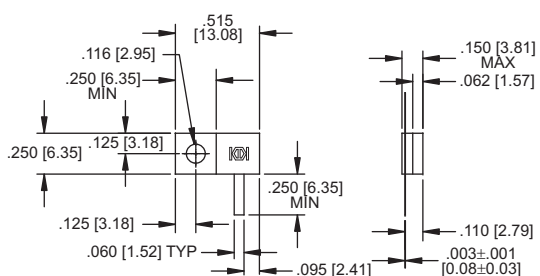


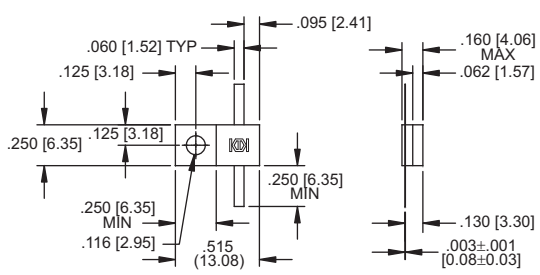


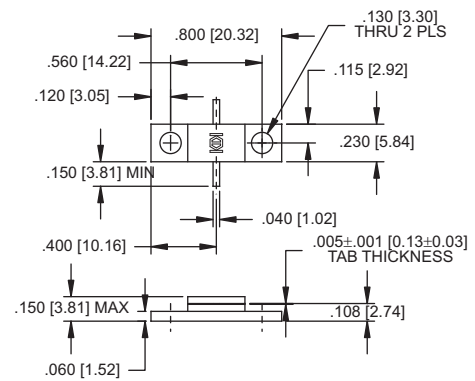
FIG. 1



KEY: Inches [Millimeters] .XX \pm .03 .XXX \pm .010 [X \pm 0.8 .XX \pm 0.25]

SERIES PPR, PPT RESISTORS & TERMINATIONS


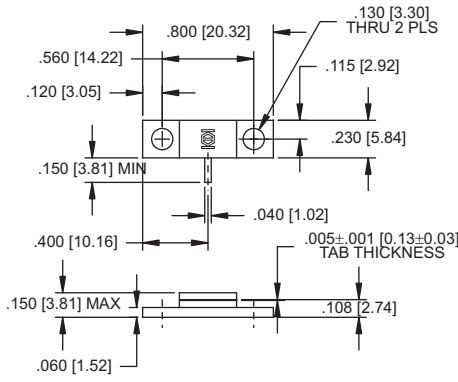


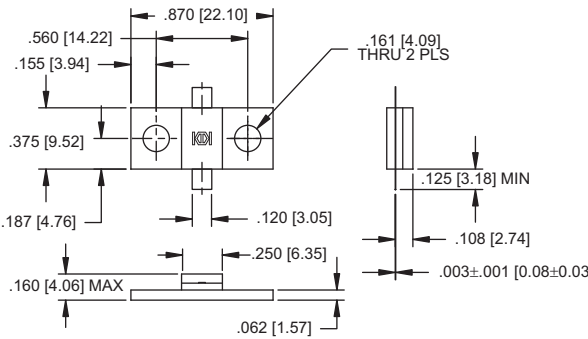


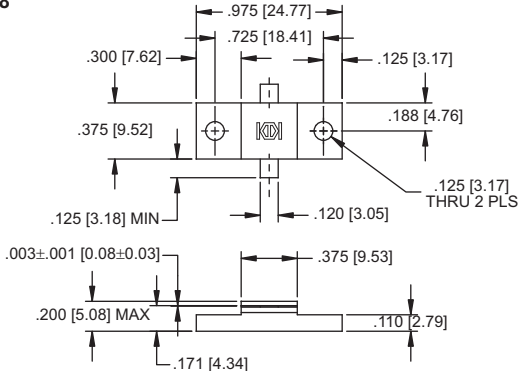


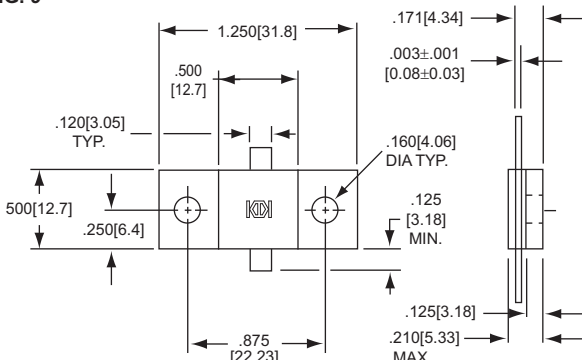
PHYSICAL DIMENSIONS

TERMINATIONS (PPT) SERIES	RESISTORS (PPR) SERIES	FIGURES
<p>PPT 515-20-3 — 20 WATTS Flange Mounted</p> 	<p>PPR 515-20-3 — 20 WATTS Flange Mounted</p> 	<p>FIG. 2</p> 
<p>PPT 515-30-4 — 30 WATTS Flange Mounted</p> 	<p><i>Offered as a Termination Only!</i></p>	<p>FIG. 3</p> 
<p>PPT 515-30 — 30 WATTS Flange Mounted</p> 	<p>PPR 515-30 — 30 WATTS Flange Mounted</p> 	<p>FIG. 4</p> 
<p>PPT 800-40-3 — 40 WATTS Flange Mounted</p> 	<p>PPR 800-40-3 — 40 WATTS Flange Mounted</p> 	<p>FIG. 5</p> 

KEY: Inches [Millimeters] .XX ±.03 .XXX ±.010 [X ±0.8 .XX ±0.25]

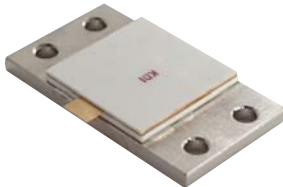
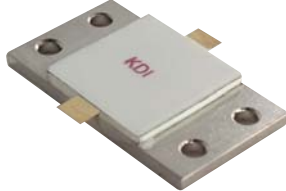
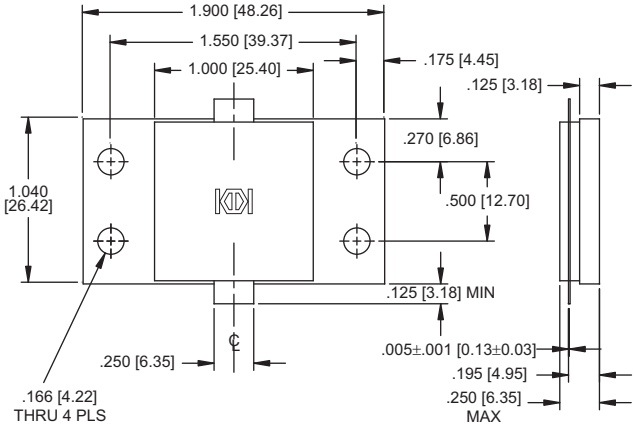
SERIES PPR, PPT RESISTORS & TERMINATIONS

PHYSICAL DIMENSIONS

TERMINATIONS (PPT) SERIES	RESISTORS (PPR) SERIES	FIGURES
<p>PPT 800-100A — 100 WATTS Flange Mounted</p> 	<p><i>Offered as a Termination Only!</i></p>	<p>FIG. 6</p> 
<p>PPT 870-150-3 — 150 WATTS Flange Mounted</p> 	<p>PPR 870-150-3 — 150 WATTS Flange Mounted</p> 	<p>FIG. 7</p> 
<p>PPT 975-250-3 — 250 WATTS Flange Mounted</p> 	<p>PPR 975-250-3 — 250 WATTS Flange Mounted</p> 	<p>FIG. 8</p> 
<p>PPT 1250-400 — 400 WATTS Flange Mounted</p> 	<p>PPR 1250-400 — 400 WATTS Flange Mounted</p> 	<p>FIG. 9</p> 

KEY: Inches [Millimeters] .XX ±.03 .XXX ±.010 [X ±0.8 .XX ±0.25]

SERIES PPR, PPT RESISTORS & TERMINATIONS

PHYSICAL DIMENSIONS		
TERMINATIONS (PPT) SERIES	RESISTORS (PPR) SERIES	FIGURES
Flange Mounted 	Flange Mounted 	

KEY: Inches [Millimeters] .XX ±.03 .XXX ±.010 [X ±0.8 .XX ±0.25]