


Inductors (Lead Type)

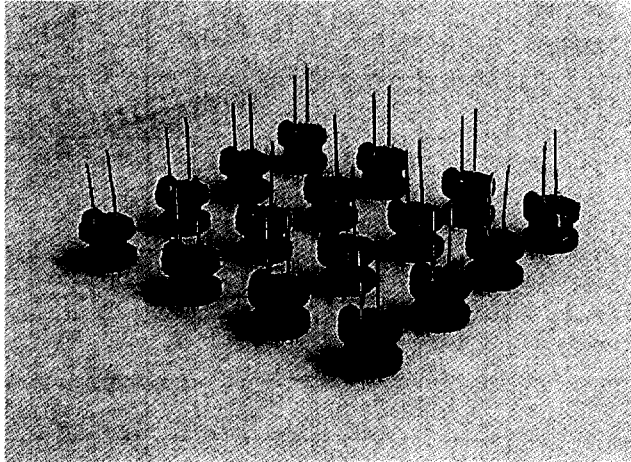

Features


- Low cost.
- High current, Low leakage flux.

Applications

- Oscillation.
- Choke.
- EMI filter.
- CTV, VCR, Audio, PC, Facsimile.

Classification


CCLD 1006 L - 10 047

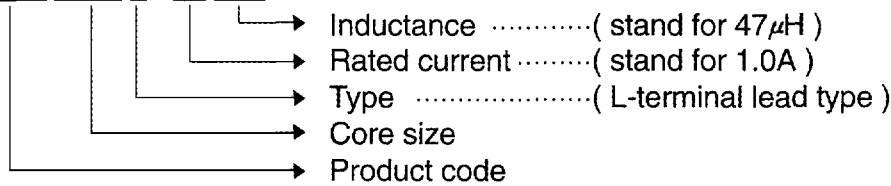

Custom made coils with different inductance and rated current available on request.

Standard Types

(unit : mm)

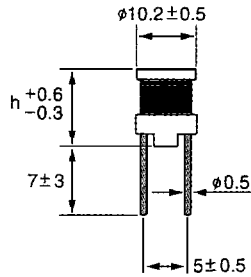

Type	h
K	6.0
L	8.0
M	8.7

Model	Rated Current (A)Max	Inductance ($\mu\text{H} \pm 10\%$)	DCR ($\text{m}\Omega \pm 15\%$)	Temp.Rise Max.(deg.)	Type
CCLD1006L-10047	1.0	47	95	45	K
CCLD1006L-10082	1.0	82	160	45	K
CCLD1006L-10100	1.0	100	205	45	K
CCLD1006L-10150	1.0	150	295	45	K
CCLD1008L-17047	1.7	47	90	45	L
CCLD1008L-15082	1.5	82	150	45	L
CCLD1008L-15100	1.5	100	175	45	L
CCLD1008L-10150	1.0	150	255	45	L
CCLD1087L-22047	2.2	47	70	45	M
CCLD1087L-20082	2.0	82	105	45	M
CCLD1087L-17100	1.7	100	145	45	M
CCLD1087L-10150	1.0	150	210	45	M