
SSF-LXH4RA5XX SERIES P.C. LED RE-LAMPABLE INDICATOR
FEATURES

- Easy P.C. Installation
- Replaceable LEDs
- Choice of Colors, Current
- Blinking Type Option

APPLICATIONS

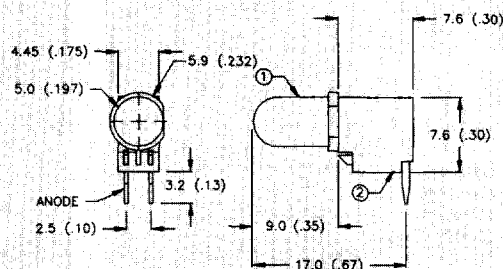
- Fault Indicator
- Back Lighting Indicator
- P.C. Mount Indicators

MATERIAL SPECIFICATIONS

- Holder: Noryl/Grey
- Termination: Brass/Tinned
- Installation: P.C. Mount/Solder

LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS TYP (mCD) @ mA	LED SERIES USED
SSF-LXH4RA5ID	RED	635	10-25	2.1	14	20 SSL-LX5093XX
SSF-LXH4RA5SRD	RED	660	10-25	1.7	70	20 SSL-LX5093XX
SSF-LXH4RA5GD	GREEN	565	10-25	2.1	14	20 SSL-LX5093XX
SSF-LXH4RA5YD	YELLOW	585	10-25	2.1	14	20 SSL-LX5093XX
BI-COLOR OPTION						
SSF-LXH4RA5HGW	RED/GREEN	695/565	10-25	2.1	6/6	20 SSL-LX5093HGW
LOW CURRENT OPTIONS						
SSF-LXH4RA5LID	RED	635	1-5	1.8	1.4	2 SSL-LX5093LXX
SSF-LXH4RA5LGD	GREEN	565	1-5	1.8	1.4	2 SSL-LX5093LXX
SSF-LXH4RA5LYD	YELLOW	585	1-5	1.8	1.4	2 SSL-LX5093LXX
BLINKING OPTIONS						
SSF-LXH4RA5BID	RED	635	10-20	3-15V	8	9V SSL-LX5093LXX

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm

SSF-LXH100MXX SERIES P.C. LED MATING SINGLE HOLDER
FEATURES

- Easy P.C. Installation
- Mating Holder
- Choice of Colors, Current
- Blinking Type Option

APPLICATIONS

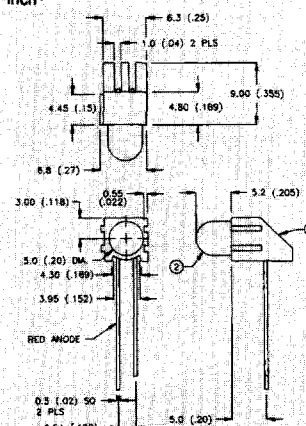
- Fault Indicator
- Back Lighting Indicator
- P.C. Mount Indicators

MATERIAL SPECIFICATIONS

- Holder: Black Nylon
- Terminations: 0.5mm □ Leads
- Installation: P.C. Mount/Solder

LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS TYP (mCD) @ mA	LED SERIES USED
SSF-LXH100MID	RED	635	10-25	2.1	9	20 SSL-LX509F3XX
SSF-LXH100MSRD	RED	660	10-25	1.7	40	20 SSL-LX509F3XX
SSF-LXH100MGD	GREEN	565	10-25	2.1	9	20 SSL-LX509F3XX
SSF-LXH100MYD	YELLOW	585	10-25	2.1	9	20 SSL-LX509F3XX
BI-COLOR OPTION						
SSF-LXH100MHGW	RED/GREEN	695/565	10-25	2.1	6/6	20 SSL-LX407F3HGW
LOW CURRENT OPTIONS						
SSF-LXH100MLID	RED	635	1-5	1.8	1.2	2 SSL-LX509F3XX
SSF-LXH100MLGD	GREEN	565	1-5	1.8	1.2	2 SSL-LX509F3XX
SSF-LXH100LYD	YELLOW	585	1-5	1.8	1.2	2 SSL-LX509F3XX

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm

SSF-LXH101MXX SERIES P.C. MOUNT LED FLAT BACK HOLDER
FEATURES

- Easy P.C. Installation
- Short Length Holder
- Choice of Colors, Current
- Blinking Type Option

APPLICATIONS

- Fault Indicator
- Back Lighting Indicator
- P.C. Mount Indicators

MATERIAL SPECIFICATIONS

- Holder: Black Nylon
- Terminations: 0.5mm □ Leads
- Installation: P.C. Mount/Solder

LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS TYP (mCD) @ mA	LED SERIES USED
SSF-LXH101ID	RED	635	10-25	2.1	8	20 SSL-LX507F3XX
SSF-LXH101SRD	RED	660	10-25	1.7	40	20 SSL-LX507F3XX
SSF-LXH101GD	GREEN	565	10-25	2.1	8	20 SSL-LX507F3XX
SSF-LXH101YD	YELLOW	585	10-25	2.1	8	20 SSL-LX507F3XX
BI-COLOR OPTION						
SSF-LXH101HGW	RED/GREEN	695/565	10-25	2.1	6/6	20 SSL-LX507F3HGW
LOW CURRENT OPTIONS						
SSF-LXH101LID	RED	635	1-5	1.8	1.2	2 SSL-LX507F3LXX
SSF-LXH101LGD	GREEN	565	1-5	1.8	1.2	2 SSL-LX507F3LXX
SSF-LXH101LYD	YELLOW	585	1-5	1.8	1.2	2 SSL-LX507F3LXX

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm
