


Type No. AAZ15

## GOLD BONDED GERMANIUM DIODE

6 Lake Street  
PO Box 1436  
Lawrence, MA 01841  
Telephone (617) 681-0392  
TeleFax (617) 681-9135  
Telex 928377

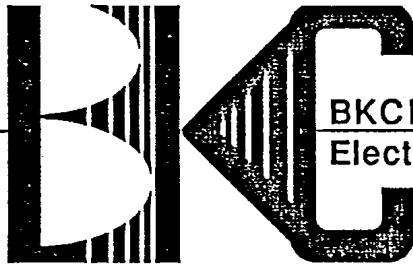

### FEATURES

**Low forward voltage drop—low power consumption**

**Thirty years of proven reliability—one million hours mean time between failures (MTBF)**

**Very low noise level**

**Metallurgically bonded**

### ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

**Peak Inverse Voltage** 100 Volts

**Peak Forward Current** 500 mA


**Operating Temperature** - 65 °C to 85 °C

**Average Power Dissipation** 80 mW

### ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
<b>Peak Inverse Voltage</b>	PIV	1 mA	100		V	25 °C
<b>Reverse Current</b>	Ir	100 V		100	µA	25 °C
<b>Forward Voltage</b>	Vf	10 mA		0.45	V	25 °C

### MECHANICAL

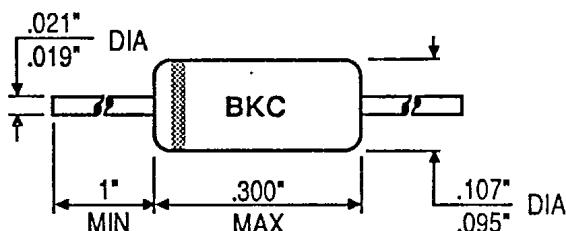

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.