

# CERAMIC SMD MICROPROCESSOR CRYSTAL

ABM2

Pb in Glass  
(exempt per RoHS 2002/95/EC Annex (5))

**RoHS**  
Compliant



8.0 x 4.5 x 1.8mm

## FEATURES:

- Glass sealed package
- Ceramic package assures high reliability
- Tight tolerance and stability available
- Suitable for solder reflow

## APPLICATIONS:

- High density applications
- Modems, communication and test equipment
- PCMCIA, Wireless applications
- Microprocessor crystals

## STANDARD SPECIFICATIONS:

### PARAMETERS

ABRACON P/N	ABM2 Series
Frequency Range	6.000 MHz - 100.000 MHz
Operation Mode	AT-strip 6MHz - 50MHz (Fundamental) 30MHz - 100MHz (3rd Overtone)
Operating Temperature	-10°C to + 60°C (see options)
Storage Temperature	- 40°C to + 85°C
Frequency Tolerance at +25°C	± 50 ppm max. (see options)
Frequency Stability over the Operating Temp. (Ref to +25°C)	± 50 ppm max. (see options)**
Equivalent Series Resistance	See Table 1
Shunt Capacitance C <sub>0</sub>	7pF max.
Load Capacitance C <sub>L</sub>	18pF (see options)
Drive Level	100µW max., 10µW Typical
Aging at 25°C First Year	± 5ppm max.
Insulation Resistance	500MΩ min. @ 100Vdc ± 15V


TABLE 1

Frequency (MHz)	ESR(Ω) max.
6.00-7.999 (Fund.)	200
8.00 - 9.999 (Fund.)	100
10.00 - 11.999 (Fund.)	80
12.00 - 49.00(Fund.)	50
30.00 - 100.00 (3rd O/T)	70

## OPTIONS AND PART IDENTIFICATION:

(Left blank if standard)

ABM2 - Frequency - □ - R□□□ - □ - □ - □ - □ - □

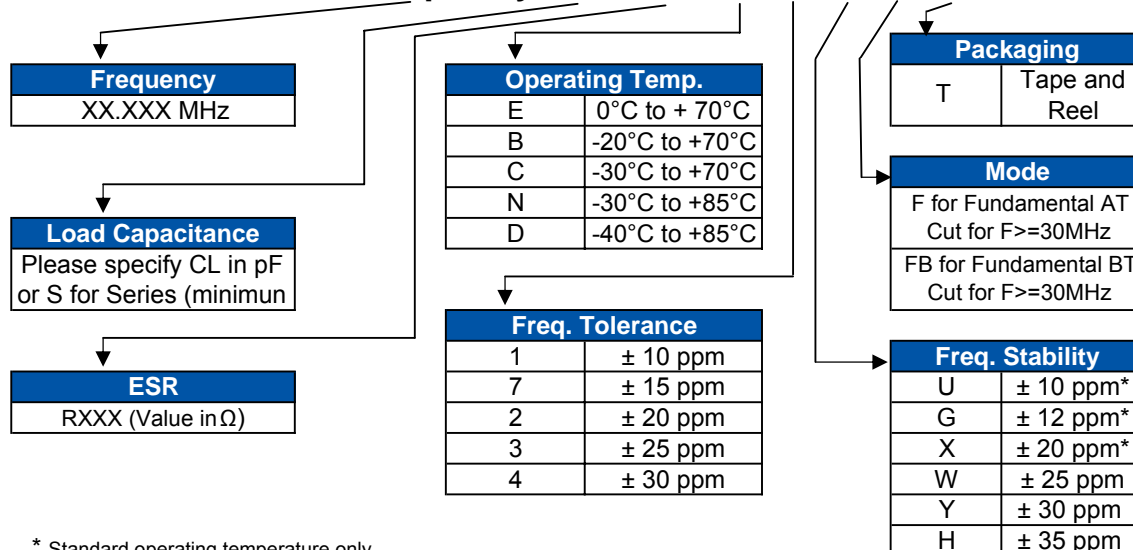

\* Standard operating temperature only.

\*\* Frequency stability ± 100 ppm max. @ -40 C to 80 C for BT-cut.



# CERAMIC SMD MICROPROCESSOR CRYSTAL

ABM2


Pb in Glass  
(exempt per RoHS 2002/95/EC Annex (5))

**RoHS**  
Compliant



8.0 x 4.5 x 1.8mm

## OUTLINE DRAWING:

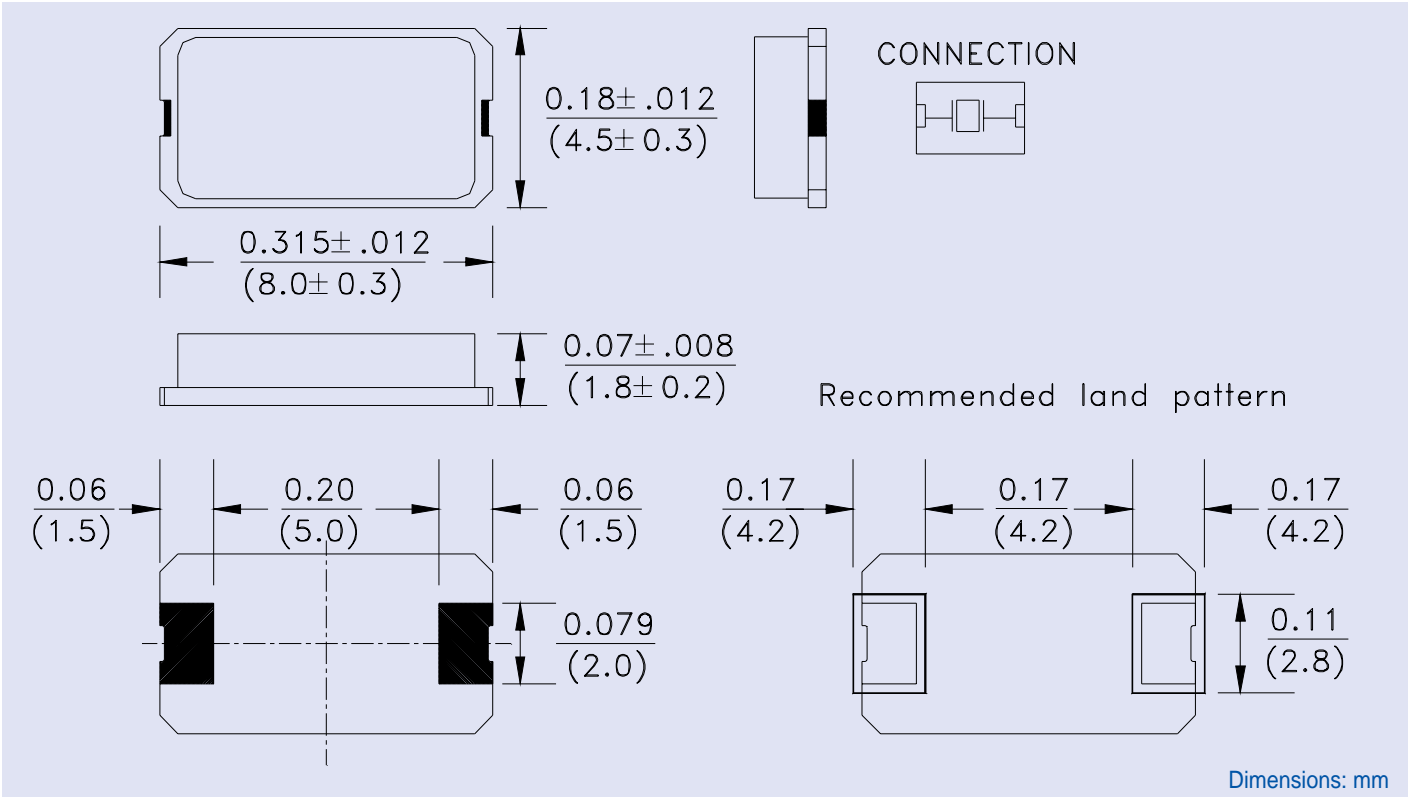

## TAPE & REEL: Tape and reel 1,000pcs/reel

