

RoHS Compliant Product

A suffix of "-C" specifies halogen & lead-free



FEATURES

- High Transition Frequency

APPLICATIONS

- VHF Amplifier
- Mixer, Local Oscillator

TO-92

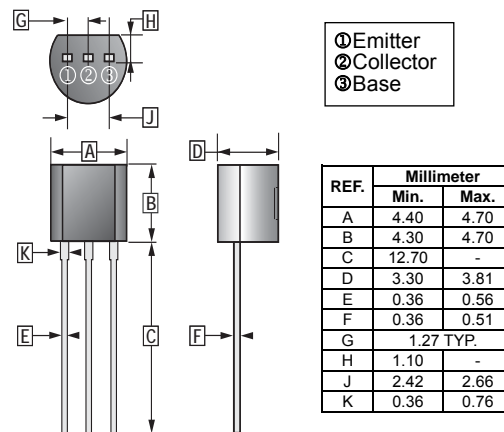

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CB0}	30	V
Collector to Emitter Voltage	V_{CEO}	19	V
Emitter to Base Voltage	V_{EBO}	2	V
Collector Current - Continuous	I_C	50	mA
Collector Power Dissipation	P_C	300	mW
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	416	$^\circ\text{C} / \text{W}$
Junction, Storage Temperature	T_J, T_{STG}	150, -55~150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Collector to Base Breakdown Voltage	$V_{(BR)CBO}$	30	-	-	V	$I_C=0.01\text{mA}, I_E=0$
Collector to Emitter Breakdown Voltage	$V_{(BR)CEO}$	19	-	-	V	$I_C=3\text{mA}, I_B=0$
Emitter to Base Breakdown Voltage	$V_{(BR)EBO}$	2	-	-	V	$I_E=0.01\text{A}, I_C=0$
Collector Cut - Off Current	I_{CBO}	-	-	0.5	μA	$V_{CB}=10\text{V}, I_E=0$
Emitter Cut - Off Current	I_{EBO}	-	-	0.5	μA	$V_{EB}=2\text{V}, I_C=0$
DC Current Gain	h_{FE}	40	-	-		$V_{CE}=10\text{V}, I_C=10\text{mA}$
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	-	-	1	V	$I_C=20\text{mA}, I_B=4\text{mA}$
Transition Frequency	f_T	600	-	-	MHz	$V_{CE}=10\text{V}, I_C=10\text{mA}$
Collector Output Capacitance	C_{ob}	-	-	2	pF	$V_{CB}=10\text{V}, I_E=0, f=1\text{MHz}$