




Specification

SO15P

All exposed cast aluminum components are made of non corrosive pure aluminum copper free (Aluminum is less than .1% copper content.#356 alloy.)
 Finish: All polyester powder baked coatings preceded with a 5 baths preparation process. Meets military grade MIL-C781706 with a 2000 hours salt spray test.

- Pulse rated medium base porcelain socket.
- 75W/600V thermoplastic compact fluorescent socket.
- One-piece molded silicone gasket with memory retention.
- High power factor CWA ballast.
- All stainless steel hardware.
- All Moving and removable parts are sealed with a memory retention silicone gasket.

- 1 - 36" dia. x 1/4" thick aluminum disc reflector. Reflector is standard textured white on both faces. Optional non reflective face painted same color as the luminaire suffix **-RD**
- 2 - Reinforcing stabilizer bars.
- 3 - 1" dia.solid aluminum twin rods reflector support.
- 4 - Cast aluminum sealed top cover , with clear tempered flush mount lens.
- 5 - 8" dia. cast aluminum housing.
- 6 - Cast aluminum sealed removable glass lens frame, with perimeter memory retention embedded silicone gasket.
- 7 - Tempered clear glass lens with minute prisms for light uniformity.
- 8 - Semi-specular aluminum reflector.
- 9 - 2" x 2" extruded square aluminum twin bollard stands.
- 10 - One piece heavy cast aluminum triangular bollard base.
- 11 - Aluminum flush mount sealed access cover plate with socket flat head stainless steel screws.
- 12 - Set of four 3/4" -10 x 18" lg. galvanized anchor bolts.

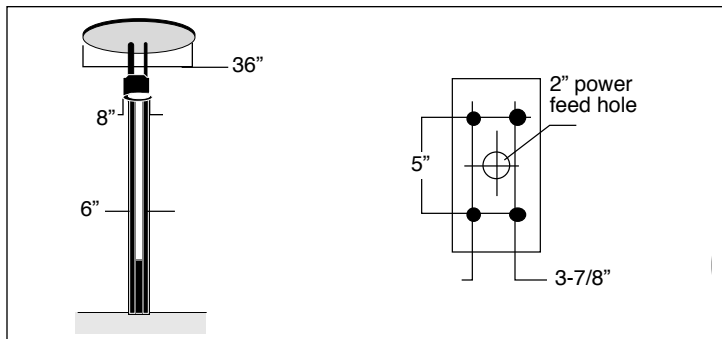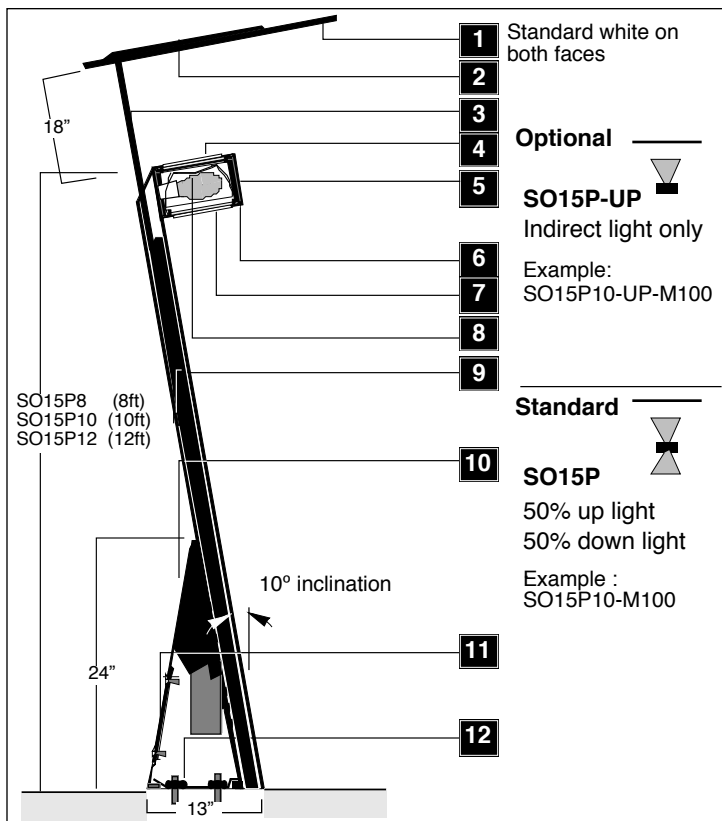

Separate updated technical specification sheets with related models and light sources with I.E.S formatted photometry are available on www.luminis.com.

For options details and specifications, please refer to pages **72 & 128**

Certification UL. Wet Location. **Mounting** Set of four 3/4"-10 x 18" lg. galvanized anchor bolts.

Model#	Light source selection	Voltage	Finish	Options
<input type="checkbox"/> SO15P8 <input type="checkbox"/> SO15P10 <input type="checkbox"/> SO15P12	<div style="display: flex; justify-content: space-between;"> <div> <p>MH (ED17)</p> <input type="checkbox"/> M50 <input type="checkbox"/> M70 <input type="checkbox"/> M100 <input type="checkbox"/> M150 <input type="checkbox"/> M175</div> <div> <p>MH (G12) T6</p> <input type="checkbox"/> M39T <input type="checkbox"/> M70T <input type="checkbox"/> M150T</div> </div> <p>HPS (ED17)</p> <input type="checkbox"/> H50 <input type="checkbox"/> H70 <input type="checkbox"/> H100 <input type="checkbox"/> H150	<p>120 V Standard factory prewired (If no voltage is specified) For other voltages, please specify with catalog number.</p> <p>H.I.D.</p> <input type="checkbox"/> 208 V <input type="checkbox"/> 240 V <input type="checkbox"/> 277 V <input type="checkbox"/> 347 V	<p>(Refer to color chart)</p> <p><u>Standard selection</u></p> <input type="checkbox"/> WHT: Snow white <input type="checkbox"/> BKT: Jet black <input type="checkbox"/> BZT: Bronze <input type="checkbox"/> GRT: Titanium gray <input type="checkbox"/> DGT: Gun metal <input type="checkbox"/> CHT: Champagne <input type="checkbox"/> MST: Matte silver <input type="checkbox"/> GNT: Forest green	<p><input type="checkbox"/> RD:: <u>Accessories</u> Alternate top face disc color same as luminaire.</p> <p><input type="checkbox"/> UP:: Up light only.</p> <p><input type="checkbox"/> FS: <u>Electrical</u> Fuse</p>
	<p>(Lamps by others)</p>	<p>Note: 50W.HPS is available with 120/277V only.</p>	<p><u>Optional colors</u></p> <input type="checkbox"/> CS: Custom color <input type="checkbox"/> RAL: RAL# color	

luminaires may be altered for design improvements or discontinued without prior notice.