

NUMBER GS-12-0974	TYPE Product Specification		
TITLE TRX10GDP0310C1 (SFP+ LR Module)		PAGE 1 of 14	REVISION A
		AUTHORIZED BY J. Blank	DATE 11 July 2011
CLASSIFICATION UNRESTRICTED			

Product Specification

10 GbD SFP+ 1310 nm Limiting Transceiver

TRX10GDP0310C1



Product Features:

- Hot pluggable SFP+ optical transceiver
- Data rate transparent from 9.95 to 11.3 Gbps
- Low power consumption, 0.8 W typ.
- Excellent EMI performance
- Transmission distance up to 10 km SM fiber
- 0 °C to +70 °C case operating temperature
- 1310 nm DFB laser
- Duplex LC connector
- Laser Class 1
- RoHS 6/6 compliant

Applications:

- 10G Ethernet 10GBASE-LR/LW
- 10G Fibre Channel 1200-SM-LL-L

FCI's SFP+ optical transceiver TRX10GDP0310C1 is compliant with the SFP+ MSA specifications (SFF-8431 and SFF-8432) and with 10GBASE-LR/LW per IEEE 802.3 as well as 1200-SM-LL-L per 10G Fibre Channel. It is RoHS 6/6 compliant per Directive 2002/95/EC and laser class 1 safety compliant per IEC/CDRH. The sub-Watt power consumption and the excellent EMI performance allow system design with high port density.

Supported Standards

Application	Standard	Data Rate
10G Ethernet LAN/WAN	IEEE 802.3 10GBASE-LR/LW	10.3125 / 9.953 Gbps
10G Fibre Channel	1200-SM-LL-L	10.518 Gbps

NUMBER GS-12-0974	TYPE Product Specification		
TITLE TRX10GDP0310C1 (SFP+ LR Module)		PAGE 2 of 14	REVISION A
		AUTHORIZED BY J. Blank	DATE 11 July 2011
CLASSIFICATION UNRESTRICTED			

Table of Contents

Table of Contents	2
Functional Description	3
Electrical Characteristics	4
Absolute Maximum Ratings	4
Recommended Operating Conditions	4
Low Speed Characteristics	4
SFI Module Transmitter Input Characteristics	5
SFI Module Receiver Output Characteristics	5
Optical Characteristics	6
General Parameters	6
Optical Transmitter	6
Optical Receiver	6
Application Information	7
Connector Pinout	7
Electrical Pin Definition	7
Application Schematics	8
Interfacing the Transceiver	9
Digital Optical Monitoring	9
Module Outline	10
Module Safety & Compliance	11
ESD & Electromagnetic Compatibility	11
Eye Safety	12
Ordering Information	13


NUMBER GS-12-0974	TYPE Product Specification	FCI	
TITLE TRX10GDP0310C1 (SFP+ LR Module)		PAGE 3 of 14	REVISION A
		AUTHORIZED BY J. Blank	DATE 11 July 2011
CLASSIFICATION UNRESTRICTED			

Functional Description

The transmit path is based on an AC coupled 100 ohm differentially terminated driver coupled to a 1310 nm DFB laser. Laser output may be disabled by pulling the transmitter disable (TX_DIS) line high which is its default state when leaving the input floating due to an internal pull-up resistor. A fault condition is raised upon detection of an abnormal laser state.

The receive path consists of a receiver optical sub-assembly (ROSA) for optical to electrical conversion, followed by a limiting amplifier boosting the electrical signal. A loss of signal (LOS) status line provides information to facilitate easy link detection.

Complete digital optical monitoring is implemented in compliance to SFF-8472 and made accessible via the 2-wire interface providing real time information about all important module parameters and status information.

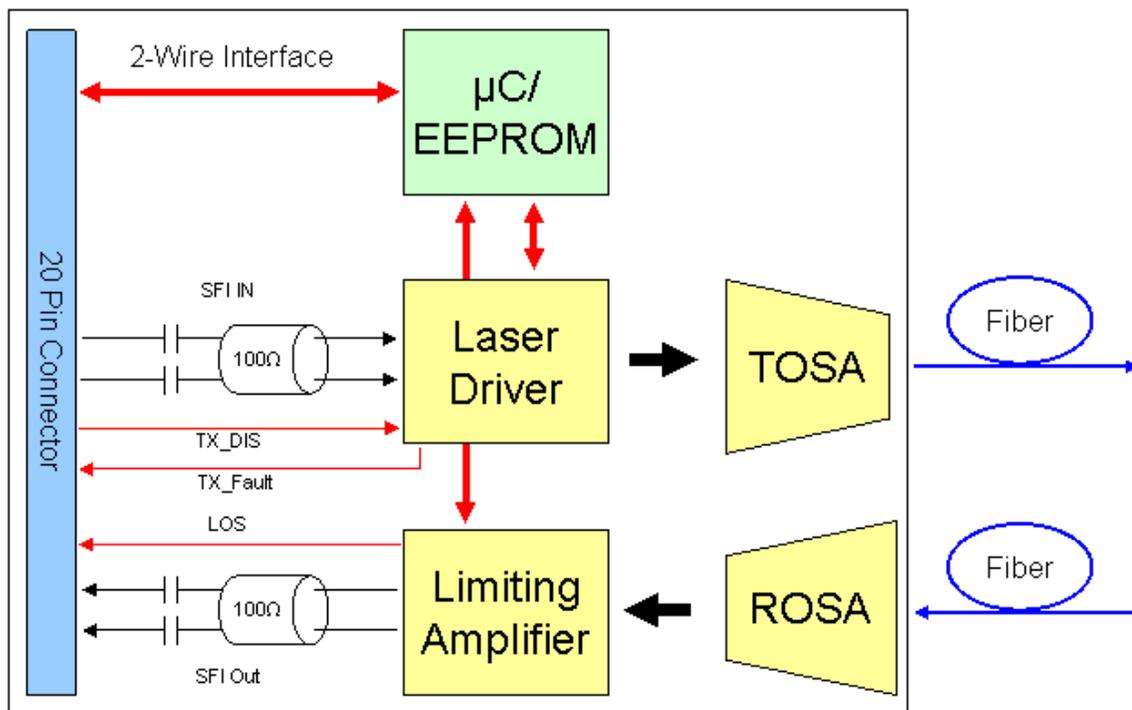

NUMBER GS-12-0974	TYPE Product Specification		
TITLE TRX10GDP0310C1 (SFP+ LR Module)		PAGE 4 of 14	REVISION A
		AUTHORIZED BY J. Blank	DATE 11 July 2011
CLASSIFICATION UNRESTRICTED			

Electrical Characteristics

Absolute Maximum Ratings

Rating	Conditions	Symbol	Min	Max	Units
Storage Ambient Temperature		ϑ_{stg}	-40	+85	°C
Powered Case Temperature		ϑ_c	0	+75	°C
Operating Relative Humidity	Non condensing	RH	0	95	%
Supply Voltage Range		$V_{CCT/R}$	-0.5	4.0	V

Any stress beyond the maximum ratings may result in permanent damage to the device. Specifications are guaranteed only under recommended operating conditions.

Recommended Operating Conditions

Parameter	Conditions	Symbol	Min	Typ	Max	Units
Operating Case Temperature		ϑ_{Case}	0		+70	°C
Power Supply Voltage		$V_{CCT/R}$	3.135	3.30	3.465	V
DC Common Mode Voltage	SFI Signals	V_{CM}	-0.5		4.0	V

Low Speed Characteristics

Parameter	Conditions	Symbol	Min	Typ	Max	Units
Supply Current Transmitter	@ V_{CCT}	$I_{VCC TX}$		150		mA
Supply Current Receiver	@ V_{CCR}	$I_{VCC RX}$		80		mA
Total Supply Current	@ $V_{CCT/R}$	I_{VCC}			300	mA
Power Consumption				0.8	1.0	W
TX_Fault, RX_LOS	Host Vcc Range 2 V – 3.47 V, $I_{OL_max} = 4$ mA	V_{OL}	0		0.4	V
		V_{OH}	Host_Vcc – 0.5		Host_Vcc + 0.3	
TX_Dis, RS0, RS1	Low Voltage TTL	V_{IL}	-0.3		0.8	
		V_{IH}	2.0		$V_{CCT} + 0.5$	
SCL, SDA	Host Vcc Range 3.13 V – 3.47 V, $I_{OL_max} = 4$ mA	V_{IL}	-0.3		$V_{CCT} * 0.3$	
		V_{IH}	$V_{CCT} * 0.7$		$V_{CCT} + 0.5$	
		V_{OL}	0.0		0.4	
		V_{OH}	Host_Vcc – 0.5		Host_Vcc + 0.3	

NUMBER GS-12-0974	TYPE Product Specification		
TITLE TRX10GDP0310C1 (SFP+ LR Module)		PAGE 5 of 14	REVISION A
		AUTHORIZED BY J. Blank	DATE 11 July 2011
CLASSIFICATION UNRESTRICTED			

SFI Module Transmitter Input Characteristics

Parameter	Conditions	Symbol	Min	Typ	Max	Units
Nominal Data Rate				10.3125		Gbd
Reference Differential Input Impedance		Z_d		100		Ω
Input AC Common Mode Input Voltage			0		25	mV (RMS)
Differential Input Voltage Swing	$2 \times V(TD+) - V(TD-) $	V_{ID}	150		900	mV
Differential Input S-parameter	0.01 – 4.1 GHz	SDD11			¹⁾	dB
	4.1 – 11.1 GHz				²⁾	dB
Differential to Common Mode Conversion ³⁾	0.01 – 11.1 GHz	SCD11			-10	dB
Total Jitter		TJ			0.28	UI(p-p)
Data Dependent Jitter		DDJ			0.1	UI(p-p)
Uncorrelated Jitter		UJ			0.023	RMS

- 1) Reflection coefficient given by equation $SDD11(dB) < -12 + 2 \times \text{SQRT}(f)$, with f in GHz.
- 2) Reflection coefficient given by equation $SDD11(dB) < -6.3 + 13 \times \text{Log}10(f/5.5)$, with f in GHz.
- 3) Common mode reference impedance is 25 Ω .

SFI Module Receiver Output Characteristics

Parameter	Conditions	Symbol	Min	Typ	Max	Units
Nominal Data Rate				10.3125		Gbd
Reference Differential Output Impedance		Z_d		100		Ω
Termination Mismatch		ΔZ_d			5	%
Output AC Common Mode Voltage					7.5	mV (RMS)
Differential Output Amplitude	$R_{Load} = 100 \text{ ohm},$ $2 \times V(RD+) - V(RD-) $	V_{OSPP}	350	530	800	mV
Output Rise and Fall Time	20 % to 80 %	t_R, t_F	28			ps
Differential Output S-parameter	0.01 – 4.1 GHz	SDD22			¹⁾	dB
	4.1 – 11.1 GHz				²⁾	dB
Common Mode Output Return Loss ⁴⁾	0.01 – 2.5 GHz	SCC22			³⁾	dB
	2.5 – 11.1 GHz				-3	dB
Deterministic Jitter		DJ			0.42	UI(p-p)
Total Jitter	See SFP+ MSA	TJ			0.7	UI(p-p)

- 1) Reflection coefficient given by equation $SDD22(dB) < -12 + 2 \times \text{SQRT}(f)$, with f in GHz.
- 2) Reflection coefficient given by equation $SDD22(dB) < -6.3 + 13 \times \text{Log}10(f/5.5)$, with f in GHz.
- 3) Reflection coefficient given by equation $SCC22(dB) = -7 + 1.6 \times f$, with f in GHz
- 4) Common mode reference impedance is 25 Ω .

NUMBER GS-12-0974	TYPE Product Specification		
TITLE TRX10GDP0310C1 (SFP+ LR Module)		PAGE 6 of 14	REVISION A
		AUTHORIZED BY J. Blank	DATE 11 July 2011
CLASSIFICATION UNRESTRICTED			

Optical Characteristics

General Parameters

Parameter	Conditions	Min Modal Bandwidth (MHz*km)	Symbol	Min	Typical 10GBd	Units
Operating Range	SMF		I_{OP}		10	km

Optical Transmitter

Parameter	Conditions	Symbol	Min	Typ	Max	Units
Center Wavelength		λ_{TRP}	1290	1310	1330	nm
Side Mode Suppression Ratio		SMSR	30			dB
Average Launch Power		P_{avg}	-6.0		-0.5	dBm
Optical Modulation Amplitude		P_{OMA}	-5.2		1	dBm
Extinction Ratio		ER	3.5			dB
Relative Intensity Noise		RIN			-128	dB/Hz

Optical Receiver


Parameter	Conditions	Symbol	Min	Typ	Max	Units
Center Wavelength		λ_C	1260	1310	1355	nm
Average Input Power		P_{avg}			0.5	dBm
Receiver Sensitivity	PRBS $2^{31}-1$, BER < $1 \cdot 10^{-12}$ @10.3125GBd	$P_{IN(OMA)}$		-18	-15	dBm
Stressed Receiver Sensitivity	PRBS $2^{31}-1$, BER < $1 \cdot 10^{-12}$ @ 10.3125GBd	$P_{IN(OMA)}$		-15	-12	dBm
Loss of Signal	Assert	P_{avg_as}	-30	-21		dBm
	De-Assert	P_{OMA_deas}		-19	-15	
Loss of Signal Hysteresis		Hyst	0.5			dB

Note: The specified characteristics are met within the recommended range of operating. Unless otherwise noted, typical data are quoted at nominal voltages and +25°C ambient temperature.

NUMBER GS-12-0974	TYPE Product Specification		
TITLE TRX10GDP0310C1 (SFP+ LR Module)		PAGE 7 of 14	REVISION A
		AUTHORIZED BY J. Blank	DATE 11 July 2011
CLASSIFICATION UNRESTRICTED			

Application Information

Connector Pinout

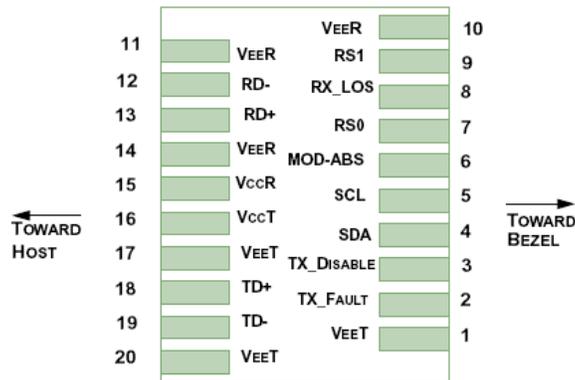

Electrical Pin Definition



PIN	Logic	Symbol	Name / Description	Note
1		VeeT	Module Transmitter Ground	1
2	LVTTL-O	TX_Fault	Module Transmitter Fault	
3	LVTTL-I	TX_Dis	Transmitter Disable; Turns off transmitter laser output	
4	LVTTL-I/O	SDA	2-Wire Serial Interface Data Line	2
5	LVTTL-I	SCL	2-Wire Serial Interface Clock	2
6		MOD_ABS	(=MOD_DEF0) Module Absent, shorted to module ground	
7	LVTTL-I	RS0	Receiver Rate Select	
8	LVTTL-O	RX_LOS	Receiver Loss of Signal Indication Active LOW	
9	LVTTL-I	RS1	Transmitter Rate Select	
10		VeeR	Module Receiver Ground	1
11		VeeR	Module Receiver Ground	1
12	CML-O	RD-	Receiver Inverted Data Output	
13	CML-O	RD+	Receiver Data Output	
14		VeeR	Module Receiver Ground	1
15		VccR	Module Receiver 3.3 V Supply	
16		VccT	Module Transmitter 3.3 V Supply	
17		VeeT	Module Transmitter Ground	1
18	CML-I	TD+	Transmitter Non-Inverted Data Input	
19	CML-I	TD-	Transmitter Inverted Data Input	
20		VeeT	Module Transmitter Ground	1

1. Module ground pins Vee are isolated from the module case.
2. Shall be pulled up with 1k-10k ohms to a voltage between 3.13 V and 3.47 V on the host board.

NUMBER GS-12-0974	TYPE Product Specification		
TITLE TRX10GDP0310C1 (SFP+ LR Module)		PAGE 8 of 14	REVISION A
		AUTHORIZED BY J. Blank	DATE 11 July 2011
CLASSIFICATION UNRESTRICTED			

Application Schematics

Recommended electrical connections to transceiver are shown below. Pull-ups: 1k – 10k ohms.

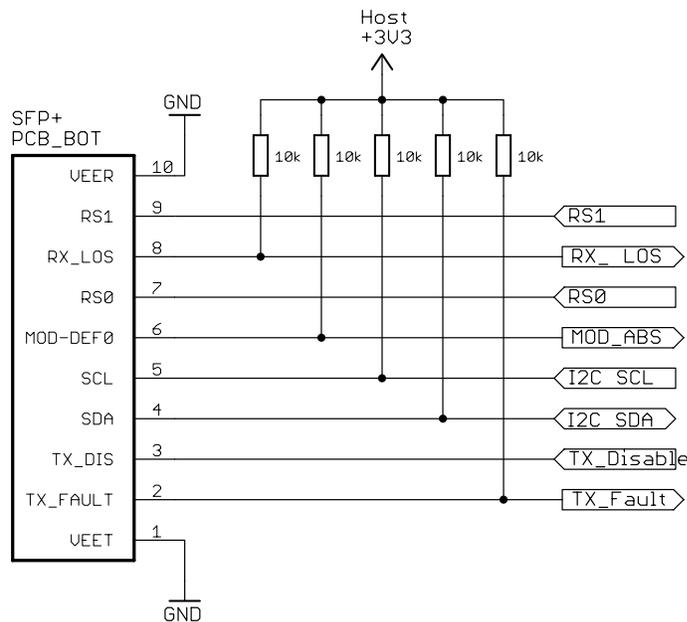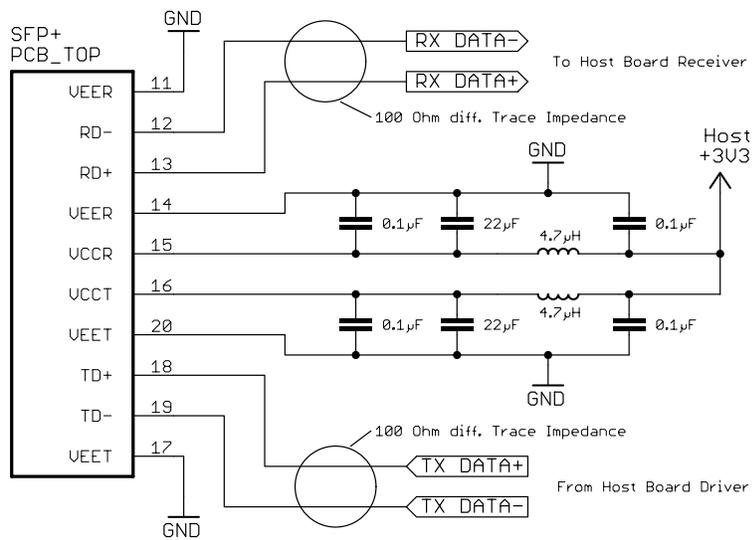

NUMBER GS-12-0974	TYPE Product Specification		
TITLE TRX10GDP0310C1 (SFP+ LR Module)		PAGE 9 of 14	REVISION A
		AUTHORIZED BY J. Blank	DATE 11 July 2011
CLASSIFICATION UNRESTRICTED			

Interfacing the Transceiver

Communication is done by a serial 2-wire interface compatible to the I2C bus protocol. Refer to SFF-8472 for a more detailed explanation of the registers:

Base Address A0h	
Register	Content
0 - 95	Serial Transceiver ID as defined in SFP MSA
96 - 127	FCI Specific
128 - 255	Reserved

Base Address A2h	
Register	Content
0 - 55	Alarm & Warnings Thresholds & Limits
56 - 95	External calibration constants (not used)
96 - 119	Values from real time diagnostic monitoring
128 - 247	Customer specific, writable area
248 - 255	Reserved

Digital Optical Monitoring

The transceiver offers the ability to monitor important module parameter during operation. All five parameters listed below are continuously monitored for getting information about the current module status. All data is calibrated internally; there is no need for external post processing.

Temperature

Internally measured temperature data is represented as two's complement of a signed 16-bit value in increments of 1/256 °C over a range of -40 to +100 °C. Accuracy is better than +/-3 °C.

Supply Voltage (VCC)

Internally measured supply voltage. Represented as a 16-bit unsigned integer with the voltage defined as the full 16 bit value (0 – 65535) with LSB equal to 100 µVolt, which yields to a total range of 0 to +6.55 Volts. Accuracy is better than +/-3 %.

Laser Bias Current

The DFB laser bias current is represented as a 16 bit unsigned integer with the current defined as the full 16-bit value (0 – 65535) with LSB equal to 2 µA. Accuracy is better than +/-10 %.

Optical Transmitter Power

TX output power measurement is based on internal monitor diode feedback. Represented as a 16-bit unsigned integer with the power defined as the full 16 bit value (0 – 65535) with LSB equal to 0.1 µW. Accuracy is better than +/-3 dB over a range of $P_{avg_{min}}$ to $P_{avg_{max}}$.


Receiver Optical Power

RX input power measurement is based on photodiode average current. Represented as a 16-bit unsigned integer with the power defined as the full 16 bit value (0 – 65535) with LSB equal to 0.1 µW. Accuracy is better than +/-3 dB over a range of -15 dBm to 0.5 dBm.

Note: The specified characteristics are met within the recommended range of operating conditions regarding temperature and voltage.

NUMBER GS-12-0974	TYPE Product Specification	FCI	
TITLE TRX10GDP0310C1 (SFP+ LR Module)		PAGE 10 of 14	REVISION A
		AUTHORIZED BY J. Blank	DATE 11 July 2011
CLASSIFICATION UNRESTRICTED			

Module Outline

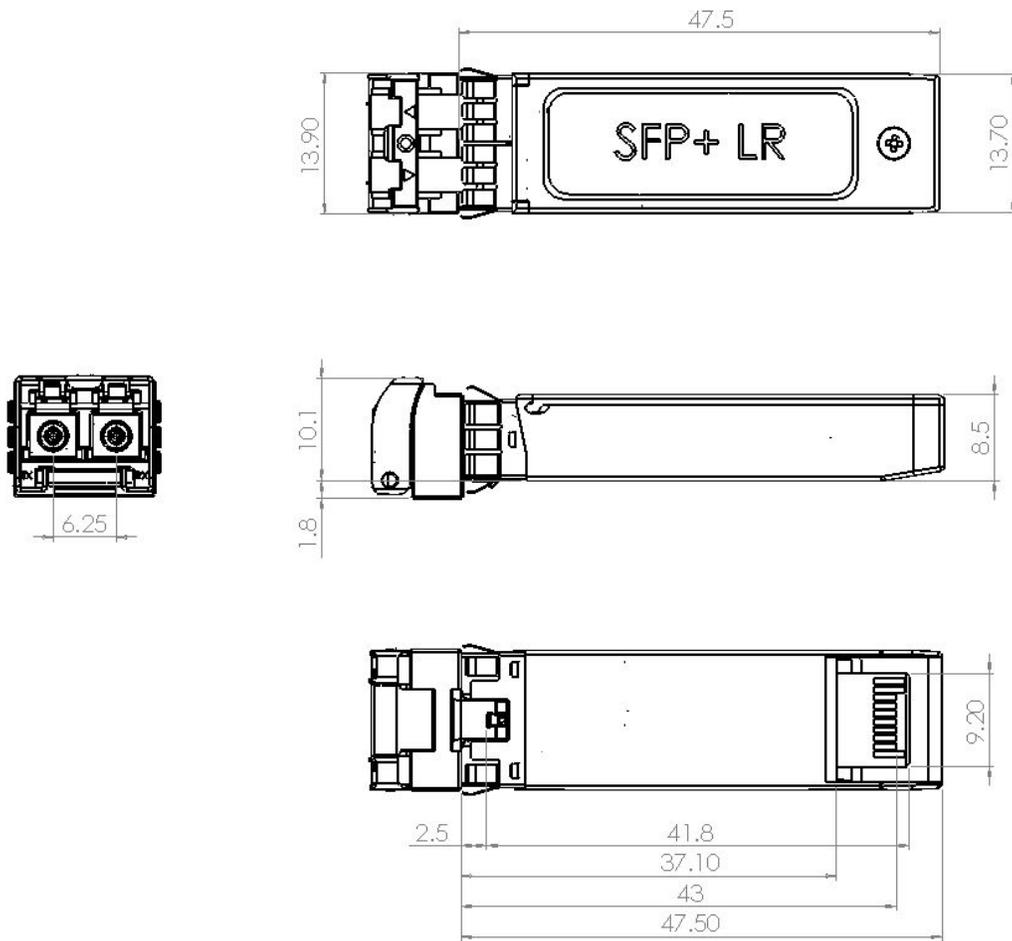

All dimensions shown are in millimeters.

NUMBER GS-12-0974	TYPE Product Specification		
TITLE TRX10GDP0310C1 (SFP+ LR Module)		PAGE 11 of 14	REVISION A
		AUTHORIZED BY J. Blank	DATE 11 July 2011
CLASSIFICATION UNRESTRICTED			

Module Safety & Compliance

FCI's SFP+ LR module is designed to meet international standards and requirements. The module is RoHS compliant according to the European Parliament requirements on the restriction of the use of hazardous substances in electrical and electronic equipment (RoHS). The module optical output power meets Class 1 requirements for laser safety.

Requirements	Standard
Module Safety	IEC 60950-1:2001 EN 60950-1:2001
RoHS Compliance	RoHS 6/6 Directive 2002/95/EC Amendment 4054 (2005/747/EC)
Laser Safety (Class 1)	CDRH 21 CFR 1040.10 and 1040.11 (according FDA) IEC 60825-1 Rev2 2007 (according IEC)

ESD & Electromagnetic Compatibility

Requirements	Standard	Value
EMI (Emission)	FCC Part 15 B EN 55022 Class B CISPR 22 30 MHz ... 40 GHz	At least 6 dB margin to Class B limit
EMI (Immunity)	IEC 61000-4-3, 10 MHz ... 1 GHz	No bit errors at sensitivity limit
ESD (Electrical connector)	EIA/JESD22-A114-B MIL-STD 883C Method 3015.7	≥ 2 kV ≥ 1 kV (SFI signals)
ESD (Module case)	Air Discharge EN61000-4-2, Criterion B	≥ 15 kV
ESD (Module case)	Contact Discharge EN61000-4-2, Criterion B	≥ 8 kV

NUMBER GS-12-0974	TYPE Product Specification		
TITLE TRX10GDP0310C1 (SFP+ LR Module)		PAGE 12 of 14	REVISION A
		AUTHORIZED BY J. Blank	DATE 11 July 2011
CLASSIFICATION UNRESTRICTED			

Eye Safety


This laser based singlemode transceiver is a Class 1 product. It complies with IEC 60825-1 Edition 2 and FDA performance standards for laser products (21 CFR 1040.10 and 1040.11) except for deviations pursuant to Laser Notice 50, dated July 26, 2001.

CLASS 1 LASER PRODUCT

To meet laser safety requirements the transceiver shall be operated within the Absolute Maximum Ratings.

Note: All adjustments have been made at the factory prior to shipment of the devices. No maintenance or alteration to the device is required. Tampering with or modifying the performance of the device will result in voided product warranty. Failure to adhere to the above restrictions could result in a modification that is considered an act of "manufacturing", and will require, under law, recertification of the modified product with the U.S. Food and Drug Administration (ref. 21 CFR 1040.10 (i)).

LASER EMISSION DATA

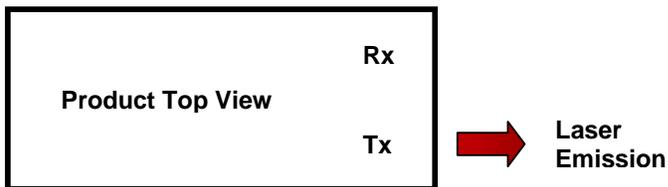

Wavelength	1310 nm
Maximum total output power (as defined by IEC: within 7 mm aperture at 70 mm distance)	15.6 mW / 11.9 dBm
Beam divergence (full angle) / NA (half angle)	11° / 0.1 rad

NUMBER GS-12-0974	TYPE Product Specification		
TITLE TRX10GDP0310C1 (SFP+ LR Module)		PAGE 13 of 14	REVISION A
		AUTHORIZED BY J. Blank	DATE 11 July 2011
CLASSIFICATION UNRESTRICTED			

Ordering Information

Application	Standard	Part Number
10G Ethernet LAN/WAN	IEEE 802.3 10GBASE-LR/LW	TRX10GDP0310C1
10G Fibre Channel	10GFC 1200-SM-LL-L	TRX10GDP0310C1

NUMBER GS-12-0974	TYPE Product Specification		
TITLE TRX10GDP0310C1 (SFP+ LR Module)		PAGE 14 of 14	REVISION A
		AUTHORIZED BY J. Blank	DATE 11 July 2011
		CLASSIFICATION UNRESTRICTED	

REVISION RECORD

Rev	Page	Description	EC#	Date
A		Initial version.		11 July 2011