
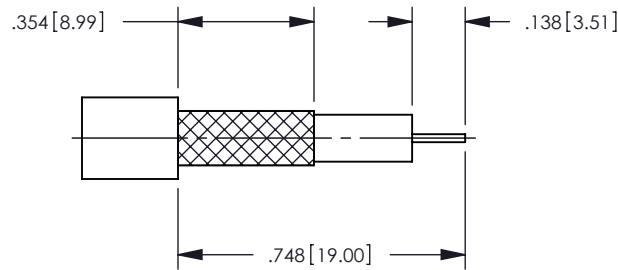
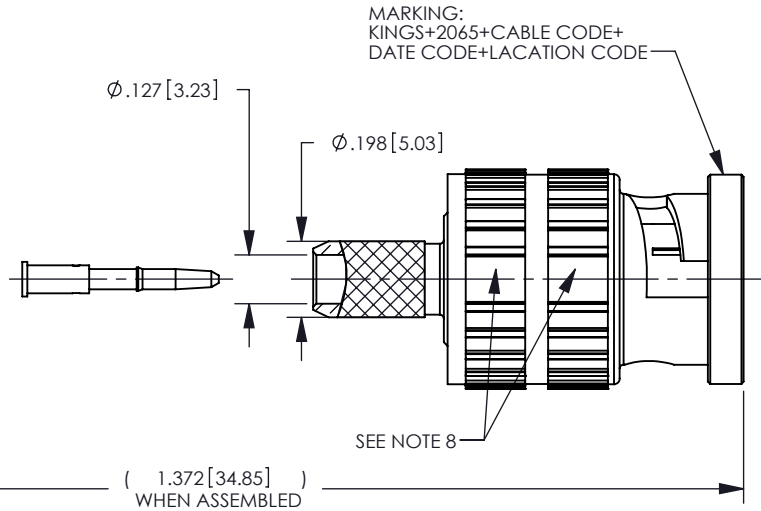


NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SDRPF-206.
2. MATERIAL SPECIFICATIONS:  
 BAYONET SLEEVE, BODY, CONTACT, FERRULE: BRASS PER ASTM B16  
 INSULATOR: TEFLON PER ASTM D1710  
 SPRING WASHER, OUTER CONTACT: BERYLLIUM COPPER, ASTM-B-194  
 GASKET: SILICONE RUBBER
3. FINISH SPECIFICATIONS:  
 BAYONET SLEEVE, BODY, FERRULE: .000100MIN NICKEL PER AMS-QQ-N-290  
 OVER COPPER FLASH PER ASTM B734 (ROHS)  
 CONTACT: .000030 MIN. GOLD PER ASTM B488, OVER NICKEL PER  
 AMS-QQ-N-290 (ROHS)  
 ALL OTHER METAL PARTS: .000050 MIN NICKEL PER AMS-QQ-N290 OVER  
 .000050 MIN COPPER PER ASTM B734
4. CONTACT AND FERRULE SHIPPED LOOSE.
5. FOR USE WITH TACHII CABLE TCX-3C2V & TCX-3C2VS OR EQUIVALENT.
6. FOR CRIMPING USE KINGS KTH-5000 & KTH-5005 (.232 HEX, .054 SQUARE FLAT).
7. ASSEMBLE TO CABLE USING CAP-E01.
8. THESE AREA HAVE WHITE MARKING.
9. ELECTRIC SPECIFICATIONS:  
 IMPEDANCE: 75 OHMS  
 FREQUENCY RANGE: DC TO 3 GHz  
 RETURN LOSS: 25 dB MIN (DC TO 3 GHz)

REV	DESCRIPTION	BY DATE	APPD
C	REVISED PER ECR-ER17437	CTC 09/09/09	CTC

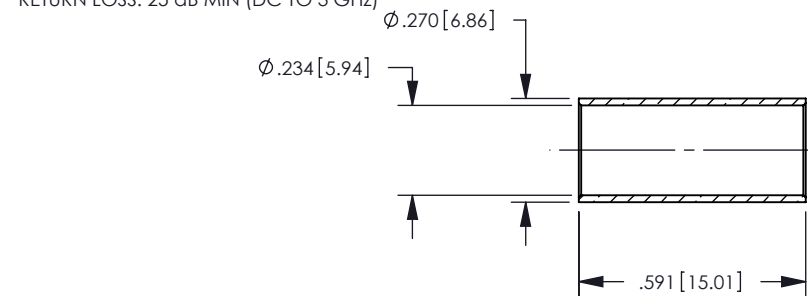

RECOMMENDED CABLE TRIMMING DIMENSIONS

CATALOG P/N: 2065-E00-3C201N

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .0005 ANGLES: ± 2° SCALE: 2:1				 <b>Winchester Electronics</b> Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
<b>CUSTOMER DRAWING</b>					
DRAWN CY	DATE 03/21/08	APPROVED RAF	DATE 03/26/08	<b>BNC 75 PLUG          FOR TACHII TCX-3C2V(S)          (ROHS COMPLIANT)</b>	
APPROVED DCT	DATE 03/26/08	APPROVED DCam	DATE 03/26/08	<b>A</b>	SD2065-E00-3C201N SHT 1 OF 1
				REV C	