


Turns Ratio ( ± 2% )	1:1:1:1
----------------------	---------

# F-1352


## COMMON MODE CHOKE

PARAMETER	MIN.	MAX.	UNITS
	Open Circuit Inductance Test Level = .016V Test Frequency = 100.0 KHz	36	
Leakage Inductance Test Level = .016V Test Frequency = 1 MHz		0.3	μHy
Interwinding Capacitance (C <sub>w/w</sub> ) Test Frequency = 1 MHz		25	pF
DCR		0.2	ohms
Parallel Impedance Test Voltage = .016V Test Frequency = 10 MHz	1000		ohms
Isolation (HI-POT)	500		VRMS

### SCHEMATIC DIAGRAM:



Common Mode Attenuation (dB)							
100k	1M	10M	30M	50M	100M	300M	500M
8	24	37	40	40	38	30	20

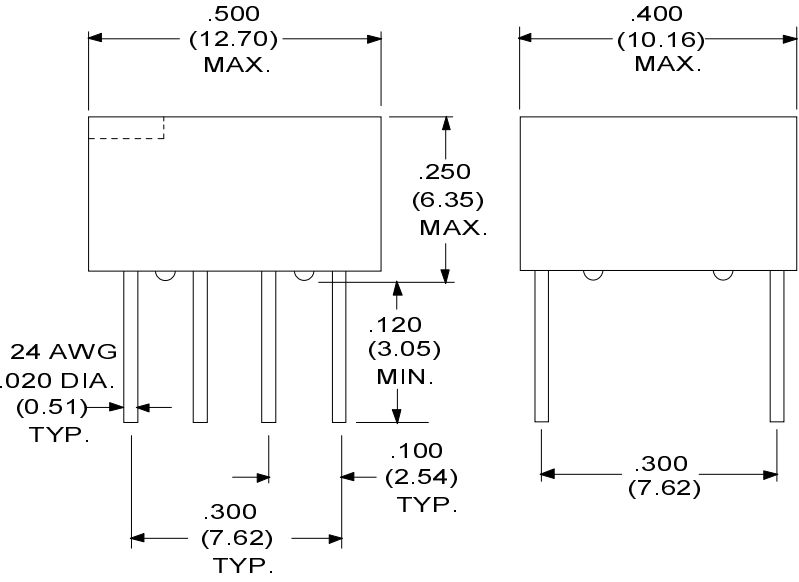

### PHYSICAL DIMENSIONS

All dimensions in inches (mm)

RHOMBUS P/N:	
CUST P/N:	NAME: 6/25/94
DATE: 07/02/98	SHEET: 1 OF 1