



EVERLIGHT ELECTRONICS CO., LTD.

Device Number : CDLE-125-062 REV: 1

3.0mm Round Type LED Lamps

MODEL NO : 1254SYGD/S530-E2 ECN : _____ Page: 1/4


■ Features :

- LOW POWER CONSUMPTION.
- LONG LIFE FEATURE
- RELIABLE AND RUGGED

■ Description :

- The LED lamp is available with a choice of different colors, light intensities, epoxy colors, etc.

■ Package Dimension:

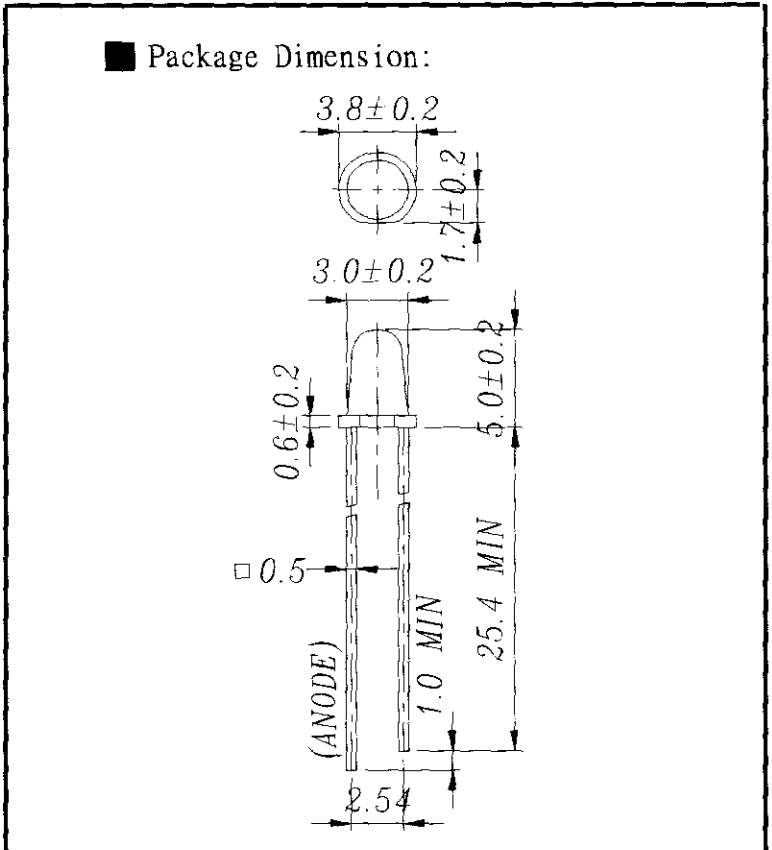

■ Applications :

- Audio Equipment
- Monitor
- Car meter
- Computer

■ NOTES :

- 1.All dimensions are millimeters(inch), tolerance is 0.25 mm except be specified.
- 2.An epoxy meniscus may extend about is 1.5mm(0.059") down the lead.

PART NO	CHIP		Lens Color
	Material	Emitted Color	
1254SYGD/S530-E2	AlGaInP	Super Yellow Green	Green Diffused

DESIGNER	CHECKER	APPROVED
 恆光研一 OCT 20 1999 肖亮		 恆光研一 99.10.21 劉國林

Office : 7C Building, Lian Hua Port Industrial District, Lian Hua Shan Bonded Processing Zone Pan Yu, Guang Zhou, China
 TEL : (020)84860913,84860914
 FAX : (020)84860600

9901005



EVERLIGHT ELECTRONICS CO., LTD.

Device Number : CDLE-125-062 REV: 1

3.0mm Round Type LED Lamps

MODEL NO : 1254SYGD/S530-E2 ECN : Page: 2/4

Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Forward Current	I_f	25	mA
Reverse Voltage	V_r	5	V
Reverse Current	I_r	10	μA
Operating Temperature	T_{opr}	-40 to +85	$^\circ\text{C}$
Soldering Temperature	T_{sol}	260 ± 5	$^\circ\text{C}$
Power Dissipation	P_d	100	mW
Peak Forward Current (Duty 1/10 @ 1KHZ)	$I_f(\text{Peak})$	180	mA

Electronic Optical Characteristics :

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous intensity	I_v	63.0	160.0	/	mcd	$I_f = 20\text{ mA}$
Viewing Angle	$2\theta_{1/2}$	/	30	/	deg	$I_f = 20\text{ mA}$
Peak Wavelength	λ_p	/	575	/	nm	$I_f = 20\text{ mA}$
Dominant Wavelength	λ_d	/	573	/	nm	$I_f = 20\text{ mA}$
Spectrum Radiation Bandwidth	$\Delta\lambda$	/	20	/	nm	$I_f = 20\text{ mA}$
Forward Voltage	V_f	1.70	2.00	2.40	V	$I_f = 20\text{ mA}$



EVERLIGHT ELECTRONICS CO., LTD.

Device Number : CDLE-125-062 REV: 1


3.0mm Round Type LED Lamps

MODEL NO : 1254SYGD/S530-E2 ECN : _____ Page: 3/4


Typical Electro-Optical Characteristic Curves

(SYG)



Spectrum Distribution

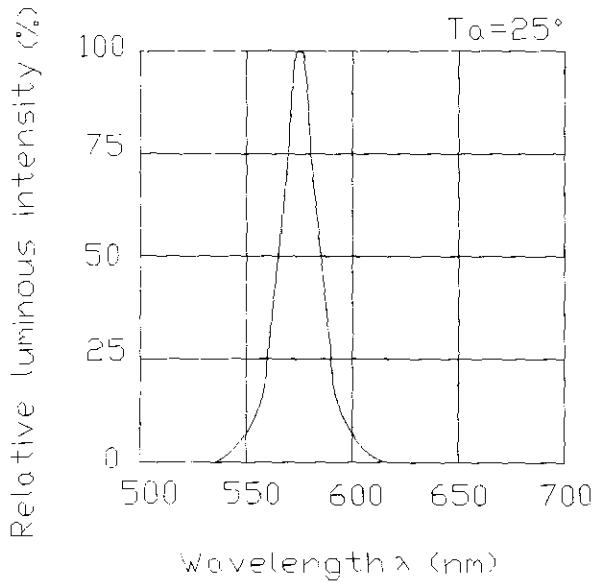

Forward Current vs. Forward Voltage

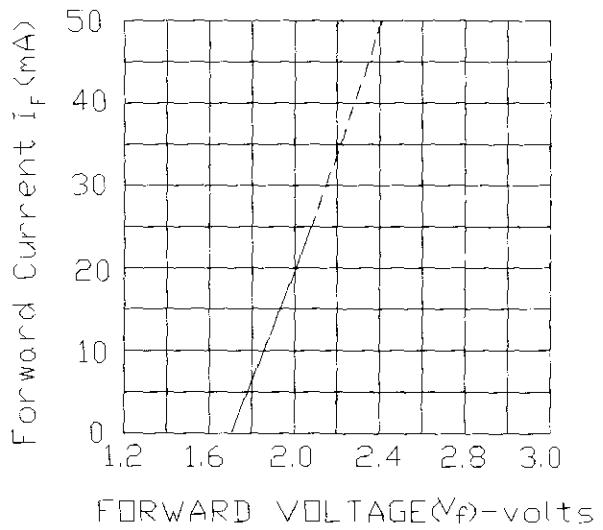

Forward Current Derating Curve

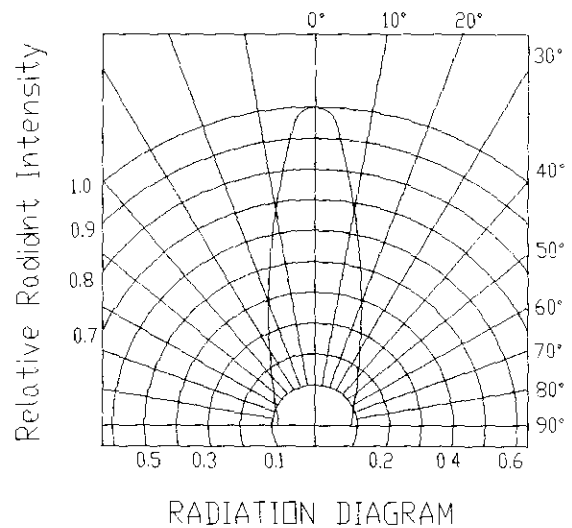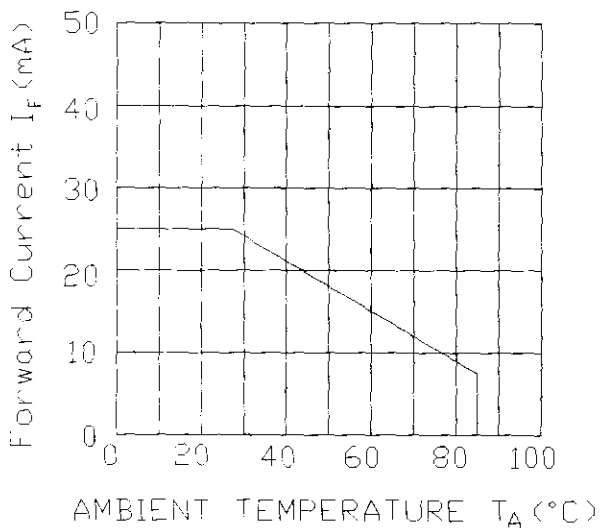



EVERLIGHT ELECTRONICS CO., LTD.

Device Number : CDLE-125-062 REV: 1

3.0mm Round Type LED Lamps

MODEL NO : 1254SYGD/S530-E2 ECN : _____ Page: 4/4

■ Reliability test item and condition

No	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 Pcs	0/1
2	Temperature Cycle	H : +85°C 30min ∩ 5 min L : -55°C 30min	50 CYCLE	76 Pcs	0/1
3	Thermal Shock	H : +100°C 5min ∩ 10 sec L : -10°C 5min	50 CYCLE	76 Pcs	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 Pcs	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 Pcs	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 Pcs	0/1
7	High Temperature / High Humidity	85°C /85% RH	1000 HRS	76 Pcs	0/1