


General Description

The AON1611 combines advanced trench MOSFET technology with a low resistance package to provide extremely low $R_{DS(ON)}$. This device is ideal for load switch and battery protection applications.

Features

V_{DS}	-20V
I_D (at $V_{GS}=-4.5V$)	-4A
$R_{DS(ON)}$ (at $V_{GS}=-4.5V$)	< 58mΩ
$R_{DS(ON)}$ (at $V_{GS}=-2.5V$)	< 76mΩ
$R_{DS(ON)}$ (at $V_{GS}=-1.8V$)	< 98mΩ
$R_{DS(ON)}$ (at $V_{GS}=-1.5V$)	< 120mΩ



Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Maximum	Units
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	± 8	V
Continuous Drain Current ^G	I_D	-4	A
$T_A=70^\circ\text{C}$		-3	
Pulsed Drain Current ^C	I_{DM}	-16	
Power Dissipation ^A	P_D	1.8	W
$T_A=70^\circ\text{C}$		1.15	
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	°C

Thermal Characteristics

Parameter	Symbol	Typ	Max	Units
Maximum Junction-to-Ambient ^A $t \leq 10\text{s}$	$R_{\theta JA}$	56	70	°C/W
Maximum Junction-to-Ambient ^{A,D} Steady-State		88	110	°C/W

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	$I_D=-250\mu\text{A}, V_{GS}=0\text{V}$	-20			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=-20\text{V}, V_{GS}=0\text{V}$ $T_J=55^\circ\text{C}$			-1 -5	μA
I_{GSS}	Gate-Body leakage current	$V_{DS}=0\text{V}, V_{GS}=\pm 8\text{V}$			± 10	μA
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=-250\mu\text{A}$	-0.3	-0.6	-0.9	V
$I_{\text{D(ON)}}$	On state drain current	$V_{GS}=-10\text{V}, V_{DS}=-5\text{V}$	-16			A
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{GS}=-4.5\text{V}, I_D=-4\text{A}$ $T_J=125^\circ\text{C}$		46 64.5	58 80	$\text{m}\Omega$
		$V_{GS}=-2.5\text{V}, I_D=-3\text{A}$		58	76	$\text{m}\Omega$
		$V_{GS}=-1.8\text{V}, I_D=-2\text{A}$		74	98	$\text{m}\Omega$
		$V_{GS}=-1.5\text{V}, I_D=-1\text{A}$		88	120	$\text{m}\Omega$
g_{FS}	Forward Transconductance	$V_{DS}=-5\text{V}, I_D=-4\text{A}$		15		S
V_{SD}	Diode Forward Voltage	$I_S=-1\text{A}, V_{GS}=0\text{V}$		-0.66	-1	V
I_S	Maximum Body-Diode Continuous Current				-2.5	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=-10\text{V}, f=1\text{MHz}$		550		pF
C_{oss}	Output Capacitance			93		pF
C_{rss}	Reverse Transfer Capacitance			64		pF
R_g	Gate resistance	$V_{GS}=0\text{V}, V_{DS}=0\text{V}, f=1\text{MHz}$		12		Ω
SWITCHING PARAMETERS						
$Q_{\text{g}(4.5\text{V})}$	Total Gate Charge	$V_{GS}=-4.5\text{V}, V_{DS}=-10\text{V}, I_D=-4\text{A}$		7	10	nC
Q_{gs}	Gate Source Charge			1		nC
Q_{gd}	Gate Drain Charge			1.8		nC
$t_{\text{D(on)}}$	Turn-On Delay Time	$V_{GS}=-4.5\text{V}, V_{DS}=-10\text{V}, R_L=2.5\Omega, R_{\text{GEN}}=3\Omega$		15		ns
t_r	Turn-On Rise Time			33		ns
$t_{\text{D(off)}}$	Turn-Off Delay Time			50		ns
t_f	Turn-Off Fall Time			43		ns
t_{rr}	Body Diode Reverse Recovery Time	$I_F=-4\text{A}, dI/dt=100\text{A}/\mu\text{s}$		16		ns
Q_{rr}	Body Diode Reverse Recovery Charge	$I_F=-4\text{A}, dI/dt=100\text{A}/\mu\text{s}$		6.5		nC

A. The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$. The Power dissipation P_{DSM} is based on $R_{\theta JA}$, $t \leq 10\text{s}$ value and the maximum allowed junction temperature of 150°C . The value in any given application depends on the user's specific board design.

B. The power dissipation P_D is based on $T_{J(\text{MAX})}=150^\circ\text{C}$, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.

C. Repetitive rating, pulse width limited by junction temperature $T_{J(\text{MAX})}=150^\circ\text{C}$. Ratings are based on low frequency and duty cycles to keep initial $T_J=25^\circ\text{C}$.

D. The $R_{\theta JA}$ is the sum of the thermal impedance from junction to case $R_{\theta JC}$ and case to ambient.

E. The static characteristics in Figures 1 to 6 are obtained using <300μs pulses, duty cycle 0.5% max.

F. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of $T_{J(\text{MAX})}=150^\circ\text{C}$. The SOA curve provides a single pulse rating.

G. The maximum current rating is package limited.

H. These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

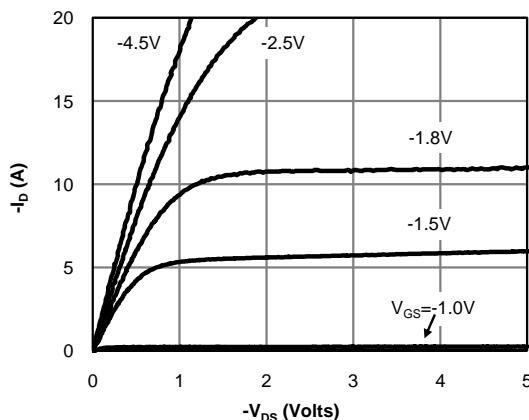


Fig 1: On-Region Characteristics (Note E)

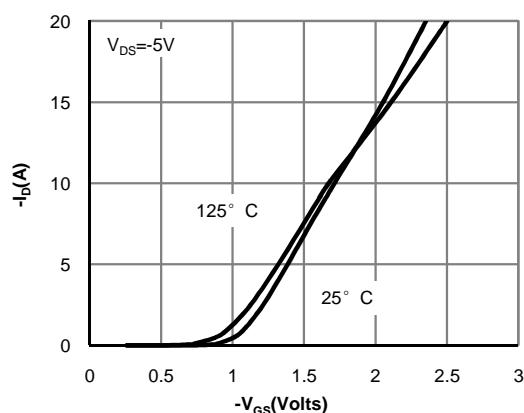


Figure 2: Transfer Characteristics (Note E)

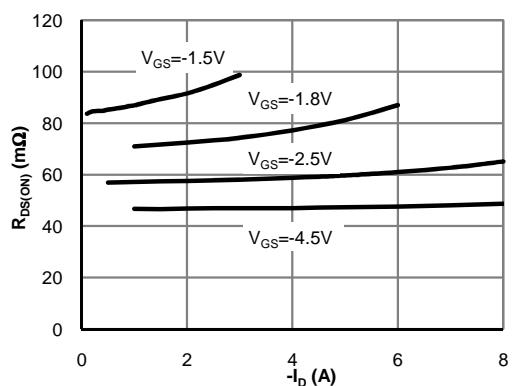


Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

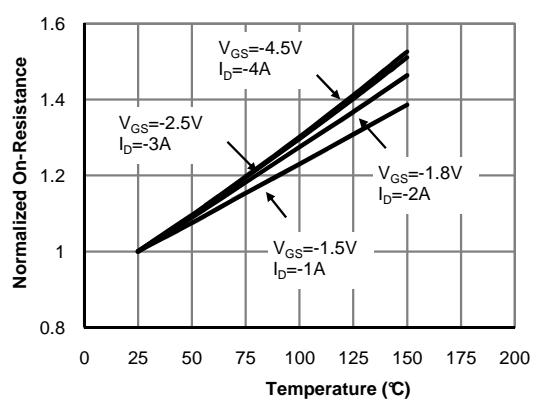


Figure 4: On-Resistance vs. Junction Temperature (Note E)

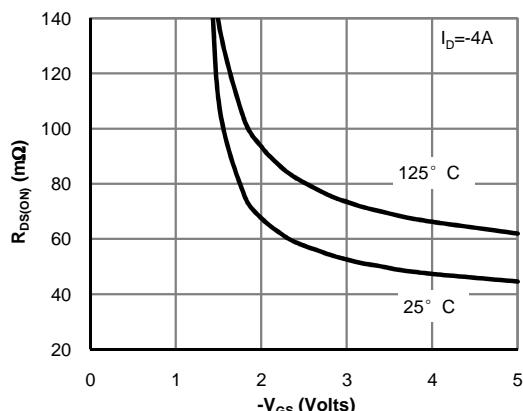


Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)







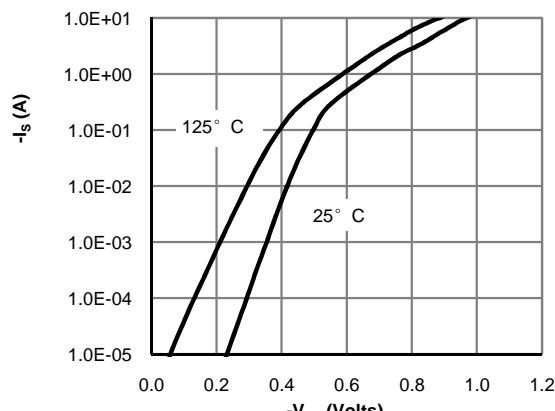



Figure 6: Body-Diode Characteristics (Note E)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS


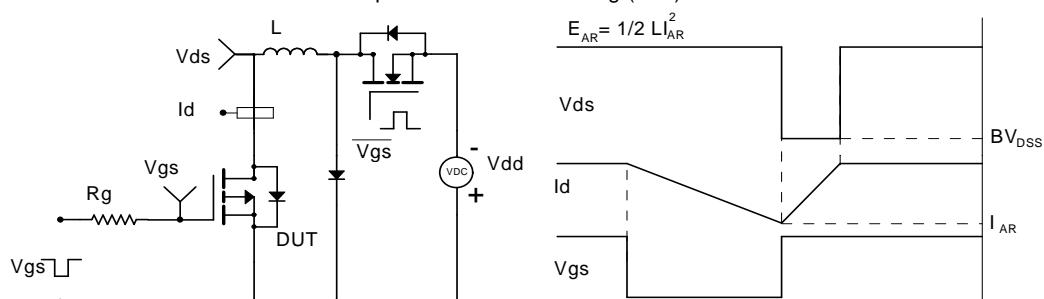
Gate Charge Test Circuit & Waveform

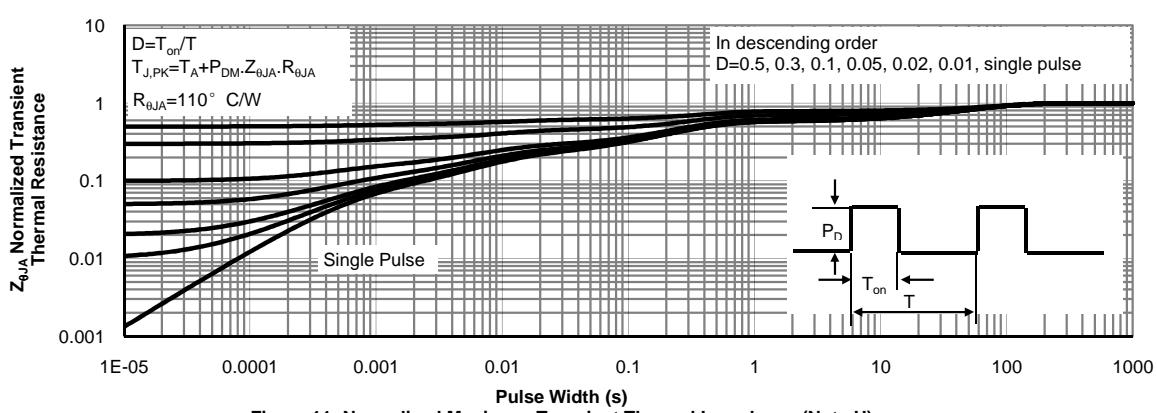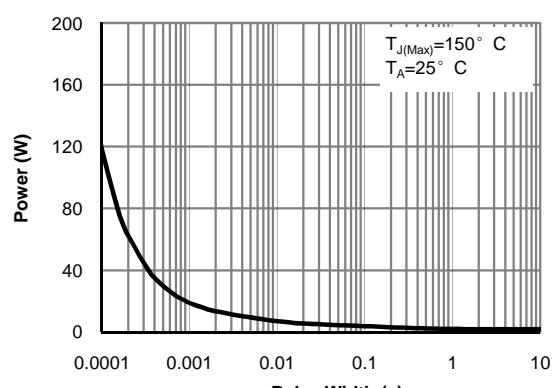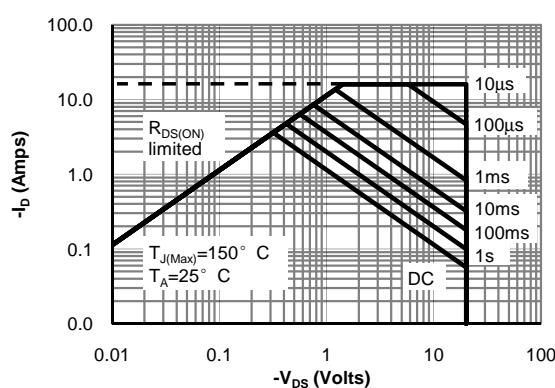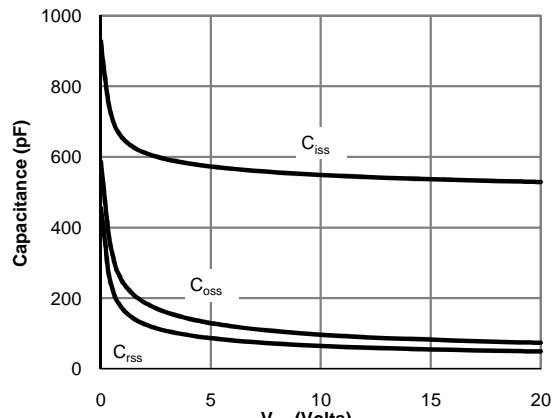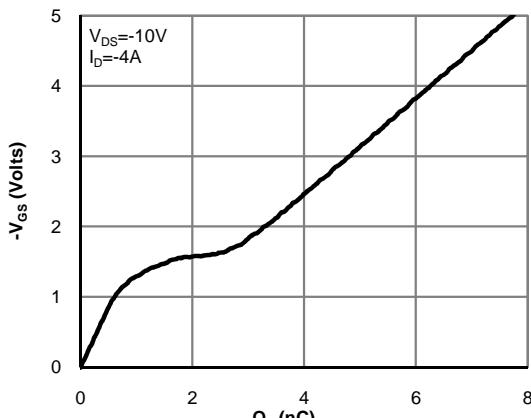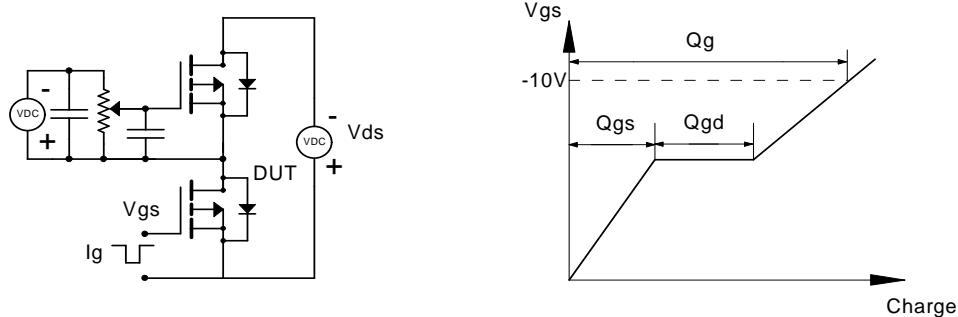

Resistive Switching Test Circuit & Waveforms

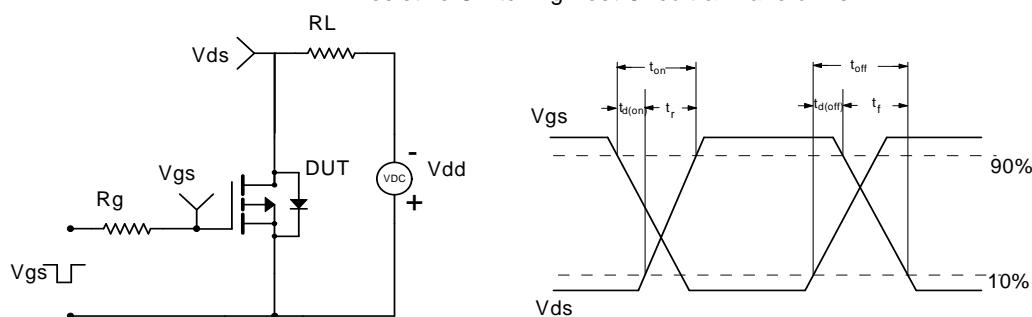

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms



Diode Recovery Test Circuit & Waveforms

