


**Q-50AC SPDT, .3 Amp, 28 VDC**

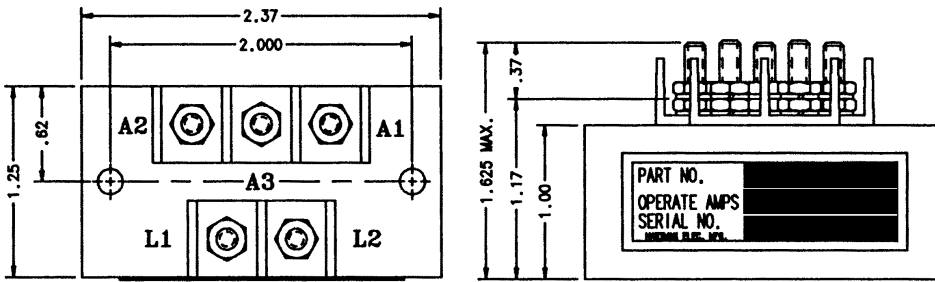


Dimensions for this product are expressed in inches. Multiply values by 25.4 for millimeters.

**Features:**

- SPDT Main Contacts
- Current Indicator
- Epoxy Encapsulated
- 28 VDC
- .3 Amp
- High Reliability
- Meets many requirements of MIL-R-6106

**CONTACTOR CONFIGURATION**

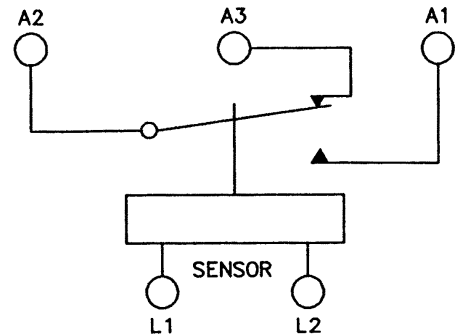

**Notes:**

PRODUCT SPECIFICATIONS	
Operating Characteristics:	
Operating Voltage	28 VDC
Pick-Up	.3 Amp Maximum
Drop-Out	.1 Amp Minimum
Continuous	2 Amps DC
Overload	10 Amps for 5 Seconds
Output SPDT	.2 Amp Res 28 VDC
Temperature	-55°C to +71°C
Weight Maximum	5 Oz.
Lamp Load	.080 Amp
Altitude	60,000 Feet Maximum

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved. HARTMAN and TYCO are trademarks.