

NOTES: UNLESS OTHERWISE SPECIFIED
1. INTERFACE COMPLIANT TO SMPTE 304 SPECIFICATION.


2. MATERIAL SPECIFICATIONS:
CONTACTS: COPPER ALLOY
CRIMP SLEEVE: PHOS. BRONZE
O-RING: SILICONE RUBBER
SHIELD GROUND: 303 STAINLESS STEEL PER ASTM A582

3. FINISH SPECIFICATIONS:
STAINLESS STEEL PARTS: PASSIVATE
CONTACTS: .000100 MIN GOLD PER ASTM B488 OVER
.000080 MIN NICKEL PER AMS-QQN-290 (RoHS)
CRIMP SLEEVE: .000100 MIN NICKEL PER AMS-QQ-N-290 OVER
COPPER FLASH PER ASTM B734 (RoHS)

4. REPLACEMENT KIT FOR ASSEMBLY: 7765-3-3

5. USE CABLE ASSEMBLY PROCEDURE CAP-E05

REV	DESCRIPTION	BY DATE	APPD
A	RELEASED PER ER22697	PSM 04/08/09	WPM

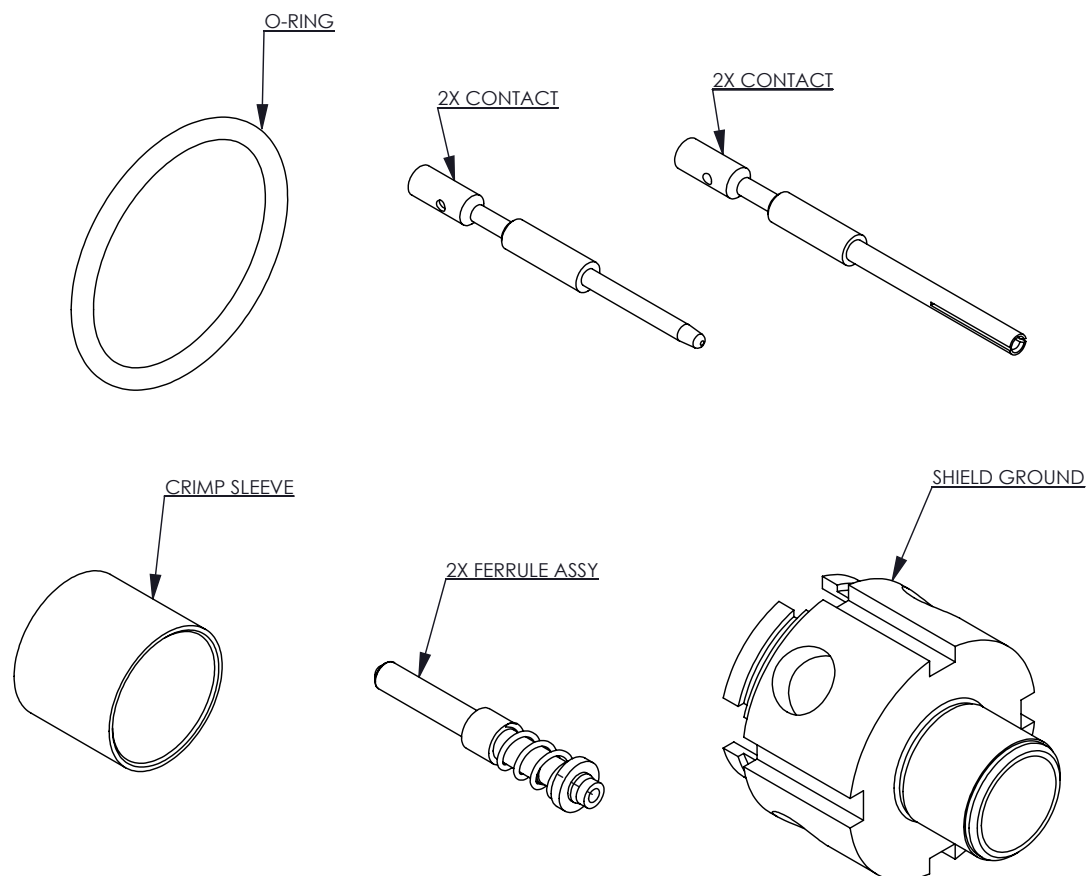

CATALOG P/N: 7760-000-00701Z

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 2:1				KINGS® by WINCHESTER Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492			
CUSTOMER SALES DRAWING				KIT - CONTACT			
DRAWN PSM	DATE 03/30/09	APPROVED WPM	DATE 08/17/09	A SD7760-000-00701Z			
APPROVED RL	DATE 08/17/09	APPROVED JF	DATE 08/17/09				
				SHT 1	OF 1	REV A	